
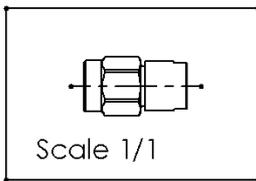
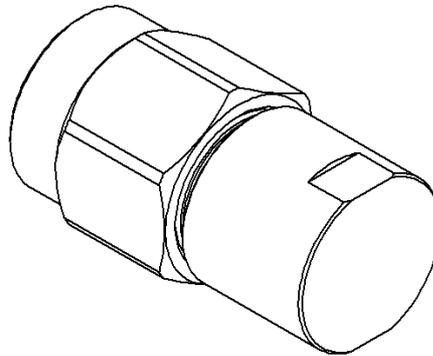


COAXIAL TERMINATION SMA MALE

R404.213.000

26.5 GHZ 2W Z50

Series : **CHARGE**

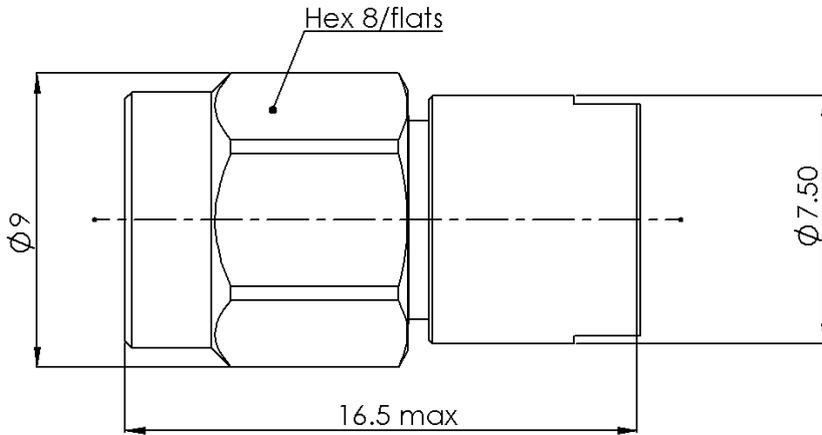

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING(µm)
BODY	STAINLESS STEEL	PASSIVATED
CENTER CONTACT	BERYLLIUM COPPER	GOLD 2.5 OVER NICKEL 1
OUTER CONTACT		
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
SUBSTRATE	ALUMINA	
RESISTOR	THIN FILM	
OTHERS PARTS		

Issue : 0850 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



COAXIAL TERMINATION SMA MALE

26.5 GHZ 2W Z50

R404.213.000

Series : **CHARGE**

ELECTRICAL CHARACTERISTICS

Frequency (GHz)	0 - 4	4 - 12.4	12.4 - 18	18 - 26.5
V.S.W.R (≤)	1.05	1.10	1.20	1.30


Operating Frequency Range	DC - 26.5	GHz
Impedance	50	Ω
DC Resistance	50	Ω ± 5%
Peak power at 25°C (1μs, 1%)	100	W
Average power at 25°C	2	W (Free Air Cooled)
		W (Conduction Cooled)

MECHANICAL CHARACTERISTICS

Connectors	SMA	Male	MIL C39012
Weight	4,2700 g		

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-55/+125 °C
Storage temperature range	-55/+125 °C

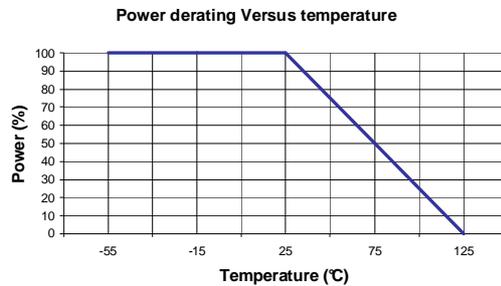

SPECIFICATION

OTHER CHARACTERISTICS

Issue : 0850 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

