


GAS CAPSULE 600V 20KA

R445.999.107

Series : **GDT**

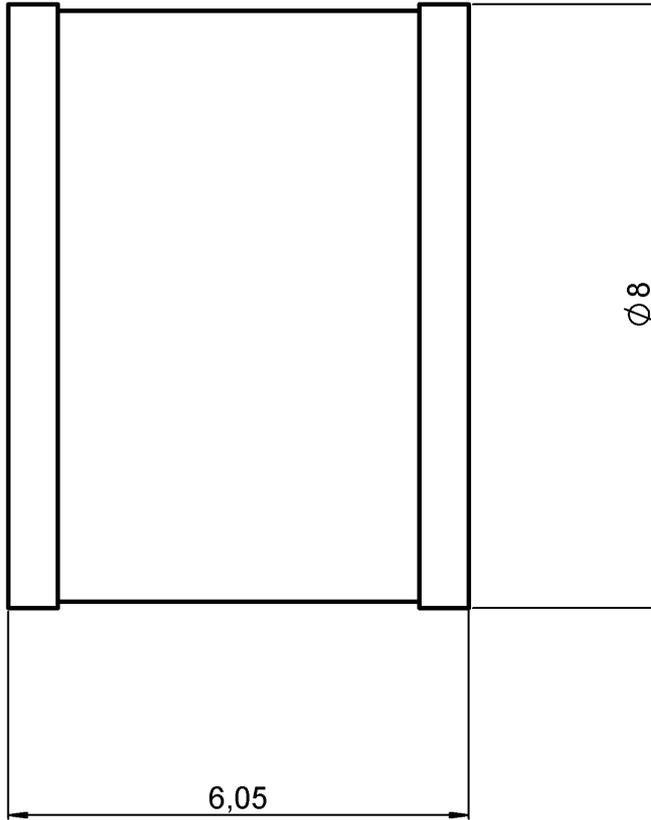

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
ELECTRODE INSULATOR		

Issue : 0514 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

GAS CAPSULE 600V 20KA**R445.999.107**Series : **GDT****PACKAGING**

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Nominal DC spark-over voltage :	600V +/-20%
Impulse spark-over voltage at 1 kV/ μ s :	>1050V
Nominal impulse discharge current (wave 8/20 μ s)	20kA
NA Nominal alternating discharges current (50Hz,	25kA
Insulation resistance :	10^{10} Ohm at 100V
Capacitance :	<1.5 pF

MECHANICAL CHARACTERISTICSWeight : **1.5 g****ENVIRONMENTAL**

Operating temperature	-40/+90 ° C
Storage temperature	-40/90 ° C
Relative humidity	Atm.cm3/s
Climatic category (IEC 68-1)	40/90/21

Issue : 0514 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.