





PART NO.				RFF-1405-D1			
REV	DESCRIPTION	DWN	DATE	APPROVED			
—	ENGINEERING RELEASE	CZS	01/13/10	JDMc			

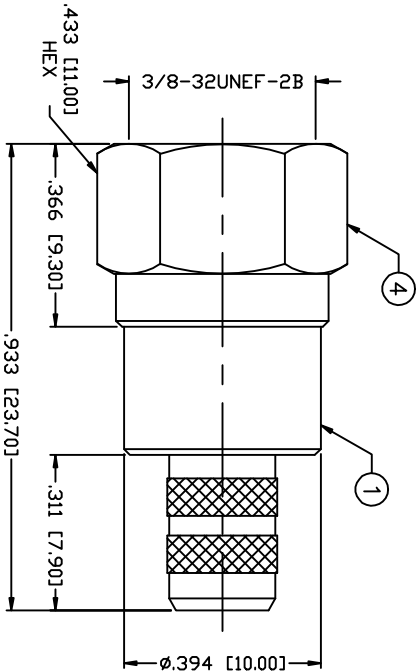

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

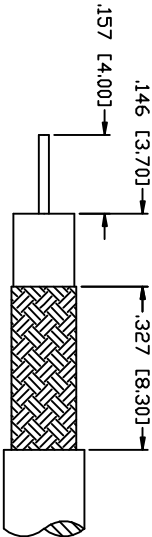

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 75 Ohms
 FREQUENCY RANGE: 0–1 GHz
 WORKING VOLTAGE: 500 V rms max. @ sea level
 (D1) FOR BELDEN 1426A, 1505A, 8212, 8241F, 9100, 9110, 9165, 9171, 9240, 9259, 9265, 9274, 9275, 9659, YR2393D; CommScope 5553, 5565, 5552, 5550, 5567, 5571

#	DESCRIPTION	QTY	MATERIAL	FINISH
6	FERRULE	1	BRASS	NICKEL, 100µ"
5	GROUND RING	1	BRASS	NICKEL, 100µ"
4	SHELL	1	BRASS	NICKEL, 100µ"
3	PIN	1	BRASS	GOLD, 3/2"
2	INSULATOR	1	DELIRIN	---
1	BODY	1	BRASS	NICKEL, 100µ"

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		RoHS COMPLIANT		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.	
DRAWN C. ZUNIGA CHECKED C. ZUNIGA		06/30/10		RF Communications DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX	
SIZE A CABLE GROUP D1		DWG NO. RFF-1405-D1		REV —	
SCALE: NTS		ENGINEERING ID: 008974		SHEET 1 OF 1	

F PLUG, CRIMP