




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

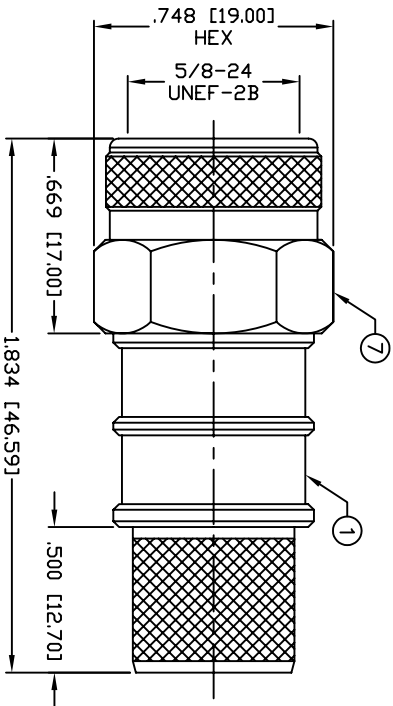


RECOMMENDED CRIMP DIE: .610"

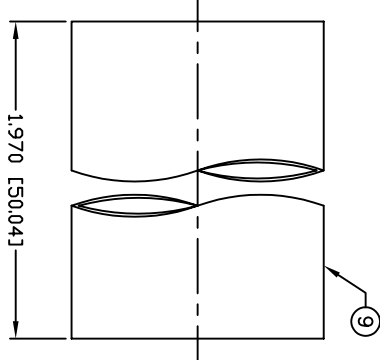


SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–11 GHz
WORKING VOLTAGE: 1k V rms Max. @ Sea Level
VSWR MAX: 1.3
INSERTION LOSS(dB): $0.6 \times \sqrt{f(\text{GHz})}$
CONTACT RESISTANCE: $\leq 6 \text{ m Ohm}$
INSULATION RESISTANCE: $\geq 10^9 \text{ Ohm min.}$
TEMPERATURE RANGE: –65°C TO 85°C
FOR TIMES LMR–600, LMR–600 ULTRAFLEX & T–COM–600

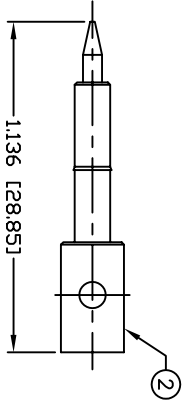

RECOMMENDED CRIMP DIE: .184"

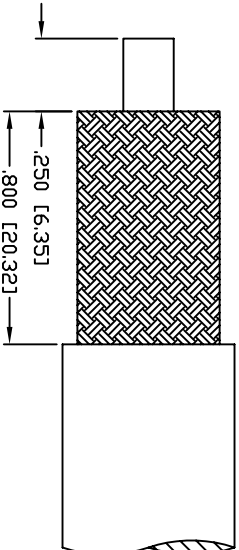

RECOMMENDED STRIPPING DIMENSIONS

14					
13					000494
12					
11					
10					
9	TUBING	1	HEAT SHRINK	---	
8	FERRULE	1	BRASS	WHITE BRONZE	
7	SHELL	1	BRASS	WHITE BRONZE	
6	GASKET	1	SI RUBBER	---	
5	SPLIT LOCK WASHER	1	BRASS	WHITE BRONZE	DRAWN C: ZUNIGA
4	GROUND RING	1	BRASS	WHITE BRONZE	CHECKED
3	INSULATOR	1	PTFE	---	
2	PIN	1	BRASS	GOLD, $3\mu''$	ORU DRAWN C: ZUNIGA
1	BODY	1	BRASS	WHITE BRONZE	03/13/09
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]
UNLESS OTHERWISE NOTED
TOLERANCES ARE:
DECIMALS DIAMETER

DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

N PLUG, CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	L2	RFN-1006-9L2	—

SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1