

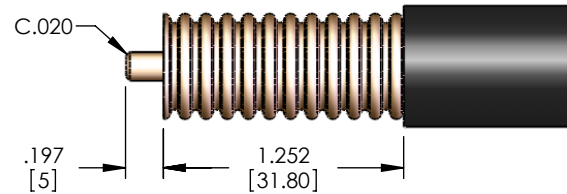





RFU-520-H1

REV	DESCRIPTION	DATE	APPR
-	ENGINEERING RELEASE	11/20/08	JDM

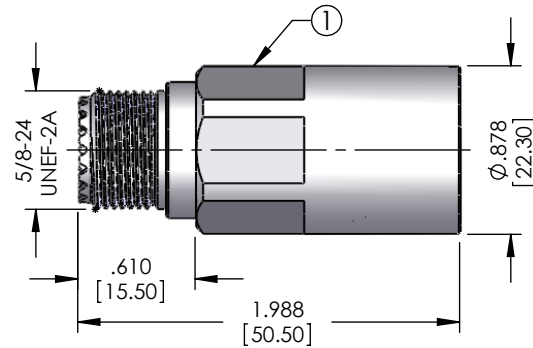

RECOMMENDED STRIPPING DIMENSIONS

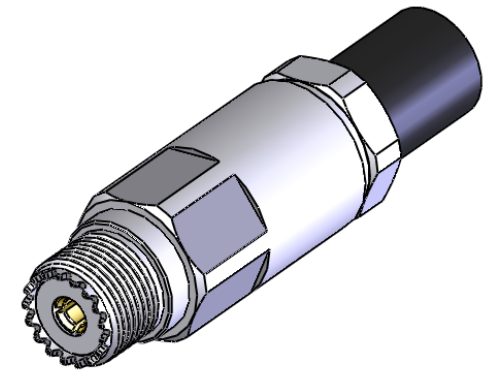

SPECIFICATIONS:

IMPEDANCE: NON CONSTANT
 FREQUENCY RANGE: 0-300 MHz
 WORKING VOLTAGE: 500 V rms Max. @ Sea Level
 FOR ANDREW LDF4-50A & LDF4RN-50A, CELWAVE 810918-001
 CABLEWAVE FLC12-50J & EUPEN 5128 CABLE

NOTE: SILICONE LUBRICATOR INCLUDED (NOT SHOWN)

7	LUBE	NONE	SILICONE	NONE	1	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES ALL DIMENSIOS ARE FOR REFERENCE ONLY	ENG APPR.			TITLE: UHF JACK, CLAMP		
6	O-RING	023-10X-002-LR	SILICONE RUBBER	NONE	1		PROPRIETARY AND CONFIDENTIAL					
5	O-RING	023-10X-001-LR	SILICONE RUBBER	NONE	1		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RF INDUSTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RF INDUSTRIES IS STRICTLY PROHIBITED.					
4	INSULATOR	010-06X-001-TX	PTFE	NONE	1							
3	SPRING CLAMP	003-06X-001-BT	Brass	WHITE BRONZE	1							
2	CONTACT	008-06F-006-PT	PHOSPHOR BRONZE	SILVER	1	CABLE GROUP	H1			SIZE	DWG. NO.	REV
1	BODY	001-06F-001-BT	Brass	WHITE BRONZE	1	CODE	008974			A	RFU-520-H1	-
#	DESCRIPTION	PART NUMBER	MATERIAL	FINISH	QTY.				SCALE: NTS		NOTES:	SHEET 1 OF 1