


1200 ~ 1600 MHz Super Low Noise Amplifier¹

RLAC1216A is an ultra low noise figure, wideband, and unconditionally stable SMT packaged amplifier with exceptionally low input and output VSWR. The amplifier offers a typical 0.50 dB noise figure, 20 dB input and output return losses, 31.0 dB gain, and 10 dB output P_{1dB} over the GPS and DGPS frequency bands from 1200 MHz to 1600 MHz. It is most suitable for GPS receivers, wireless data communications, and wireless measurement applications.

RLAC1216A is designed to meet the rugged standards of MIL-STD-202, MIL-STD-883, and MIL-STD-810F.

Lead-Tin and **RoHS** compliant versions are both available.

A surface mount version is also available, RLAS1216A.



Key Features:

Wide frequency range: 1200 ~ 1600 MHz
 Ultra low noise: 0.50 dB
 Very low VSWR: 1.22:1
 Impedance: 50 Ohm
 Unconditional stable: $k > 1$
 Single DC Supply: 40 mA @ +3.3V
 MTBF²: >600,000 hrs (68 Years)
 Small Size: 1.00"x1.08"x0.41"
 Built-In Functions: DC blocks at input and output ports, temperature compensation circuitry

Absolute Maximum Ratings³:

Parameters	Symbol	Absolute Max	Units
DC Power Supply Voltage	V_{dd}	4.5	V
Drain Current	I_{dd}	70	mA
Total Power Dissipation	P_{diss}	350	mW
RF Input Power	$P_{in,Max}$	10	dBm
Channel Temperature	T_{ch}	150	°C
Storage Temperature	T_{STG}	-65 ~ 150	°C
Maximum Operating Temperature	$T_{O,MAX}$	-55 ~ 100	°C

Electrical Specifications: (at room temperature)

Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
Gain	S_{21}	1.2 ~ 1.6 GHz	30.5	31	33.5	dB
Gain Variation	ΔG	1.2 ~ 1.6 GHz		+/- 1.0	+/- 1.3	dB
Input VSWR	$VSWR_1$	1.2 ~ 1.6 GHz		1.22	1.35	
Output VSWR	$VSWR_2$	1.2 ~ 1.6 GHz		1.22	1.35	
Reverse Isolation	S_{12}	1.2 ~ 1.6 GHz	35	37		dB
Noise Figure	NF	1.2 ~ 1.6 GHz		0.50	0.65	dB
Output Power @ 1dB Gain Comp. Point	P_{1dB}	1.2 ~ 1.6 GHz	9	10		dBm
Output IP3	OIP3	2-Tone, Pout 0 dBm each, 1 MHz separation		22		dBm
Current Consumption	I_{dd}	$V_{dd} = +3.3$ V	35	40	45	mA
Power Supply Voltage	V_{dd}		+3.0 ⁴	+3.3	+3.7	V
Operating Temperature	T_o		-40		+85	°C
Maximum Average RF Input Power	$P_{IN, MAX}$	1.2 ~ 1.6 GHz			10	dBm

¹ Specifications are subject to change without notice.

² MTBF: Mean Time Between Failure, Per TR-NWT-000332, ISSUE 3, SEPTEMBER, 1990, T=40 °C

³ Operation of this device above any one of these parameters may cause permanent damage.

⁴ The lower DC supply voltage reduces the LNA performance.

Available exclusively from Richardson RFPD - 800-737-6937 (U.S. & Canada) - 630-208-2700 (International)

Or visit www.richardsonrfpd.com. See important product notice on last page of this document.

Internal Richardson Document #	Origination Date: November 2004	Rev: V3 Date: April 2011	Page 1/4
--------------------------------	------------------------------------	-----------------------------	----------

Frequency Response

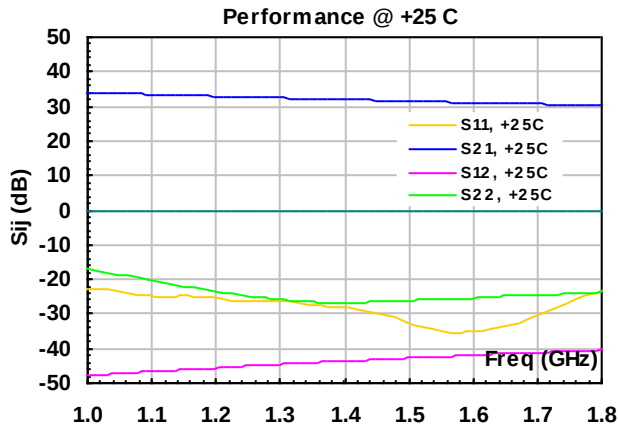


FIG. 1 Small signal performance.

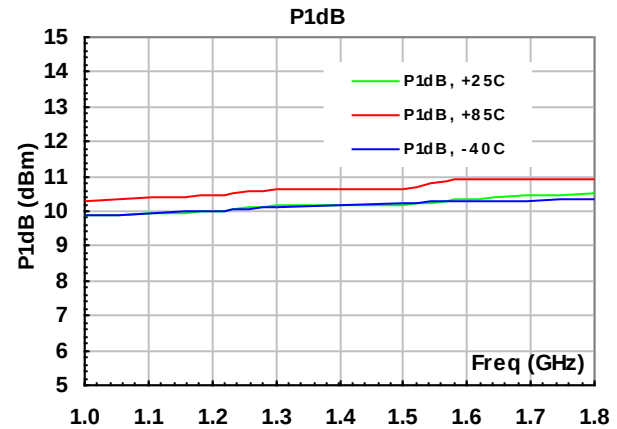


FIG. 2 P_{1dB} Performance at full temperature.

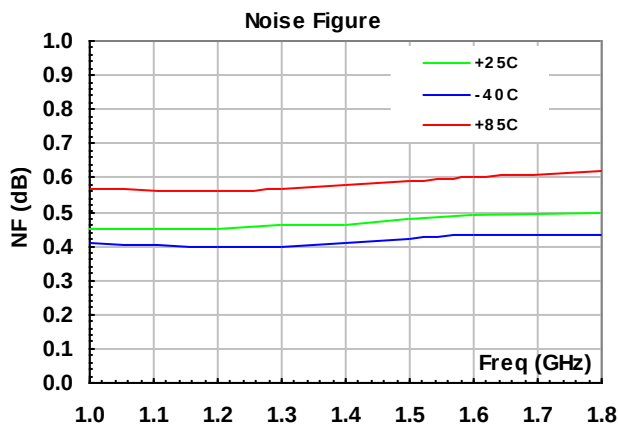


FIG. 3 Noise figure performance at full temperature

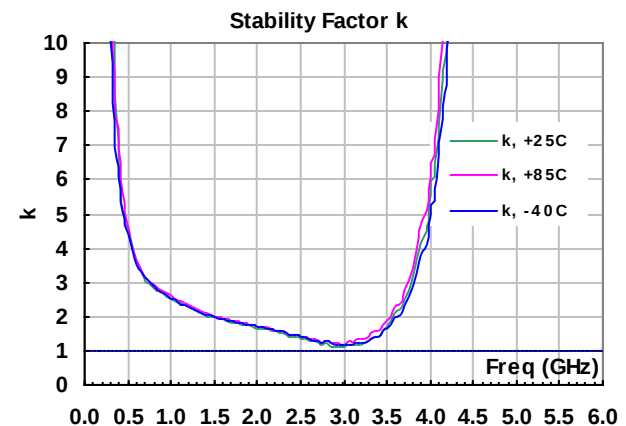


FIG. 4 Stability factor k

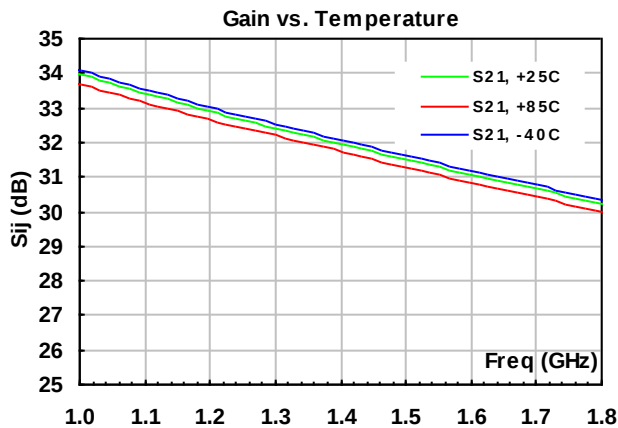


FIG. 5 Gain vs. temperature

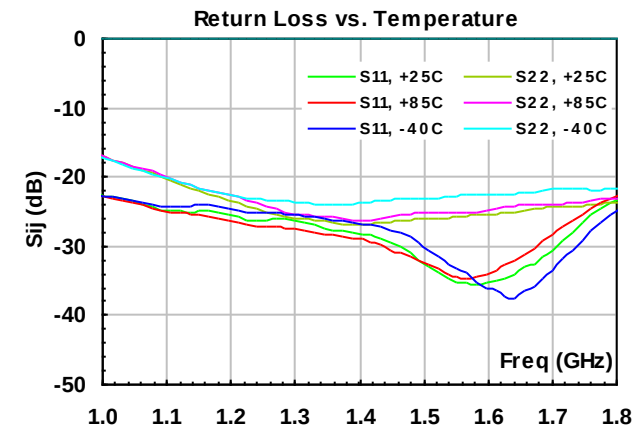


FIG. 6 Return Loss vs. Temperature

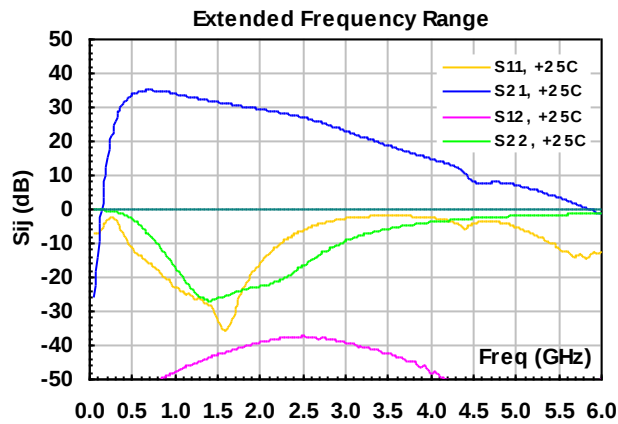


FIG. 7 Frequency response in extended frequency

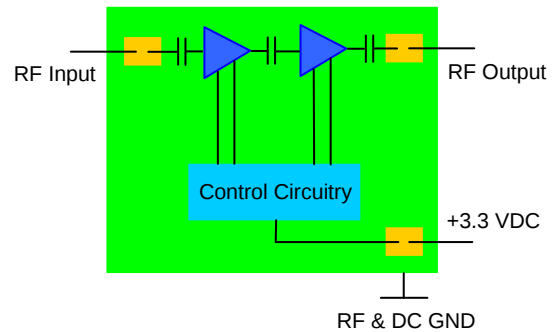


FIG. 8 Block diagram

Mechanical Outline: (2:1 ratio)

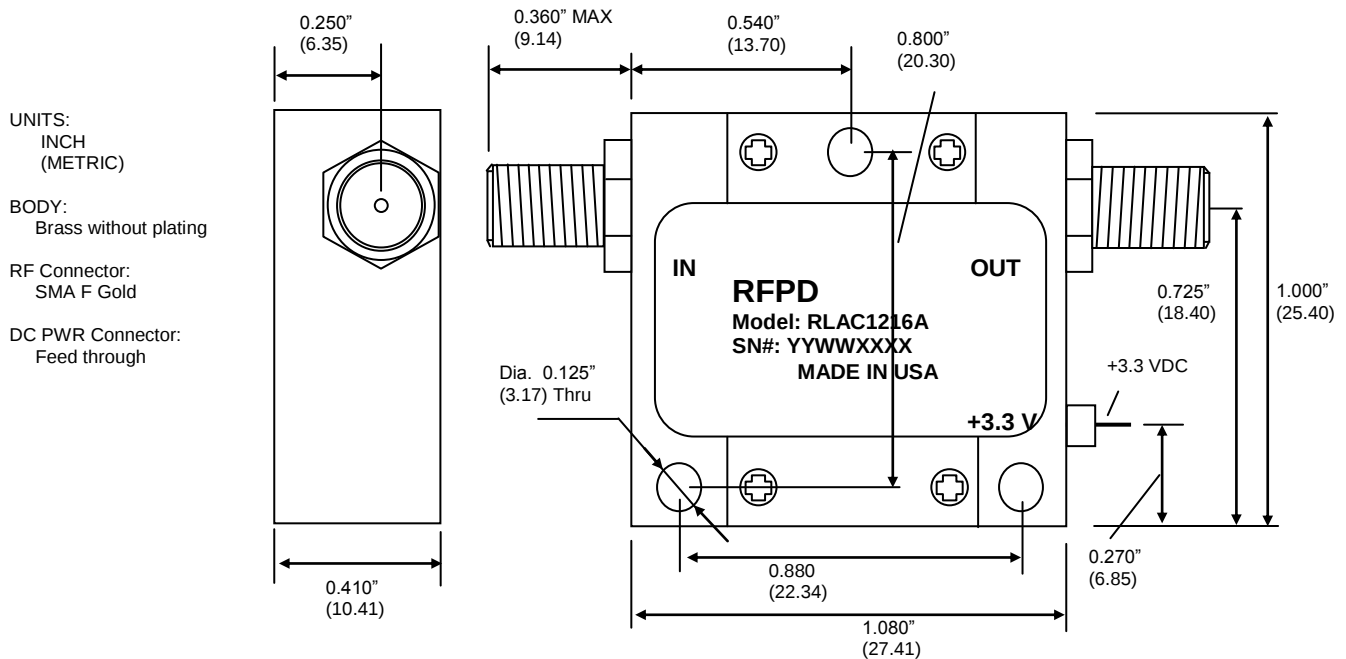


FIG. 9 Outline of standard package.

Ordering Information

Part Number	Description
RLAC1216A	Lead-Tin
RLAC1216A-G	RoHS

Available exclusively from Richardson RFPD - 800-737-6937 (U.S. & Canada) - 630-208-2700 (International)
Or visit www.richardsonrfpd.com. See important product notice on last page of this document.

Richardson RFPD, Inc.

40W267 Keslinger Road

P.O. Box 307

LaFox, IL 60147

Telephone: (800) 737-6937

(630) 208-2700

Fax: (630) 208-2662

Internet: www.richardsonrfpd.com**IMPORTANT NOTICE**

RICHARDSON RFPD, INC. AND ITS AFFILIATES RESERVE THE RIGHT TO MAKE CHANGES TO THE PRODUCT(S) OR INFORMATION CONTAINED HEREIN WITHOUT NOTICE. RICHARDSON RFPD, INC. ASSUMES NO RESPONSIBILITY FOR ANY ERRORS WHICH MAY APPEAR IN THIS DOCUMENT.

WARRANTY INFORMATION APPLICABLE TO THE PRODUCT IDENTIFIED HEREIN IS AVAILABLE UPON REQUEST. NOTHING CONTAINED HEREIN SHALL CONSTITUTE A WARRANTY, REPRESENTATION OR GUARANTEE OF ANY KIND. RICHARDSON RFPD, INC. EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND/OR IMPLIED INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, AND OF FITNESS FOR A PARTICULAR PURPOSE, USE OR APPLICATION.

NO PART OF THIS DOCUMENT MAY BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT THE PRIOR WRITTEN CONSENT OF RICHARDSON RFPD, INC.

WARNING

RICHARDSON RFPD, INC. PRODUCTS ARE NOT INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS. USE OF A RICHARDSON RFPD, INC. PRODUCT IN ANY SUCH APPLICATION WITHOUT WRITTEN CONSENT IS PROHIBITED.

Available exclusively from Richardson RFPD - 800-737-6937 (U.S. & Canada) - 630-208-2700 (International)

Or visit www.richardsonrfpd.com. See important product notice on last page of this document.

Internal Richardson Document #	Origination Date: November 2004	Rev: V3 Date: April 2011	Page 4/4
--------------------------------	------------------------------------	-----------------------------	----------