

1700 ~ 2200 MHz Super Low Noise Amplifier¹

RLAC1722A is an ultra low noise figure, wideband, and unconditionally stable SMT packaged amplifier with exceptionally low input and output VSWR. The amplifier offers a typical 0.55 dB noise figure, 20 dB input and output return losses, 30.0 dB gain, 19 dBm output P_{1dB} and 32 dBm OIP3 over the DCS, PCS, UMTS and 3G frequency bands from 1700 MHz to 2200 MHz. It is most suitable for receivers, wireless data communications, and other measurement applications.

Photo Not Available

RLAC1722A is designed to meet the rugged standards of MIL-STD-202 and MIL-STD-883.

Lead-Tin and **RoHS** compliant versions are both available.

A surface mount package version is also available, RLAS1722A.

Key Features:

Wide frequency range: 1700 ~ 2200 MHz
 Ultra low noise: 0.55 dB
 High OIP3: 32.0 dBm
 Very low VSWR: 1.22:1
 Impedance: 50 Ohm
 Unconditional stable: $k > 1$
 Single DC Supply: 90 mA @ +5.0V
 MTBF²: >600,000 hrs (68 Years)
 Small Size: 1.00"x1.08"x0.41" (27.4x25.4x10.4mm)
 Built-In Functions: DC blocks at input and output ports, temperature compensation circuitry

Absolute Maximum Ratings³:

Parameters	Symbol	Value	Units
DC Power Supply Voltage	V_{dd}	7	V
Drain Current	I_{dd}	120	mA
Total Power Dissipation	P_{diss}	840	mW
RF Input Power	$P_{In,Max}$	10	dBm
Channel Temperature	T_{ch}	150	°C
Storage Temperature	T_{STG}	-65 ~ 150	°C
Maximum Operating Temperature	$T_{O,MAX}$	-55 ~ 100	°C

Electrical Specifications: (at room temperature)

Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
Gain	S_{21}	1.7 ~ 2.2 GHz	28.5	30	32.5	dB
Gain Variation	ΔG	1.7 ~ 2.2 GHz		+/- 1.0	+/- 1.3	dB
Input VSWR	$VSWR_1$	1.7 ~ 2.2 GHz		1.17	1.25	
Output VSWR	$VSWR_2$	1.7 ~ 2.2 GHz		1.17	1.25	
Reverse Isolation	S_{12}	1.7 ~ 2.2 GHz	38	43		dB
Noise Figure	NF	1.7 ~ 2.2 GHz		0.55	0.75	dB
Output Power @ 1dB Gain Comp. Point	P_{1dB}	1.7 ~ 2.2 GHz	17	19		dBm
Output IP3	OIP3	2-Tone, Pout 0 dBm each, 1 MHz separation	30	32		dBm
Current Consumption	I_{dd}	$V_{dd} = +5.0$ V	85	90	95	mA
Power Supply Voltage	V_{dd}		+4.7 ⁴	+5.0	+5.3	V
Operating Temperature	T_o		-40		+85	°C
Maximum Average RF Input Power	$P_{IN, MAX}$	1.7 ~ 2.2 GHz			10	dBm

¹ Specifications are subject to change without notice.

² MTBF: Mean Time Between Failure, Per TR-NWT-000332, ISSUE 3, SEPTEMBER, 1990, T=40 °C

³ Operation of this device above any one of these parameters may cause permanent damage.

⁴ The lower DC supply voltage reduces the LNA performance.

Available exclusively from Richardson RFPD - 800-737-6937 (U.S. & Canada) - 630-208-2700 (International)

Or visit www.richardsonrfpd.com. See important product notice on last page of this document.

Frequency Response

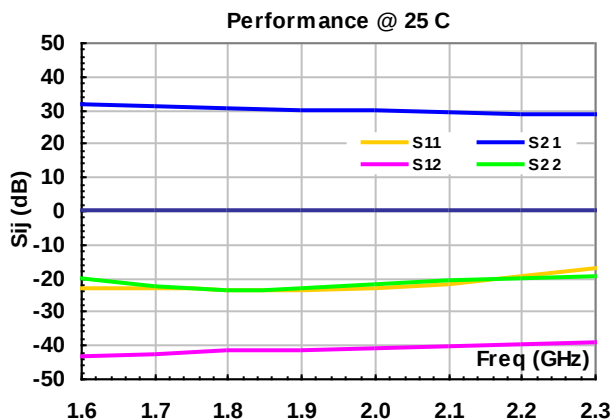


FIG. 1 Small signal performance.

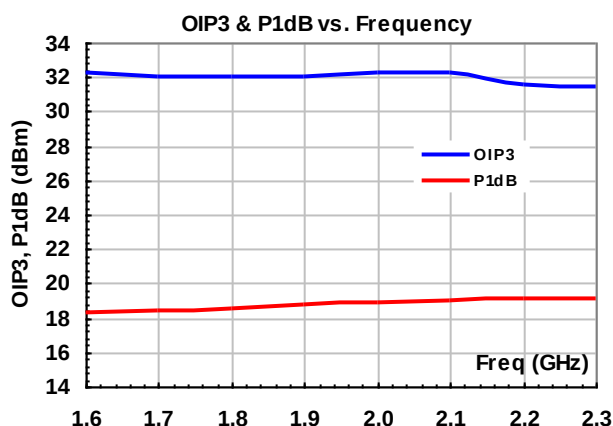


FIG. 2 P_{1dB} and OIP3 at room temperature.

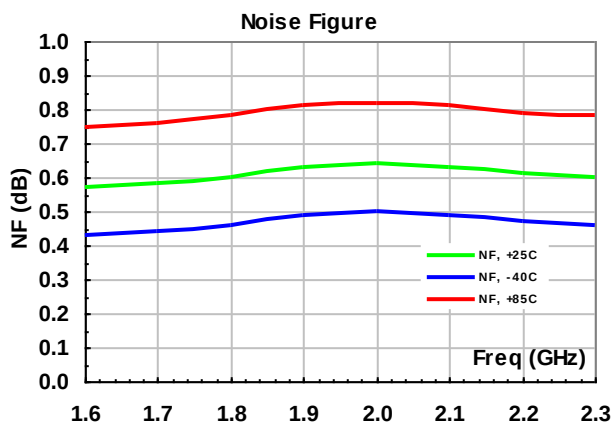


FIG. 3 Noise figure performance at full temperature

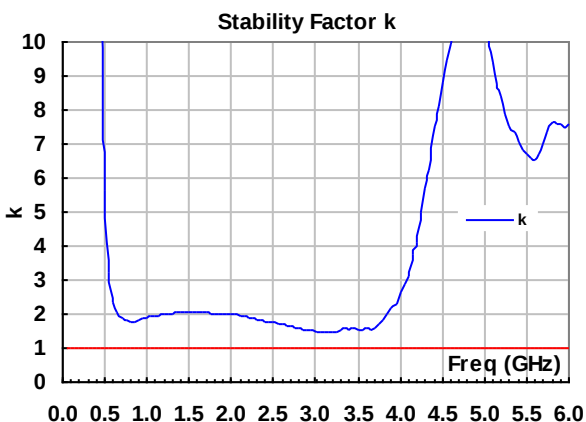


FIG. 4 Stability factor k

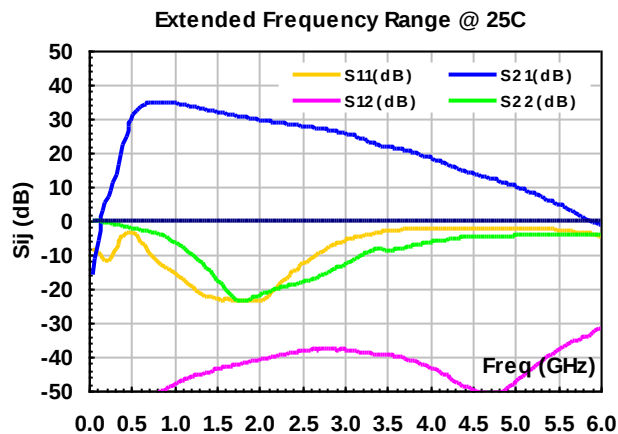


FIG. 5 Frequency response over extended frequency

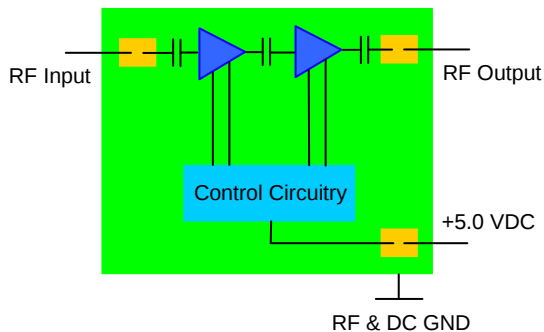


FIG. 6 Block diagram

Mechanical Outline: (2:1 ratio)

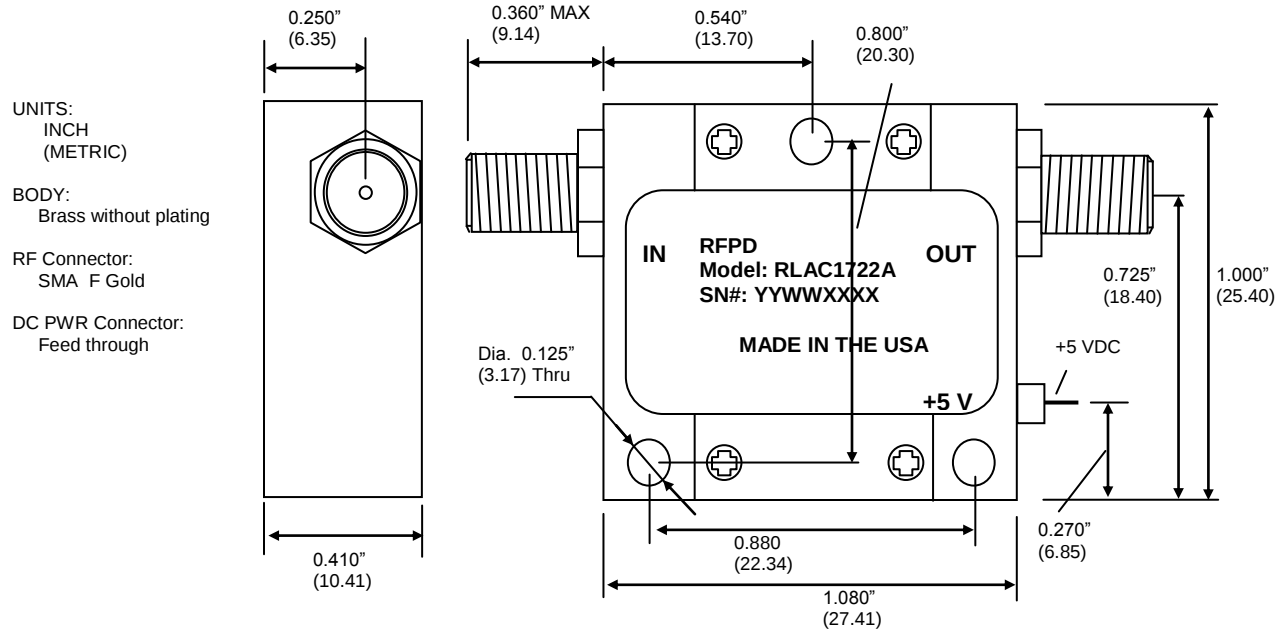


FIG. 7 Outline of standard package.

Ordering Information

Model Number	Description
RLAC1722A	Lead-Tin
RLAC1722A-G	RoHS

Ordering Information

Part Number	RLAC1722A
--------------------	------------------

Richardson RFPD, Inc.
40W267 Keslinger Road
P.O. Box 307
LaFox, IL 60147
Telephone: (800) 737-6937
(630) 208-2700
Fax: (630) 208-2662
Internet: www.richardsonrfpd.com

IMPORTANT NOTICE

RICHARDSON RFPD, INC. AND ITS AFFILIATES RESERVE THE RIGHT TO MAKE CHANGES TO THE PRODUCT(S) OR INFORMATION CONTAINED HEREIN WITHOUT NOTICE. RICHARDSON RFPD, INC. ASSUMES NO RESPONSIBILITY FOR ANY ERRORS WHICH MAY APPEAR IN THIS DOCUMENT.

WARRANTY INFORMATION APPLICABLE TO THE PRODUCT IDENTIFIED HEREIN IS AVAILABLE UPON REQUEST. NOTHING CONTAINED HEREIN SHALL CONSTITUTE A WARRANTY, REPRESENTATION OR GUARANTEE OF ANY KIND. RICHARDSON RFPD, INC. EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND/OR IMPLIED INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, AND OF FITNESS FOR A PARTICULAR PURPOSE, USE OR APPLICATION.

NO PART OF THIS DOCUMENT MAY BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT THE PRIOR WRITTEN CONSENT OF RICHARDSON RFPD, INC.

WARNING

RICHARDSON RFPD, INC. PRODUCTS ARE NOT INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS. USE OF A RICHARDSON RFPD, INC. PRODUCT IN ANY SUCH APPLICATION WITHOUT WRITTEN CONSENT IS PROHIBITED.

Available exclusively from Richardson RFPD - 800-737-6937 (U.S. & Canada) - 630-208-2700 (International)
Or visit www.richardsonrfpd.com. **See important product notice on last page of this document.**

Internal Richardson Document #	Origination Date: <Month Year>	Rev: <1P> Date: <Month Year>	Page 4/5
--------------------------------	-----------------------------------	---------------------------------	----------