


PART NO.				RP-3402			
REV	DESCRIPTION	DWN	DATE	APPROVED			
-	ENGINEERING RELEASE	JDM	5/19/11	JDM			
A	UPDATED DRAWING & TITLE BLOCK	CZS	05/26/11	JDMc			

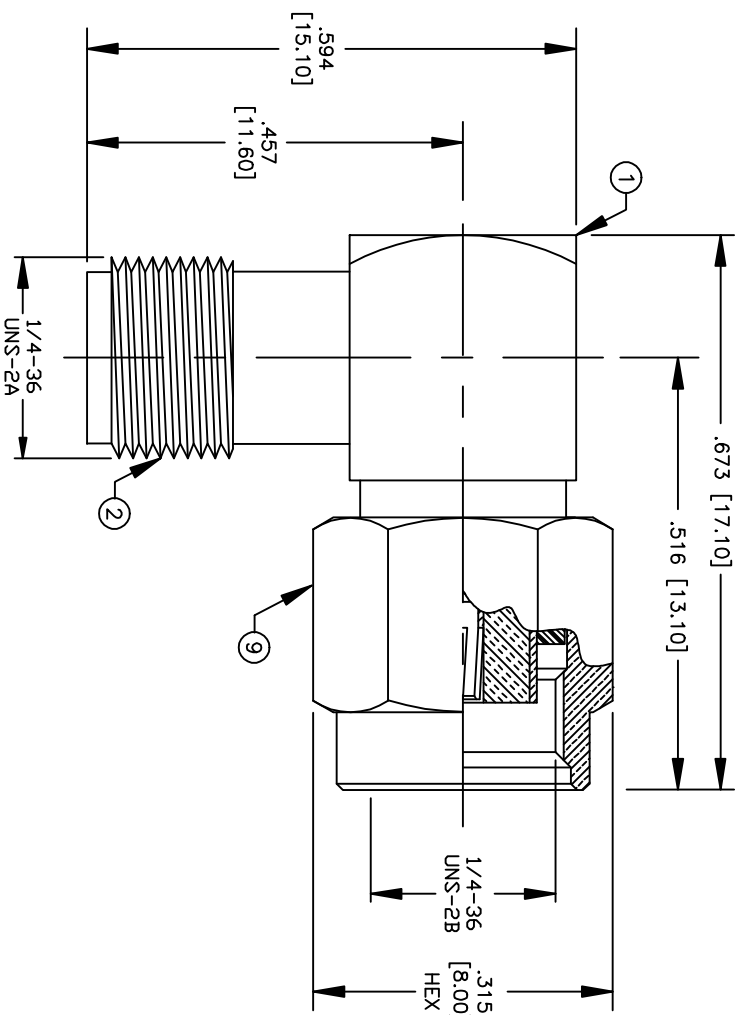

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 335 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-12.4 GHz

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
10	END CAP	1	BRASS	NICKEL
9	SHELL	1	BRASS	NICKEL
8	RETAINING RING	1	BeCu	NONE
7	GASKET	1	S.I. RUBBER	RED
6	DIELECTRIC	1	TEFLON	NONE
5	DIELECTRIC	1	TEFLON	NONE
4	CONTACT	1	BeCu	GOLD
3	PIN	1	BRASS	GOLD
2	FEMALE BODY	1	BRASS	NICKEL
1	MALE BODY	1	BRASS	NICKEL

CUSTOMER
OUTLINE DRAWING

ALL DIMENSIONS
ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN
C. ZUNIGA

CHECKED

ORU DRAWN
JDM

5/19/11

ROHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES, ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RF INDUSTRIES

DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(658) 549-6340
(658) 549-6345 FAX

**SMA JACK TO SMA REVERSE
POLARITY PLUG R/A ADAPTER**

SIZE: **A** CABLE GROUP: **N/A** DWG NO.: **RP-3402** REV: **A**

SCALE: **NTS** ENGINEERING ID: **000000** SHEET **1** OF **1**