


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.


RSA-3570-1-047

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	9/25/06	JDMc

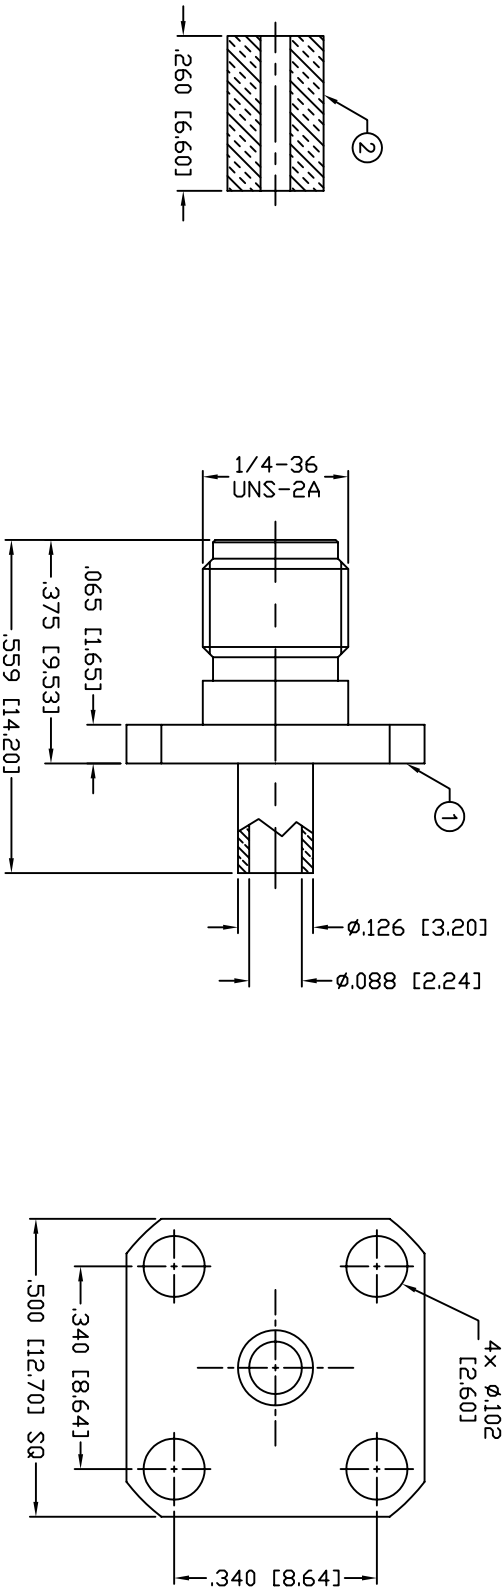

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-18 GHz
INSERTION LOSS(dB): 1.07 + .01 x $f^{.7}(\text{GHz})$
INSULATION RESISTANCE: 5k M Ohms min.
TEMPERATURE RANGE: -65°C TO 165°C
FOR .047 SEMI RIGID, M17/151

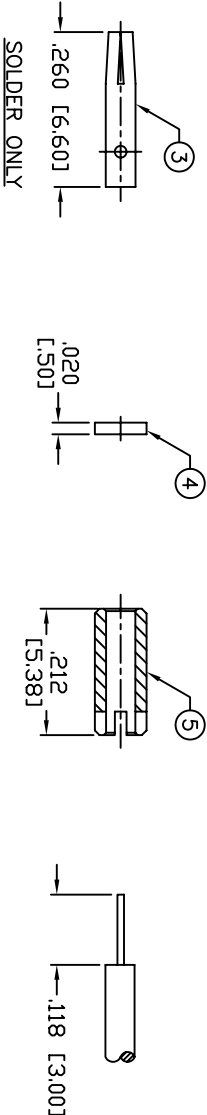

1	BODY	1	BRASS	GOLD, 3μ"	000641	UNLESS OTHERWISE SPECIFIED:	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE: DECIMALS DIAMETER			
2	INSULATOR	1	PTFE	---						
3	CONTACT	1	Be.Cu.	GOLD, 30μ"						
4	INSULATOR	1	PTFE	---						
5	SOLDER INSERT	1	BRASS	GOLD, 3μ"						
6										
7										
8										
9										
10										
11										
12										
13										
14										
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE				

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

RF connectors
DIVISION OF RF INDUSTRIES, LTD.

SMA JACK
FOUR HOLE FLANGE, SOLDER

SIZE: A
CABLE GROUP: SRO
DWG NO.: RSA-3570-1-047
SCALE: NTS
CAD FILE: OUTLINE
SHEET: 1 OF 1

REV: —