


## PROTECTIVE CAP

**240.92.---**

Series : ACC-COAX

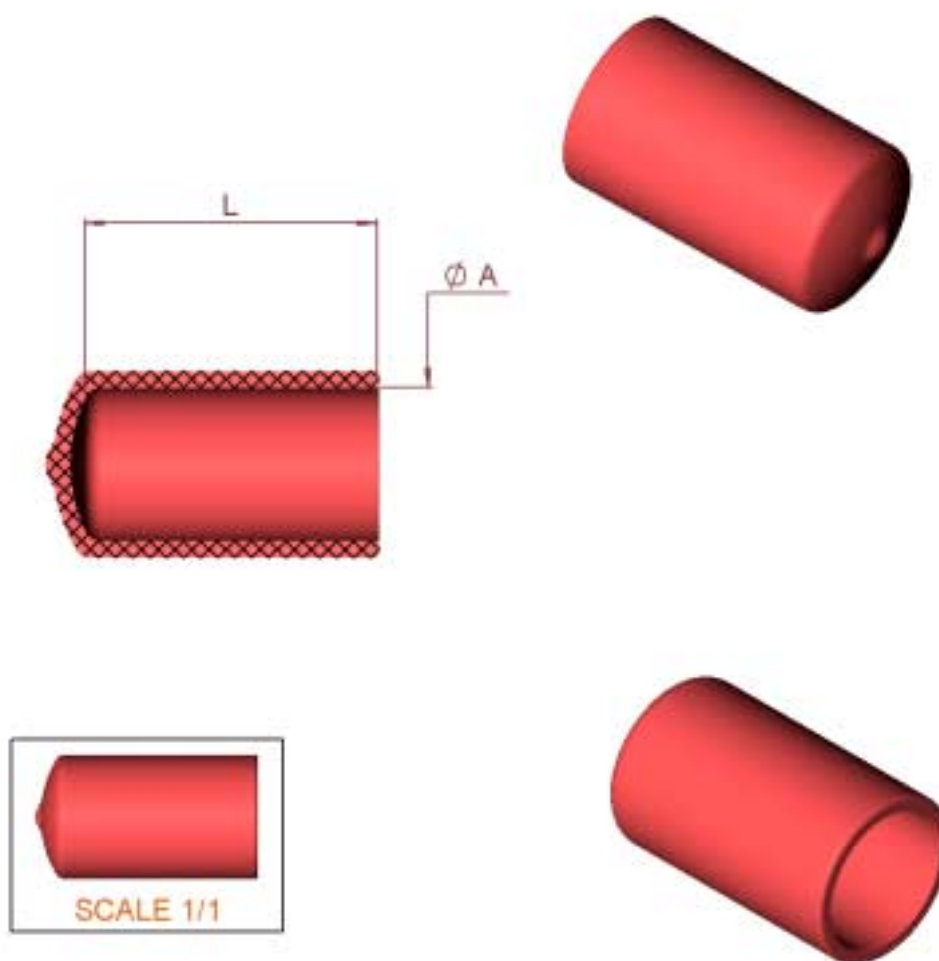

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	-	-
CENTER CONTACT	-	-
OUTER CONTACT	-	-
INSULATOR	-	-
GASKET	-	-
OTHERS PARTS	RED VINYL EXTRA FLEXIBLE	-

Operating temperature : °C

Weight : 0,0000 g

Others characteristics :

Issue : 0633 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



## PROTECTIVE CAP

-

**240.92.---**

Series : ACC-COAX

<b>Ø A</b>	<b>L</b>	<b>Références</b>	<b>Utilisations</b>
<b>4</b>	<b>11,1</b>	<b>240.92.681</b>	<b>SSMA Female QMA Female SMC Male plug 10/23 Female BMA Male MCX Female</b>
<b>6</b>	<b>11,1</b>	<b>240.92.682</b>	<b>SSMA Male SMB Female</b>
<b>6</b>	<b>19</b>	<b>240.92.671</b>	<b>SMA Female SMC Female jack BMA Female</b>
<b>8,7</b>	<b>19</b>	<b>240.92.672</b>	<b>SMA Male</b>
<b>9</b>	<b>19</b>	<b>240.92.684</b>	<b>QMA Male QN Female</b>
<b>10,3</b>	<b>22,2</b>	<b>240.92.673</b>	<b>TNC Female BNC Female BNC HT Female</b>
<b>13,5</b>	<b>25,4</b>	<b>240.92.674</b>	<b>TNC Male C Female</b>
<b>14,3</b>	<b>22,2</b>	<b>240.92.675</b>	<b>BNC Male BNC HT Male TNC 18 M</b>
<b>15,9</b>	<b>25,4</b>	<b>240.92.676</b>	<b>N Female</b>
<b>17,4</b>	<b>25,4</b>	<b>240.92.677</b>	<b>C Male QN Male</b>
<b>19</b>	<b>25,4</b>	<b>240.92.678</b>	<b>N Male HN Female</b>
<b>19,5</b>	<b>14</b>	<b>240.92.090</b>	<b>HN Female</b>
<b>20,63</b>	<b>12,7</b>	<b>A240.92.010</b>	<b>7/16 Male</b>
<b>29</b>	<b>10,5</b>	<b>241.92.040</b>	<b>7/16 Female</b>

Issue : 0633

A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

