

SUCOFLEX® 526S Microwave Cable Assembly

Description

SUCOFLEX 526S microwave cable assemblies set a new measurement standard through 26.5 GHz.

- Excellent return- and insertion loss
- Phase and amplitude stability with flexure and movement
- Torque, crush and kink resistance
- Precise and repeatable measurements
- Long service life
- Reduce total cost of test with durable, reliable performance

Product Configuration

Description	SF526S/11PC35/11N/48in
Item number	85093197
Cable type	SUCOFLEX 526S
Length of assembly	1'219 mm (48 inch)
Connector A	11_PC3.5 (straight male)
Connector B	11_N (straight male)

Technical Data

Mechanical Data

Outer diameter	7.7 mm
Min. bending radius	25.4 mm
Weight	230 g
Crush resistance	26 kgf /cm

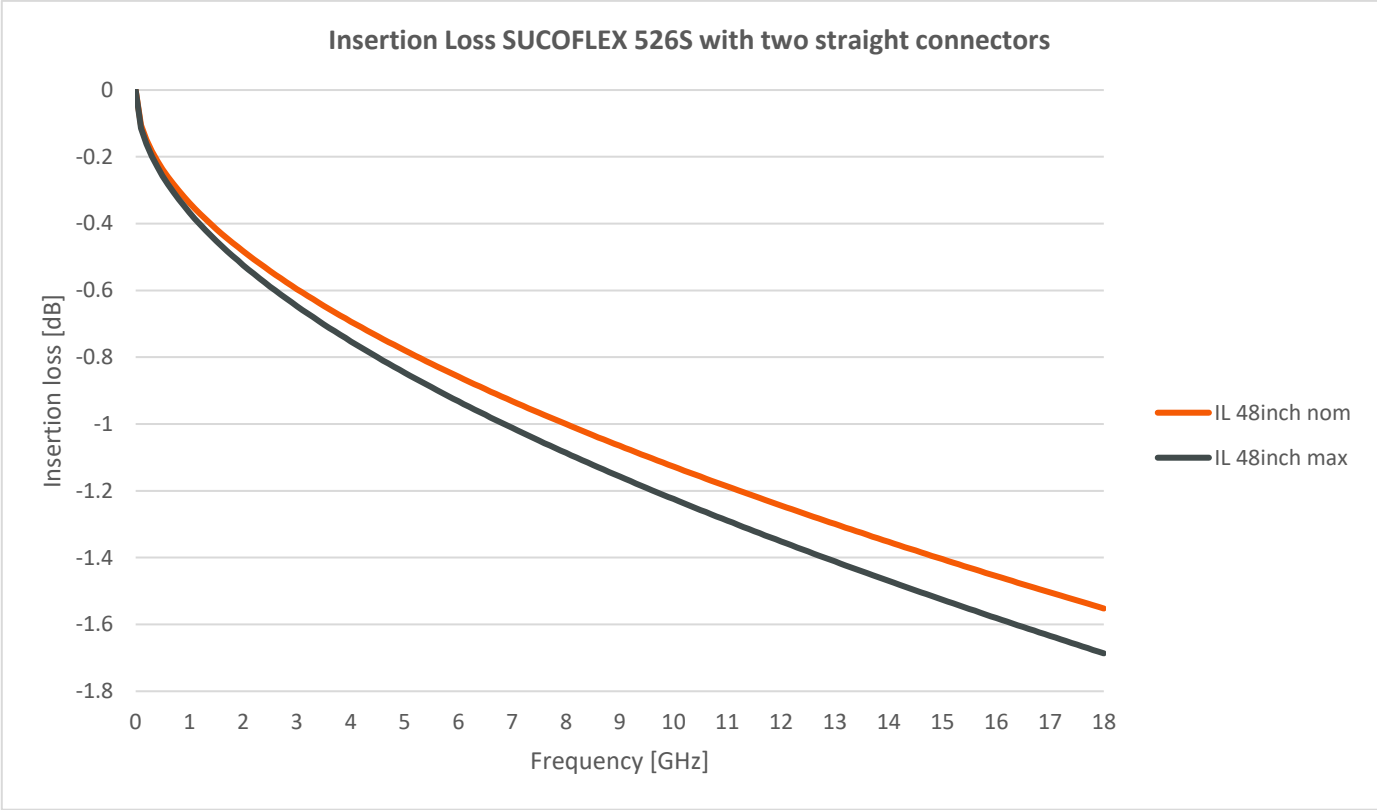
Environmental Data

Operating temperature	-55 ... + 75°C
RoHS, REACH	Compliant

Electrical Data

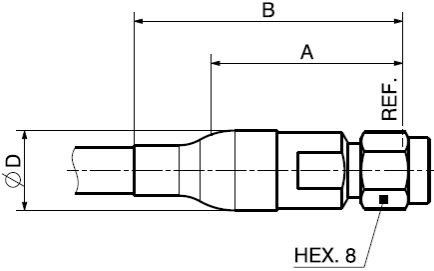
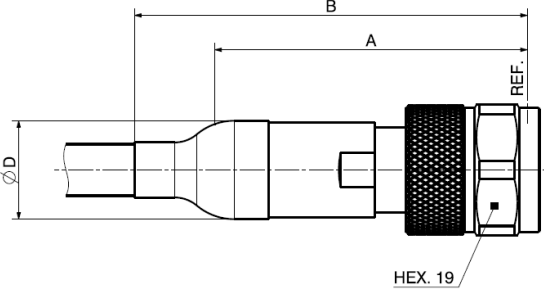
Impedance	50 Ω
Operating frequency	up to 18.0 GHz
Velocity of propagation	77 %
Time delay	4.3 ns / m
Typical return loss	-25.0 dB
Min. return loss	-19.0 dB
Typical insertion loss	1.56 dB
Max. insertion loss	1.69 dB
Screening effectiveness	> 90 dB
Typ. amplitude stability vs. shaking	± 0.05 dB
Typ. amplitude stability vs. bending	± 0.05 dB
Typ. phase stability vs. bending	$\pm 3.0^\circ$

SUCOFLEX® 526S
Microwave Cable Assembly



Connector 11_PC3.5 (straight male)

Connector 11_N (straight male)

					
Dimensions			Dimensions		
A	B	D	A	B	D
44 mm	N/A (only if shrinking sleeve is applied)	11.8 mm	76 mm	N/A (only if shrinking sleeve is applied)	15.6 mm