


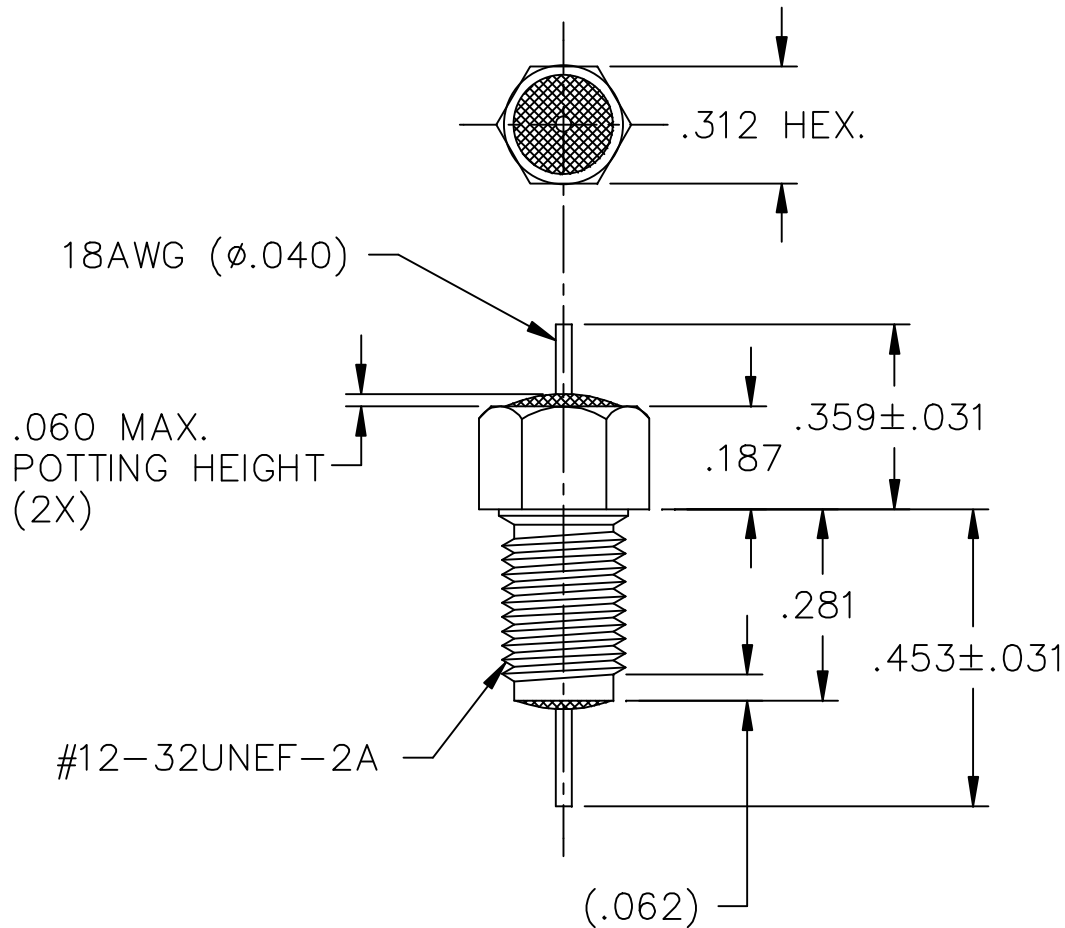

TERMINAL FINISH: SOLDER

BUSHING FINISH: SILVER


CAPACITANCE	1uF MIN.
TEMP. RANGE	-55°C TO +125°C
CURRENT	15 AMPS
WORKING VOLTAGE	85°C 50 VDC 125°C 35 VDC

DC RESISTANCE	.01 OHMS MAX.
---------------	---------------

IL=PER MIL-STD-220, @25°C N/L

FREQ. MHz	I.L. (db)
1	38
10	52
100	70
1 GHz	78

SCHEMATIC



MARKING:

PART: S381-6004

BAG:

SCI 9910-381-6004

DATE CODE

LOT NO.

QTY./BAG (50 MAX.)

0

CN 175210

REV. NO.

CHANGE NOTICE

TOLERANCES UNLESS OTHERWISE SPECIFIED


Fractions ± 1/64

Dec. .xx±

Dec. .xxx± .010

Angles ±0° 30'

CODE IDENT. NO.
DLSP2



SPECTRUM CONTROL INC.

Dwn. KAUFFMAN

Ckd. 8-12-96

Apvd.

Scale NONE

ERIE, FAIRVIEW
PENNSYLVANIA

Description

F/T FILTER

9910-381-6004

