



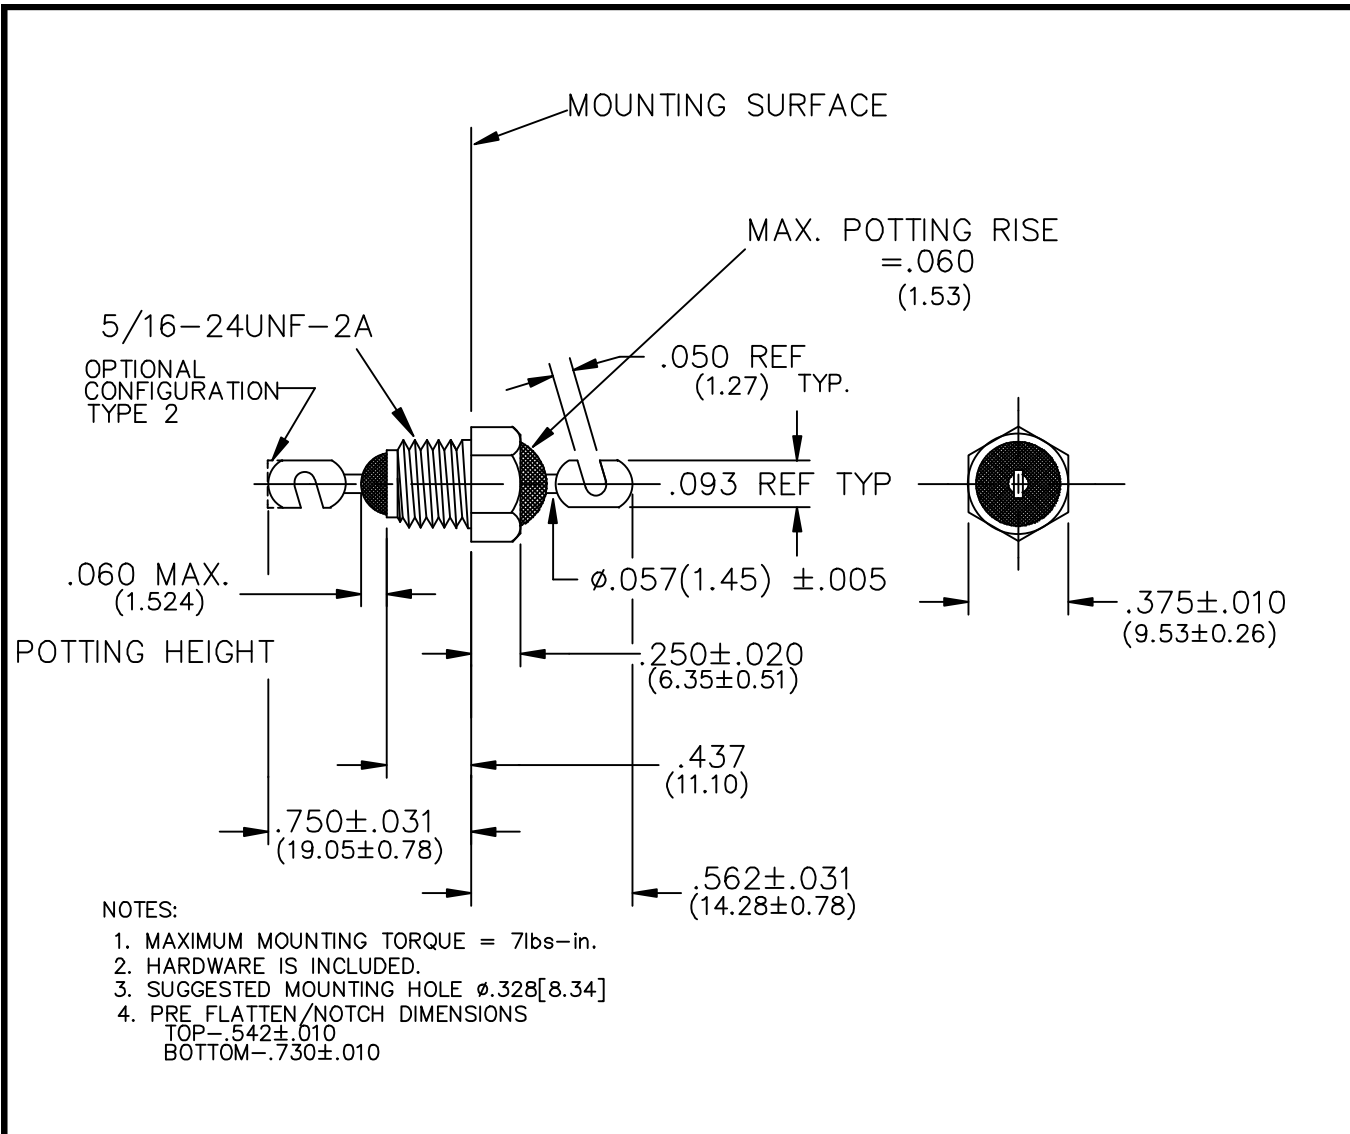

LEAD FINISH: SOLDER	
BUSHING FINISH: SILVER	
CAPACITANCE	0.1uF +100%,-0%
TEMP. RANGE	-55°C TO +125°C
CURRENT	25 AMP MAX.
WORKING VOLTAGE	85°C 100 VDC 125°C 100 VDC
D.C. RESISTANCE	.01 Ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
3MHz	12dB
10MHz	22dB
30MHz	30dB
100MHz	38dB
300MHz	45dB
1GHz	50dB
SCHEMATIC 	
MARKING: PART: S9510104 BAG: SCI-9510-104 DATE CODE LOT NO. QTY./BAG (50 MAX.)	

					4	3	2	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC. ERIE, FAIRVIEW PENNSYLVANIA		
					CN 22030-CPD REDRAWN	CN 203111 REDRAWN	CN 174701	CHANGE NOTICE	Fractions ± 1/64		Dwn. KRDZALIC	Description FEED THRU RESIN SEAL FILTER
									Dec. .xx		Ckd. 9/5/01	
									Dec. .xxx± .010			
									Angles ±0° 30'			
									CODE IDENT. NO. DLSP2		Scale NONE	SCI-9510-104

