

DATASHEET

SMA(F) to SMA(F) Bulk Head Adapter

Product Name

1. SMAFBH-SMAF-002





SMA(F) to SMA(F) Bulk Head Adapter

Document No.	CRD-DS-2251-07
Date / Rev.	25.May.2023 / 1
Confidential level	N/A

1. Product

1-1. SMA(F) to SMA(F) Bulk Head Adapter

(P/N : SMAFBH-SMAF-002)

2. Specifications

2-1. Material

Body : Brass, Au plated

Center Conductor : BeCu, Au Plated

Insulator : PTFE

2-2. Environmental

Operating Temperature : -50°C to 150°C

2-3. Electrical

Impedance : 50Ω Typ.


Operating Freq. : DC to 26.5GHz

VSWR : 1.15 : 1 @26.5GHz Typ.

1.20 : 1 @26.5GHz Max.

Insertion Loss : -0.06dB x $\sqrt{f}$

RF Leakage : -100dB




Document No.	CRD-DS-2251-07
Date / Rev.	25.May.2023 / 1
Confidential level	N/A

3. Drawing

3-1. SMA(F) to SMA(F) Bulk Head Adapter

(P/N : SMAFBH-SMAF-002)

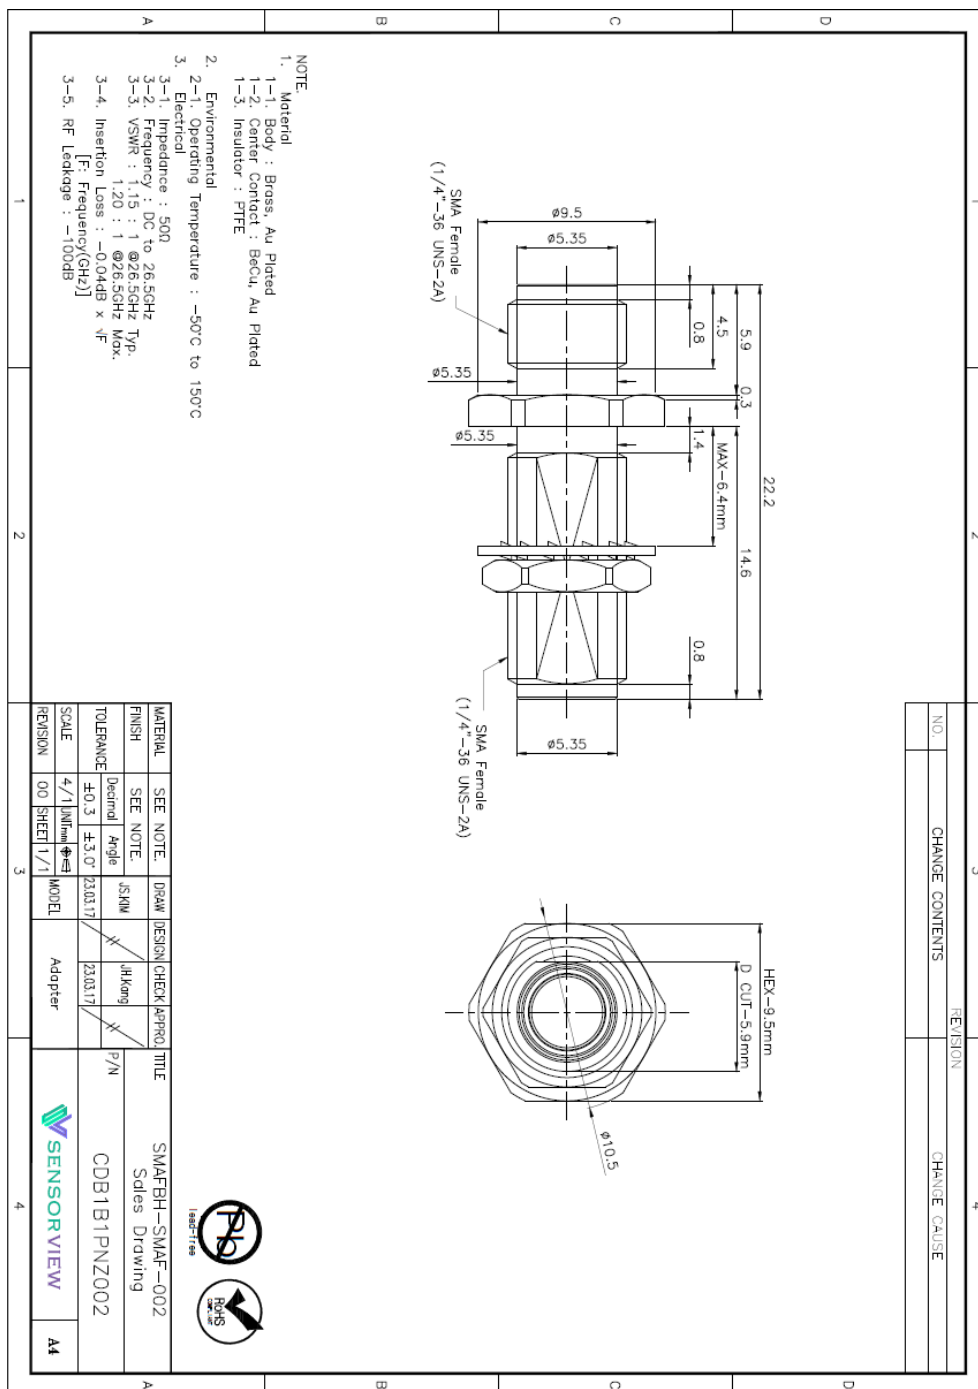



SMA(F) to SMA(F) Bulk Head Adapter

Document No.	CRD-DS-2251-07
Date / Rev.	25.May.2023 / 1
Confidential level	N/A

4. Data

4-1. SMA(F) to SMA(F) Bulk Head Adapter

(P/N : SMAFBH-SMAF-002)

