


Adapter_Sensorview N/Female to SMA/Male Adapter 18GHz

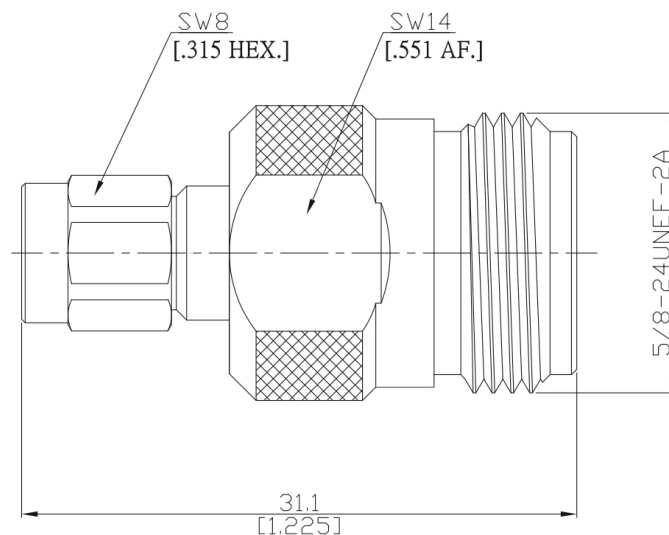

All dimensions are in mm [inch]

Interface

According to MIL-STD-348A

Electrical Data

Impedance 50 Ω

Frequency DC to 18 GHz

VSWR (Return Loss) ≤ 1.15

Mechanical Data

Coupling mechanisms Screw-lock

Environmental Data

Temperature range -65°C to +165°C

RoHS compliant

Environmental Data

| Piece Parts (N) | Material | Plating |
|-------------------|-----------------|----------------------------------|
| Centre contact | Phosphor Bronze | Gold plating(Nickel underplated) |
| Body | Stainless Steel | Passivated |
| Insulator | PTFE | |
| Piece Parts (SMA) | Material | Plating |
| Centre contact | Phosphor Bronze | Gold plating(Nickel underplated) |
| Body | Stainless Steel | Passivated |
| Insulator | PTFE | |
| Coupling nut | Stainless Steel | Passivated |