


Adapter_Sensorview N/Male to SMA/Male Adapter 18GHz

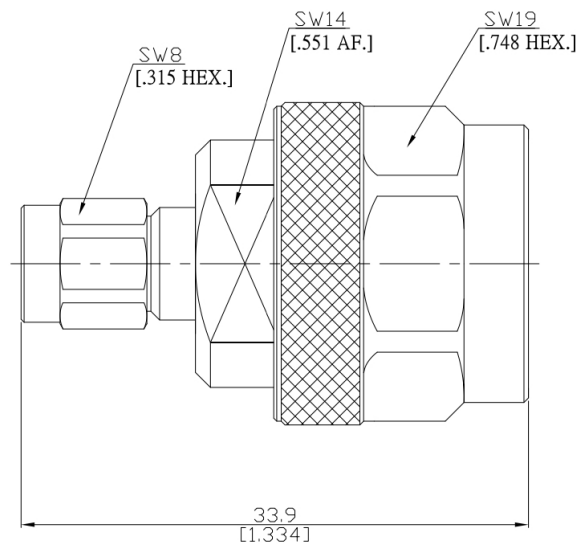

All dimensions are in mm [inch]

Interface

According to MIL-STD-348A

Electrical Data

Impedance 50 Ω

Frequency DC to 18 GHz

VSWR (Return Loss) ≤ 1.2

Mechanical Data

Coupling mechanisms Screw-lock

Environmental Data

Temperature range -55°C to +165°C

RoHS compliant

Environmental Data

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Coupling nut	Stainless Steel	Passivated
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Coupling nut	Stainless Steel	Passivated