


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	09/01/11	AM

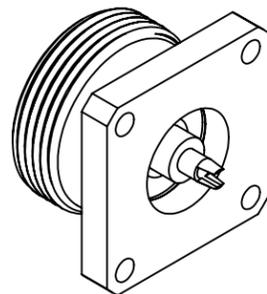

ENGINEERING DATA:

ELECTRICAL

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC to 7.5 GHz
 VOLTAGE RATING: 2,700 VOLTS RMS
 PIM: < -155 dBc

MECHANICAL

INTERFACE: PER IEC 169-4, DIN 47223

MATERIAL



INSULATOR: TEFLON
 FEMALE CONTACT: BERYLLIUM COPPER
 OUTER CONTACT: PHOSPHOR BRONZE
 OTHER METAL PARTS: BRASS

FINISH

CENTER CONTACT: SILVER PLATED
 OTHER METAL PARTS: TruLustre

NOTES:

- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.

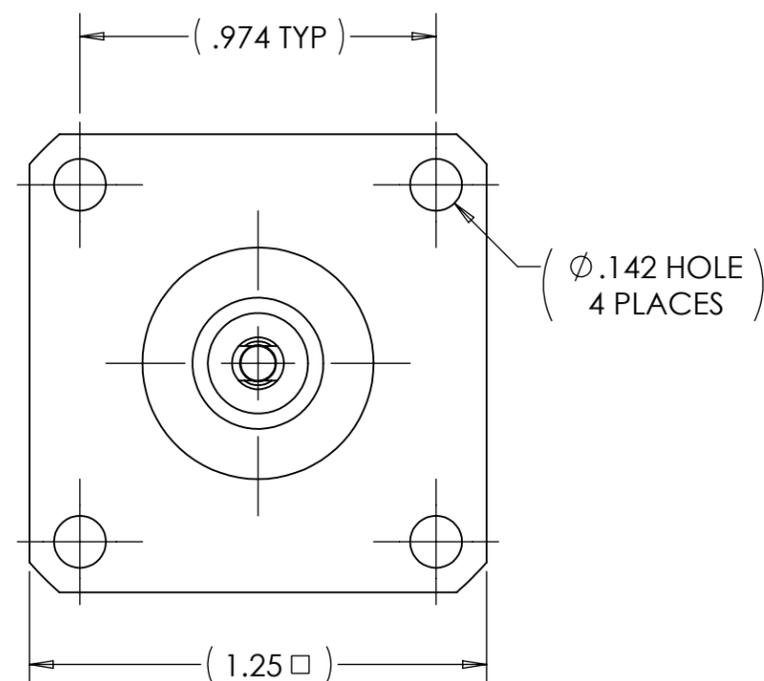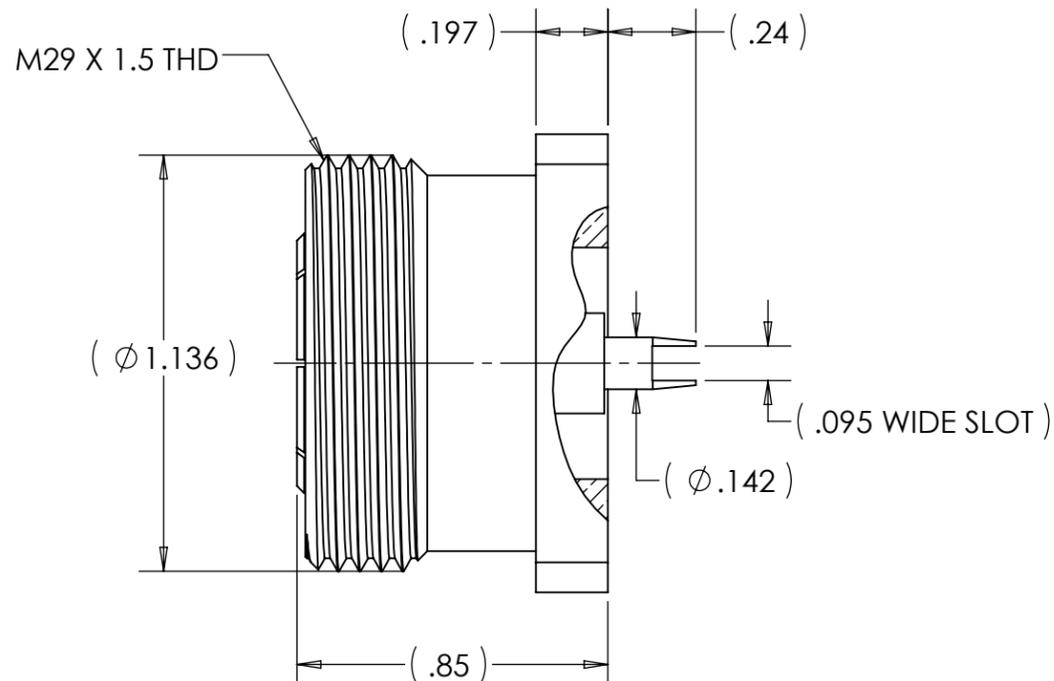

MATERIAL	DO NOT SCALE DRAWING	DRAWN MVC	DATE 08/08/11	TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 63/√	ENG APPR. AM	DATE 08/18/11	
COMMENTS:			MFG APPR.	DATE
	OTHER APPR.		DATE	
surface area: sq inch	weight: lbs	THIRD ANGLE PROJECTION		SIZE B
				DWG. NO. TRU-7002-0001-02
				REV -
				CAGE CODE: 92180
				SCALE: 2:1
				SHEET 1 OF 1