

AS398 ATTENUATORS

SMA, DC - 3 GHz, 1 Watt

SPECIFICATIONS:

MODELS: AS398-XXdB

RoHS
Compliant


AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 3.0 GHz
Standard dB Values _____ 1 - 10, 12, 15 & 20 dB
Attenuation Accuracy:
1-10, 12, 15 & 20 dB _____ ± 0.3 dB
30 dB _____ ± 0.5 dB
VSWR _____ 1.25:1 Max.
Input Power _____ 1 Watt Avg. @ 25°C
Impedance _____ 50 Ohms
Operating Temp Range _____ -40°C to +80°C

Mechanical:

SMA Connectors _____ Gold Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Dielectrics _____ PTFE

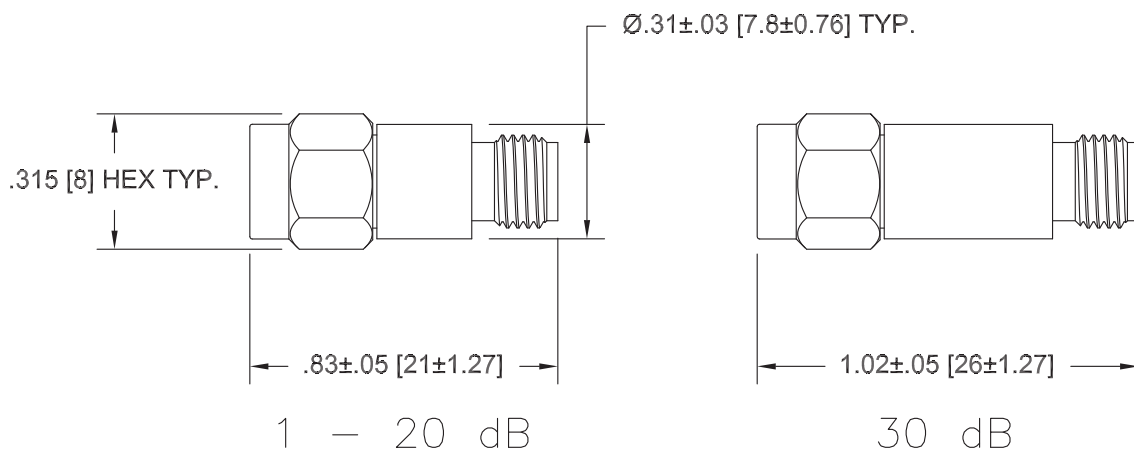

HOW TO ORDER:

Model Number: AS398-XX

dB Value

Ordering Examples:

Model Number: AS398-03
DC - 3 GHz; 3 dB; SMA - Male/Fem

Model Number: AS398-10
DC - 3 GHz; 10 dB; SMA - Male/Fem

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

AEROFLEX
INMET

AS398-ATT: REV E

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com