




FEATURES

Small Size - High Temperature – Low ESR – High Ripple Current
– Stable with Temperature – High Frequency

APPLICATIONS

Power Units – LED Lighting – Telecommunications

Operating Temperature Range		-55°C to +125°C							
Capacitance Tolerance		+20% at 120 Hz, 20°C							
Surge Voltage	WVDC	16	25	35	50	63	100	160	
	SVDC	1.15 x rated WVDC							
Dissipation Factor 120 Hz, 20°C		12% MAX							
Leakage Current		2 Minutes							
		See standard part listing							
Low Temperature Stability Impedance Ratio (120 Hz)	-25°C/ +20°C	≤1.15							
	-55°C/ +20°C	≤1.25							
Load Life		2000 hours(1500 Hours for WVDC≥35V) at 125°C with rated WVDC applied							
		Capacitance Change		≤30% of initial measured value					
		Dissipation Factor		≤300% of maximum specified value					
		ESR		≤300% of maximum specified value					
		Leakage Current		≤100% of maximum specified value					
Humidity test		1000 hours at 20°C with rated voltage applied at 90-95% R.H.							
		Capacitance Change		≤20% of initial measured value					
		Dissipation Factor		≤150% of maximum specified value					
		ESR		≤150% of maximum specified value					
		Leakage Current		≤100% of maximum specified value					
Surge Voltage test		1000 cycles at 125°C with rated surge voltage applied for 30 seconds through a 1kΩ resistor and discharged for 5 minutes and 30 seconds							
		Capacitance Change		≤20% of initial measured value					
		Dissipation Factor		≤150% of maximum specified value					
		ESR		≤150% of maximum specified value					
		Leakage Current		≤100% of maximum specified value					
Failure Rate		0.5% /1000 hours Maximum (60% confidence level at 125°C)							
Ripple Current Multipliers		Frequency (Hz)							
		120	1k	10k	100k-300K				
		.05	.3	.7	1.0				

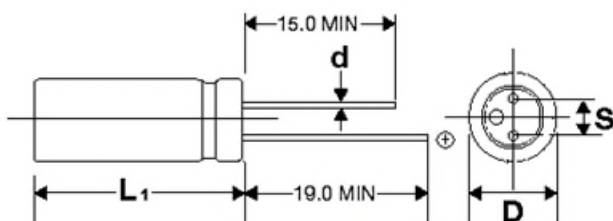

D+0.5	8	10
S+0.5	3.5	5.0
d	0.6	0.6

L₁=L+1.5mm MAX

Americas / EU

Phone: 1-508-996-8561

Email: cdena@cde.com



CORNELL
DUBILIER



Asia

Phone: 852-2793-0931

Email: cdeasia@cde.com

AVG

+125°C Highest capacitance & Voltage

WVDC	Capacitance (µF)	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum ESR (mΩ) 100 kHz, +20°C	Leakage Current (µA)	Maximum RMS Ripple Current (mA) 100 kHz, +105°C	Dims DxL (mm)
16	330	337AVG016MFF	0.60286	15	1056	4300	8x8
16	470	477AVG016MFF	0.42328	15	1504	4300	8x8
16	470	477AVG016MFB	0.42328	13	1504	4650	8x12
16	820	827AVG016MFB	0.24261	13	2624	4650	8x12
16	820	827AVG016MGB	0.24261	12	2624	5600	10x12
16	1000	108AVG016MGB	0.2	12	3200	5600	10x12
16	1200	128AVG016MGB	0.16579	12	3840	5600	10x12
16	1500	158AVG016MGB	0.132629	12	4800	5600	10x12
25	100	107AVG025MFF	1.9894	24	500	2900	8x8
25	150	157AVG025MFF	1.32629	24	750	2900	8x8
25	220	227AVG025MFB	0.90429	18	1100	4250	8x12
25	330	337AVG025MFB	0.60286	18	1650	4250	8x12
25	470	477AVG025MFB	0.42328	18	2350	4250	8x12
25	470	477AVG025MGB	0.42328	16	2350	4700	10x12
25	560	567AVG025MGB	0.3553	16	2800	4700	10x12
25	680	687AVG025MGB	0.29256	16	3400	4700	10x12
35	47	476AVG035MFF	4.2328	30	329	2600	8x8
35	68	686AVG035MFF	2.9256	30	476	2600	8x8
35	100	107AVG035MFB	1.9894	26	700	2950	8x12
35	150	157AVG035MFB	1.32629	26	1050	2950	8x12
35	180	187AVG035MFB	1.1052	26	1260	2950	8x12
35	220	227AVG035MFB	0.90429	26	1540	2950	8x12
35	220	227AVG035MGB	0.90429	24	1540	3400	10x12
35	330	337AVG035MGB	0.60286	24	2310	3400	10x12
35	390	397AVG035MGB	0.5101	24	2730	3400	10x12
50	47	476AVG050MFB	4.2328	32	470	2250	8x12
50	68	686AVG050MFB	2.9256	32	680	2250	8x12
50	82	826AVG050MFB	2.4261	32	820	2250	8x12
50	120	127AVG050MFB	1.6579	32	1200	2250	8x12
50	120	127AVG050MGB	1.6579	28	1200	2620	10x12
50	180	187AVG050MGB	1.1052	28	1800	2650	10x12
50	220	227AVG050MGB	0.90429	28	2200	2620	10x12
63	82	826AVG063MFB	2.4261	32	1033	2100	8x12
63	100	107AVG063MFB	1.9894	32	1260	2100	8x12
63	150	157AVG063MGB	1.32629	28	1890	2550	10x12
63	180	187AVG063MGB	1.1052	28	2268	2550	10x12
100	15	156AVG100MFB	13.2629	40	300	1850	8x12
100	22	226AVG100MFB	9.0429	40	440	1850	8x12
100	33	336AVG100MGB	6.0286	38	660	2100	10x12
100	47	476AVG100MGB	4.2328	38	940	2100	10x12
160	4.7	475AVG160MFB	42.3284	130	150	720	8x12
160	6.8	685AVG160MFB	29.2564	130	217	720	8x12
160	12	126AVG160MGB	16.5786	130	384	960	10x12