



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS
RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

PROJ 3346 CODE	LOC DF	DIST X0	P	F	REVISIONS				
					ZONE	LTR	DESCRIPTION	DATE	APPROVED
						0	REL PER 89-3439-004		
				✓		A	REV PER DF-6326 CT	1-93	JC

D
C
B
A

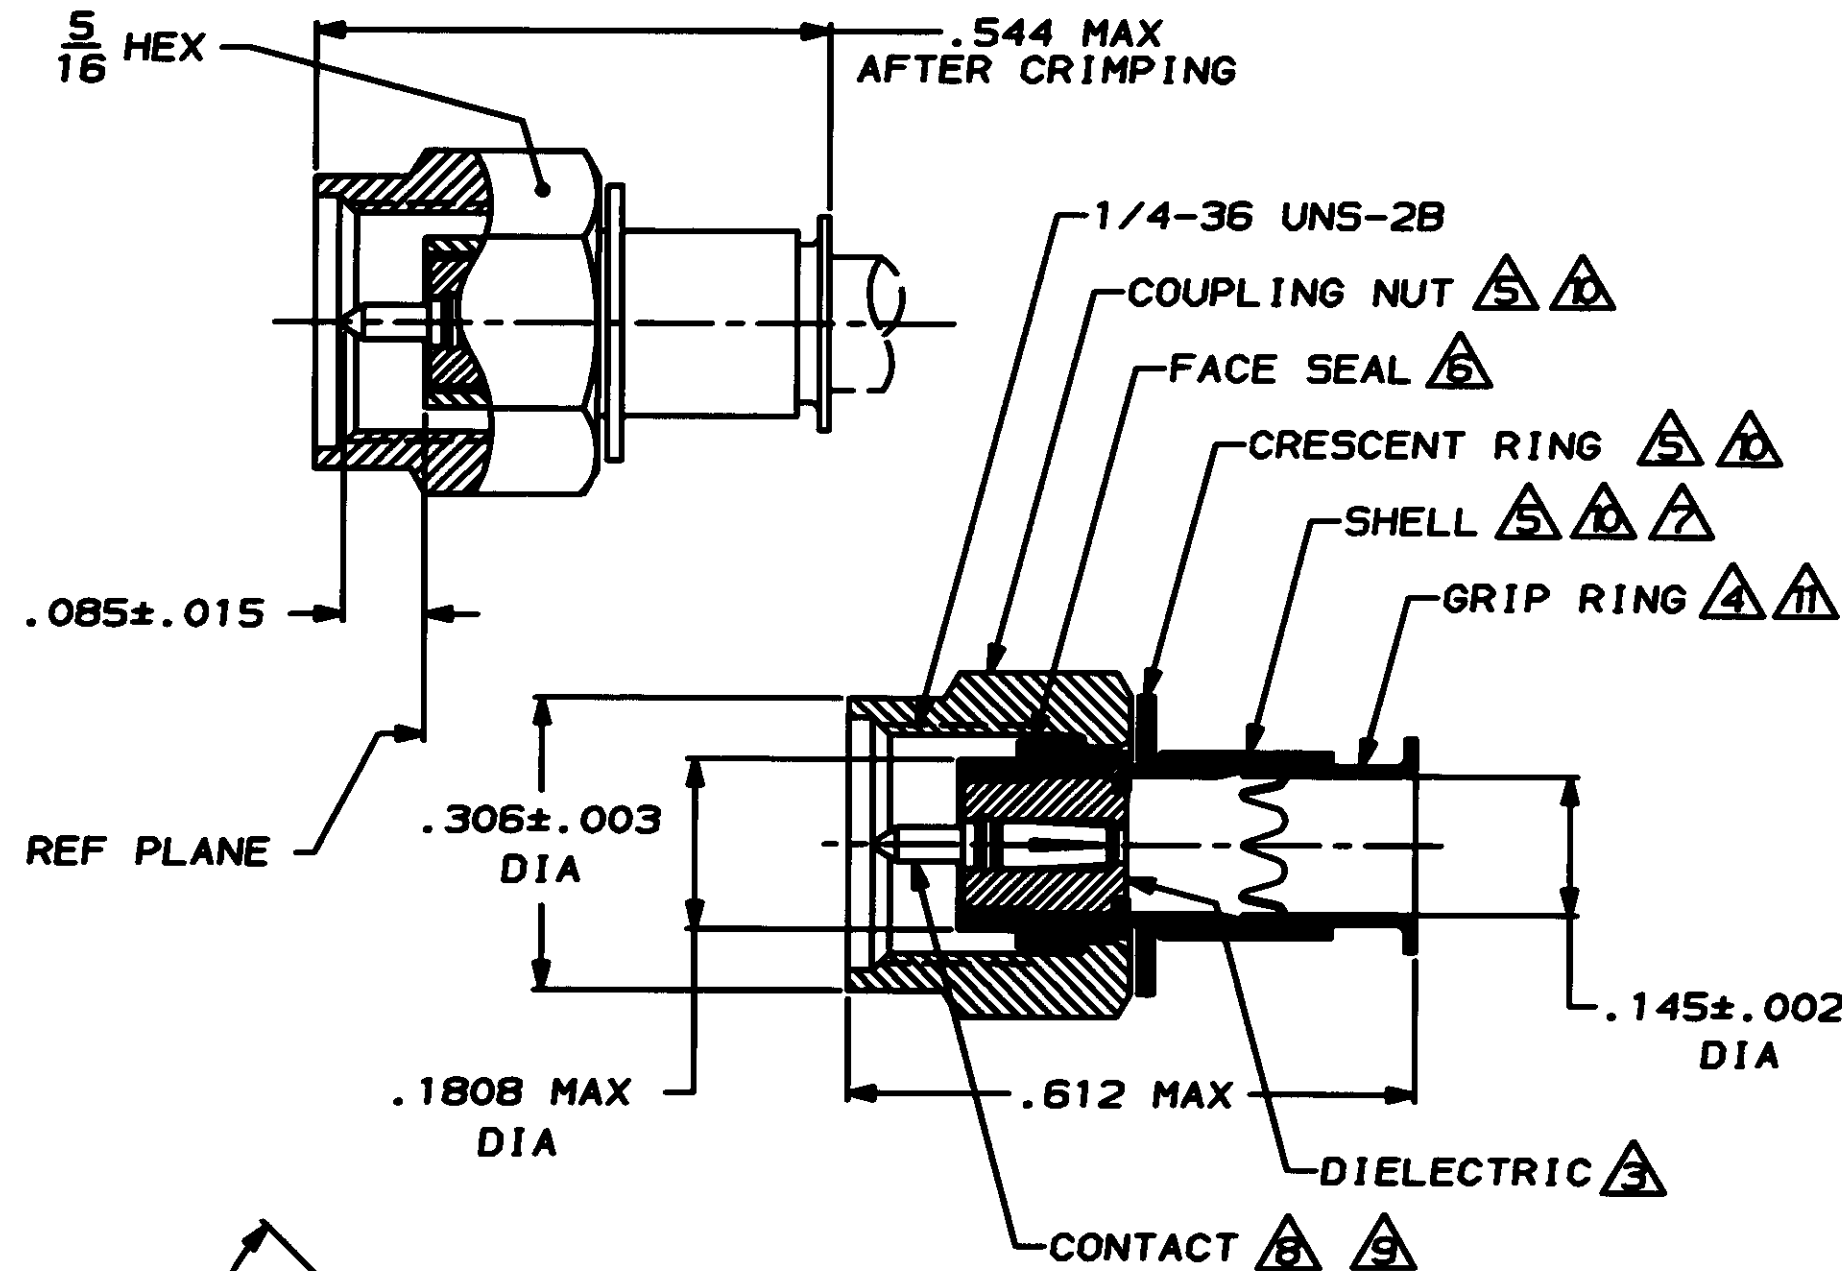

1. FOR USE WITH: RG-402/U OR M17/130-0001, .141^{+0.002}_{-.001} SEMI-RIGID CABLE.
2. SEE I.S. 6788
3. PTFE PER MIL-P-19468
4. BRASS PER MIL-C-50
5. STAINLESS STEEL PER ASTM-A-582
6. SILICONE RUBBER PER ZZ-R-765
7. SEALANT
8. BERYLLIUM COPPER PER QQ-C-530
9. GOLD PL PER MIL-G-45204
10. PASSIVATION PER QQ-P-35
11. NICKEL PL PER QQ-N-290
12. .500 MIN LENGTH OF STRAIGHT CABLE REQUIRED TO APPLY THE CONNECTOR
13. FREQUENCY RANGE: 0 TO 26.5 GHZ

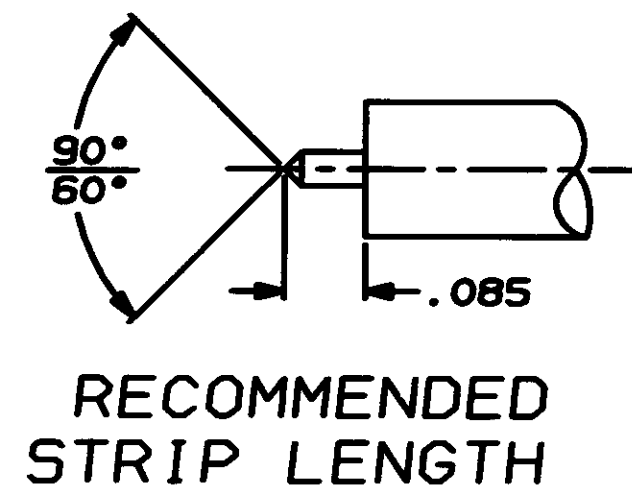

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DEC ± .005 3 PL DEC ± .005 ANGLES ±			446863-1		
MATERIAL 3 THRU 8			PART NO		
FINISH 9 10 11			AMP INCORPORATED Harrisburg, Pa. 17105		
DR 8-35-88 CHK 8-35-88 APPD 10-18-88 APPD 10-18-88 PRODUCT SPEC 108-12089			NAME PLUG, WEATHERPROOF, SERIES SMA		
APPLICATION SPEC			SIZE B	PSCH NO 00779	DRAWING NO 446863
WEIGHT			SCALE 5:1	SHEET 1 OF 1	