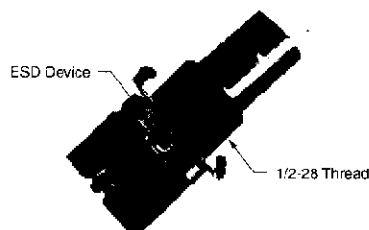



Decoupled Connectors (Continued)**Right Angle BNC Jack
PC Board/Panel Mount
Decoupled to Panel
ESD Protected**

See page 80 Style B for panel cutout and recommended PC board configuration.

Note: See AMP Customer drawing for voltage breakdown rating.


Description	Capacitance/ Voltage	Contact Plating	Clip	Mounting Post	L Mounting Post Length	B*	A*	Part No.
50Ω Product								
Low Profile Right Angle W/ ESD Protection	7900pF 1500VDC	Gold1	Standard	Compliant	2.79 .110	13.18 .519	6.91 .272	414651-3
Low Profile Right Angle W/ Short Electrical Path ESD Protection	9400pF 1500VDC	Gold1	Short Electrical Path	Compliant	4.70 .185	13.18 .519	6.91 .272	415010-1
75Ω Product								
Standard Right Angle W/ ESD Protection	9400pF 1500VDC	Gold1	Standard	Standard	4.01 .158	15.68 .625	8.59 .338	415085-1
Low Profile Right Angle ESD Protected	9400pF 1500VDC	Gold1	Flush	Compliant	2.79 .110	13.18 .519	6.91 .272	415216-1
Low Profile Right Angle ESD Protected	9400pF 1500VDC	Gold1	Extended	Compliant	2.79 .110	13.18 .519	6.91 .272	1274062-1

*See page 80 for dimension reference.

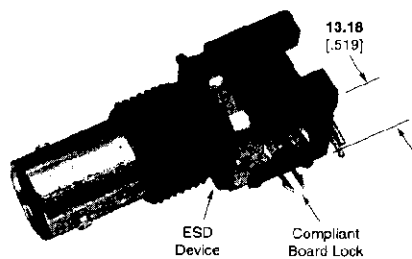
**Right Angle BNC Jack
PC Board/Panel Mount
Decoupled to Board
ESD Protected**

Part No. 415205-1

Capacitance	Voltage
9400pF	1500VDC

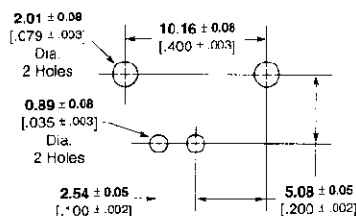

Recommended PC Board Layout



Recommended Panel Cutout