



N Series Connectors MIL-C-39012 — 50 Ohm (Continued)

Dual Crimp Plugs MIL-C-39012/01

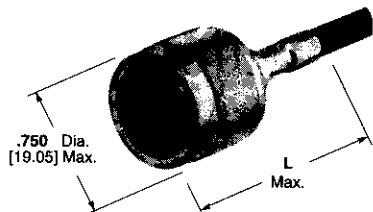



Military Part No.	AMP Part No.	Dim L	RG/U Cable
B0007 Weatherproof	225092-2	1.859 47.22	8, 8A, 213
B0007	51692-2	1.687 42.85	8, 8A, 213
B0013	51692-4	1.687 42.85	11, 11A, 216
B0012 Weatherproof	225092-7	1.859 47.22	225
B0008 Weatherproof	225092-1	1.859 47.22	9, 9A, 9B, 214
B0008	51692-1	1.687 42.85	9, 9A, 9B, 214

Crimp Jacks MIL-C-39012/02

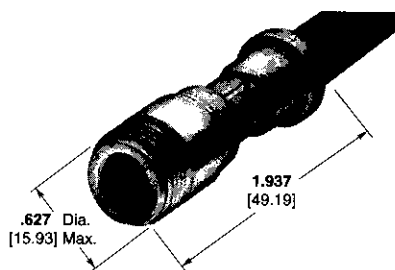

Military Part No.	AMP Part No.	RG/U Cable
B0008	225093-2	8, 8A, 213

Crimp Bulkhead Jacks MIL-C-39012/03

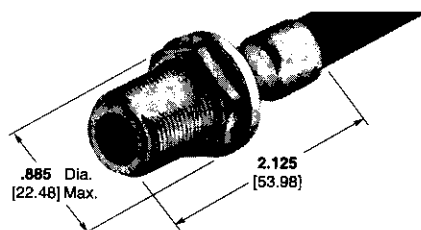


Maximum Panel Thickness .250 [6.35]
Recommended Panel Cutout

Military Part No.	AMP Part No.	RG/U Cable
B0004 Weatherproof	225094-2	8, 8A, 213
B0005 Weatherproof	225094-1	9, 9A, 9B, 214

RF Connectors

Crimp Right-Angle Plugs MIL-C-39012/05

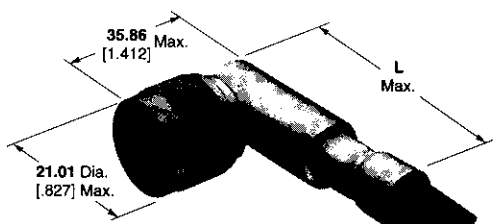

Military Part No.	AMP Part No.	Dim L	RG/U Cable
B0002	225014-2	2.275 57.79	8, 8A, 213
B0002 Weatherproof	225389-2	2.453 62.31	8, 8A, 213
B0003	225014-3	2.275 57.79	9, 9A, 9B, 214