
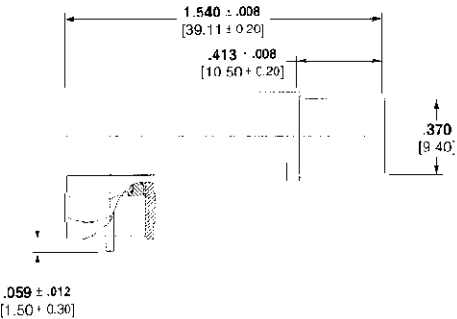


F Series Connectors (Continued)

Plug, Right-Angle




| RG/U Cable   | Termination Type | Center Contact Plating | Body Plating | Part No. | Termination Tooling |
|--------------|------------------|------------------------|--------------|----------|---------------------|
| 6 Std. Cable | Crimp            | Tin                    | Nickel       | 887098-1 | use .324 inch Hex   |

Bulkhead Jacks, Crimp



Front Mount  
Style A

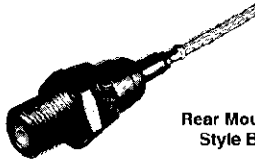

Rear Mount  
Style B


| RG/U Cable                   | Center Contact Plating | Style | Body Plating | Part No. | Die Set                     |
|------------------------------|------------------------|-------|--------------|----------|-----------------------------|
| 179                          | Bright Tin-lead        | A     | Nickel       | 415710-1 | 220210-1*                   |
| 75Ω, ø.086 Conformable Cable | Bright Tin-lead        | A     | Nickel       | 415710-2 | 220210-1*                   |
| RD 179 Double Braid          | Bright Tin-lead        | A     | Nickel       | 415710-3 | 220210-1** for Contact only |
| 179                          | Bright Tin-lead        | B     | Nickel       | 415712-1 | 220210-1*                   |
| 75Ω, ø.086 Conformable Cable | Bright Tin-lead        | B     | Nickel       | 415712-2 | 220210-1*                   |
| RD 179 Double Braid          | Bright Tin-lead        | B     | Nickel       | 415712-3 | 220210-1* for Contact only  |

\*use with hand tool 354940-1  
\*\*use Certi-Crimp Hand Tool 220009-1 for ferrule

Bulkhead Jacks,  
Splash Resistant



Front Mount  
Style A

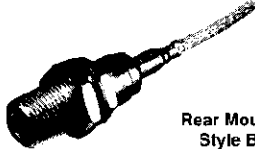

Rear Mount  
Style B

| RG/U Cable                   | Center Contact Plating | Style | Body Plating | Part No. | Die Set                     |
|------------------------------|------------------------|-------|--------------|----------|-----------------------------|
| 179                          | Bright Tin-lead        | A     | Nickel       | 415569-2 | 220210-1*                   |
| 75Ω, ø.086 Conformable Cable | Bright Tin-lead        | A     | Nickel       | 415569-3 | 220210-1*                   |
| RD 179 Double Braid          | Bright Tin-lead        | A     | Nickel       | 415569-4 | 220210-1** for Contact only |
| 179                          | Bright Tin-lead        | B     | Nickel       | 415711-1 | 220210-1*                   |
| 75Ω, ø.086 Conformable Cable | Bright Tin-lead        | B     | Nickel       | 415711-2 | 220210-1*                   |
| RD 179 Double Braid          | Bright Tin-lead        | B     | Nickel       | 415711-3 | 220210-1** for Contact only |

\*use with hand tool 354940-1  
\*\*use Certi-Crimp Hand Tool 220009-1 for ferrule