

G Series Connectors

Bulkhead Jack Feed-Thru



RG/U Cable	Termination Type	Body Plating	Part No.
179	Crimp	Nickel	415683-1
Conformable Cable	Crimp	Nickel	415683-2
RD 179 Double Braid	Crimp	Nickel	415683-3

Termination Tooling: Use 220210-1 die set for Contact only.
Use Certi-Crimp Hand Tool 220009-1 for ferrule.

Bulkhead Jack, PC Board

Contact plating — Silver


Shell — Bright tin

Clip — Bright tin


Connector will accept center conductor diameter range .038-.065 [0.97-1.65]



Part No. 415332-1 (15 Amp)
Part No. 415888-1
Part No. 1274032-1



Recommended Panel Cutout for 415332-1 and 415888-1



Recommended Panel Cutout for 1274032-1


Right-Angle PC Board Plug

Includes board retention feature to prevent tipping during solder process.

Tin-lead plated body to facilitate soldering process.



Part No. 415406-1

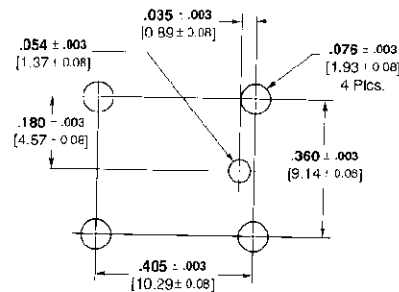

PC Board Layout

Jack, Bulkhead PC Board

Contact plating — Silver

Shell plating — Nickel

Clip plating — Bright tin

Connector will accept center conductor diameter range .038-.042 [0.97-1.07]



Part No. 887000-1