



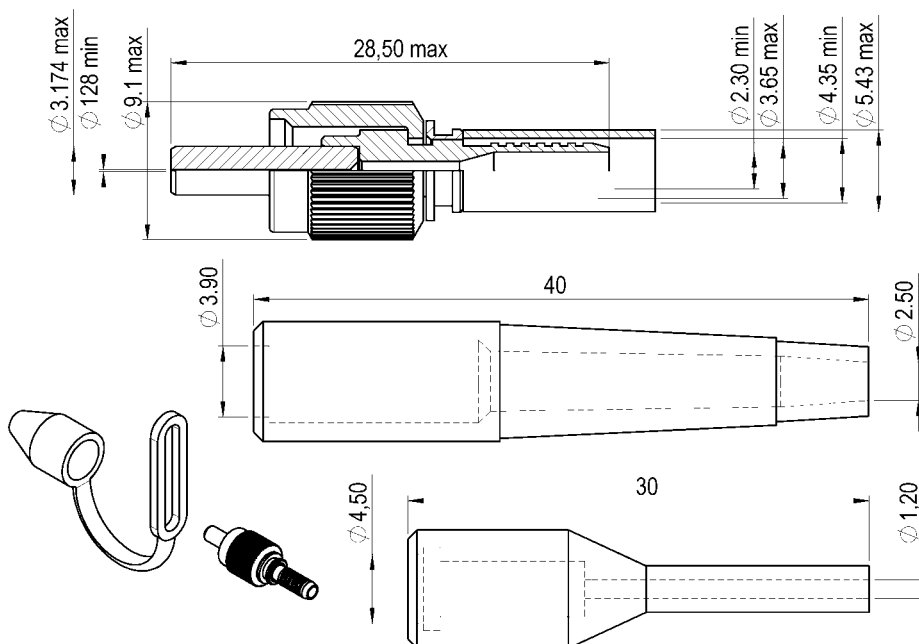
Title : CRIMPING STRAIGHT CONNECTOR 128µm FIBER SIZE

 Series
 FSMA5

 Issue
 27/01/2003

 Page
 1/1

Dimensions : mm


GENERAL

- TYPE :** IEC 874-2 type FSMA5, connector with ceramic ferrule, screw thread coupling device
- FIBER :** 62.5/125µm or 50/125µm multimode fiber, with max buffer Dia : 1 mm
- CABLES :** Tight structure cable with aramid members from 2.4mm through 3.5mm
- INSTALLATION :** See assembly procedures 503 08 530

CHARACTERISTICS (Depending on fibre or cable construction)

- OPTICAL :** Typical insertion loss : 0.7 dB
 Standard deviation: 0.3 dB (CEI 874-1 4.4.7 method7)
- MECHANICAL :** Mating life : 500 Cycles
 Fibre retention : 10 N maxi
 Cable retention : 180 N maxi
 Coupling torque : 40 to 45 N.cm
 Coupling retention : 270N
 Vibration : 10 - 55 Hz, 10g
- CLIMATICAL :** Climatic category : 20/75/4

CREATION					RADIALL®
N°: PEN					101, rue P. Hoffmann
PEN/EP :					93116 ROSNY/BOIS
Name: R. Pugh					FRANCE
Date: 02/09/1995	7/01/03	English version + Redraw CAD	G.M.		Tel : (33) 0149353535
Appr.: G.M	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363