


## SURFACE MOUNT HIGH REPEATABILITY, BROADBAND TO-5 RELAYS DPDT



| SERIES  | RELAY TYPE                                                                         |
|---------|------------------------------------------------------------------------------------|
| GRF300  | Repeatable, RF relay                                                               |
| GRF303  | Sensitive, repeatable, RF relay                                                    |
| GRF303D | Sensitive, repeatable, RF relay with internal diode for coil transient suppression |

### DESCRIPTION

The ultraminiature GRF300 and GRF303 relays are designed to provide a practical surface-mount solution with improved RF signal repeatability over the frequency range. GRF300 and GRF303 relays feature a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. The GRF300/GRF303 version with the improved ground connections can push the performance up into the 10Gbps data rates for digital signal integrity applications. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability. The GRF300 and GRF303 extend performance advantages over similar RF devices that simply offer formed leads for surface mounting. These relays are engineered for use in RF attenuator, RF switch matrices, ATE and other applications that require dependable high frequency signal fidelity and performance.

#### The GRF300 and GRF303 feature:

- High repeatability
- Broader bandwidth
- Metal enclosure for EMI shielding

- High isolation between control and signal paths
- High resistance to ESD


The following unique construction features and manufacturing techniques provide excellent robustness to environmental extremes and overall high reliability:

- Uniframe motor design provides high magnetic efficiency and mechanical rigidity
- Minimum mass components and welded construction provide maximum resistance to shock and vibration
- Advanced cleaning techniques provide maximum assurance of internal cleanliness
- Gold-plated precious metal alloy contacts ensure reliable switching
- Hermetically sealed






### ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS

|                                      |                  |                          |
|--------------------------------------|------------------|--------------------------|
| <b>Temperature</b><br>(Ambient)      | <b>Storage</b>   | -65°C to +125°C          |
|                                      | <b>Operating</b> | -55°C to +85°C           |
| <b>Vibration</b><br>(General Note I) |                  | 10 g's to 500 Hz         |
| <b>Shock</b><br>(General Note I)     |                  | 30 g's,<br>6ms half sine |
| <b>Enclosure</b>                     |                  | Hermetically sealed      |
| <b>Weight</b>                        | <b>GRF300</b>    | 0.09 oz. (2.55g) max.    |
|                                      | <b>GRF303</b>    | 0.16 oz. (4.5g) max.     |

### INTERNAL CONSTRUCTION

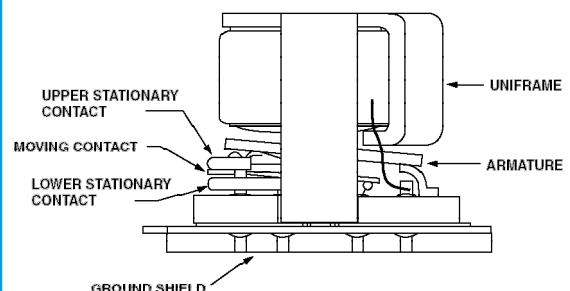

**SERIES GRF300/GRF303**  
**TYPICAL RF CHARACTERISTICS (See RF Notes)**

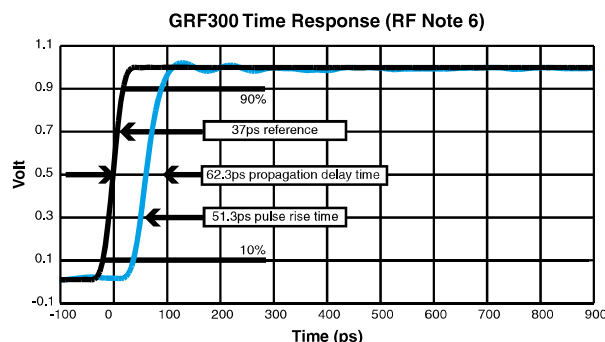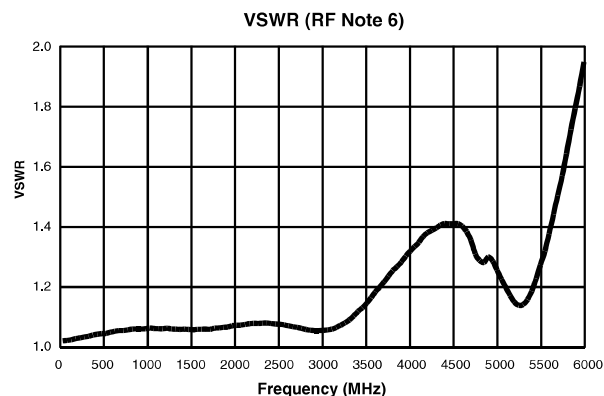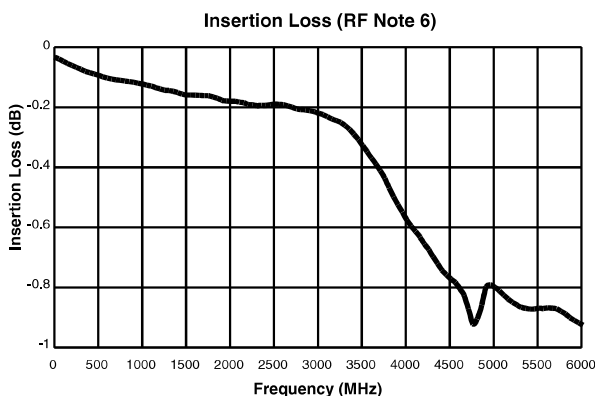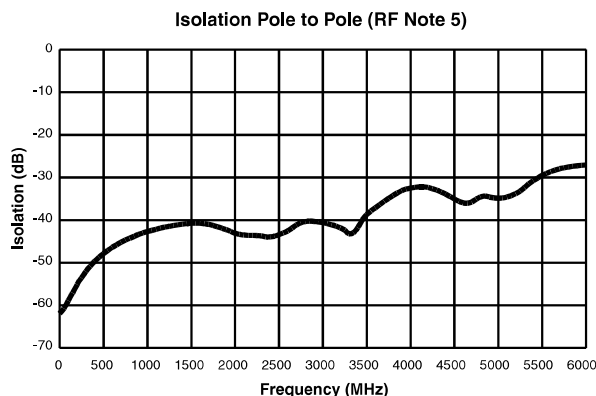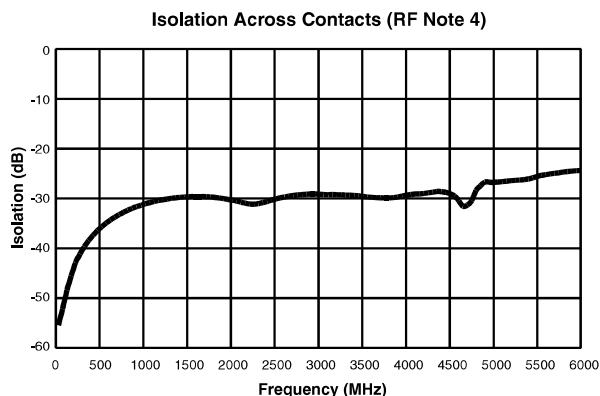


**RF NOTES**


- Test conditions:
  - Fixture: .031" copper clad, reinforced PTFE, RT/duroid® 6002 with SMA connectors. (RT/duroid® is a registered trademark of Rogers Corporation.)
  - RF ground shield is soldered to PCB RF ground plane.
  - Room ambient temperature.
  - Terminals not tested were terminated with 50-ohm load.
  - Contact signal level: -10 dBm.
  - No. of test samples: 2.
- Data presented herein represents typical characteristics and is not intended for use as specification limits.
- Data is per pole, except for pole-to-pole data.
- Data is the average from readings taken on all open contacts.
- Data is the average from readings taken on poles with coil energized and de-energized.
- Data is the average from readings taken on all closed contacts.
- Test fixture effect de-embedded from frequency and time response data.

**SERIES GRF300 AND GRF303**  
**TYPICAL RF INSERTION LOSS REPEATABILITY CHARACTERISTICS**  
(See RF Insertion Loss Repeatability Notes)

REPEATABILITY CHARACTERISTICS GRF300 RELAYS

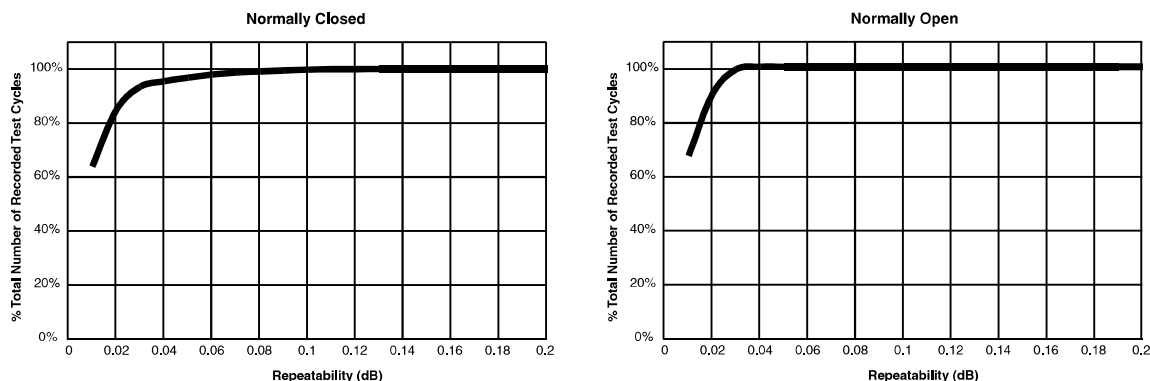

REPEATABILITY CHARACTERISTICS GRF303 RELAYS

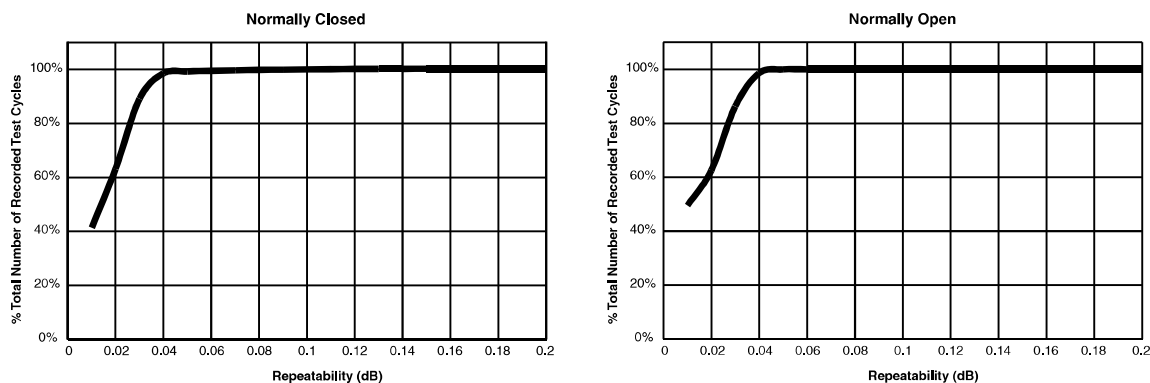


**RF INSERTION LOSS REPEATABILITY NOTES**

- Test conditions:
  - Fixture: .031" copper clad, reinforced PTFE, RT/duroid® 6002 with SMA connectors. (RT/duroid® is a registered trademark of Rogers Corporation.)
  - Test performed at room ambient temperature.
  - Contact signal level: 20dBm.
- Data presented herein represents typical characteristics and is not intended for use as specification limits.
- Insertion loss repeatability measured over frequency range from 50MHz to 4GHz.

**SERIES GRF300/GRF303**

**TYPICAL RF REPEATABILITY PERFORMANCE (See RF Notes 1,2 and 3)**

**1 Million Cycle Repeatability       $\pm 0.1$  dB from DC to 3GHz**

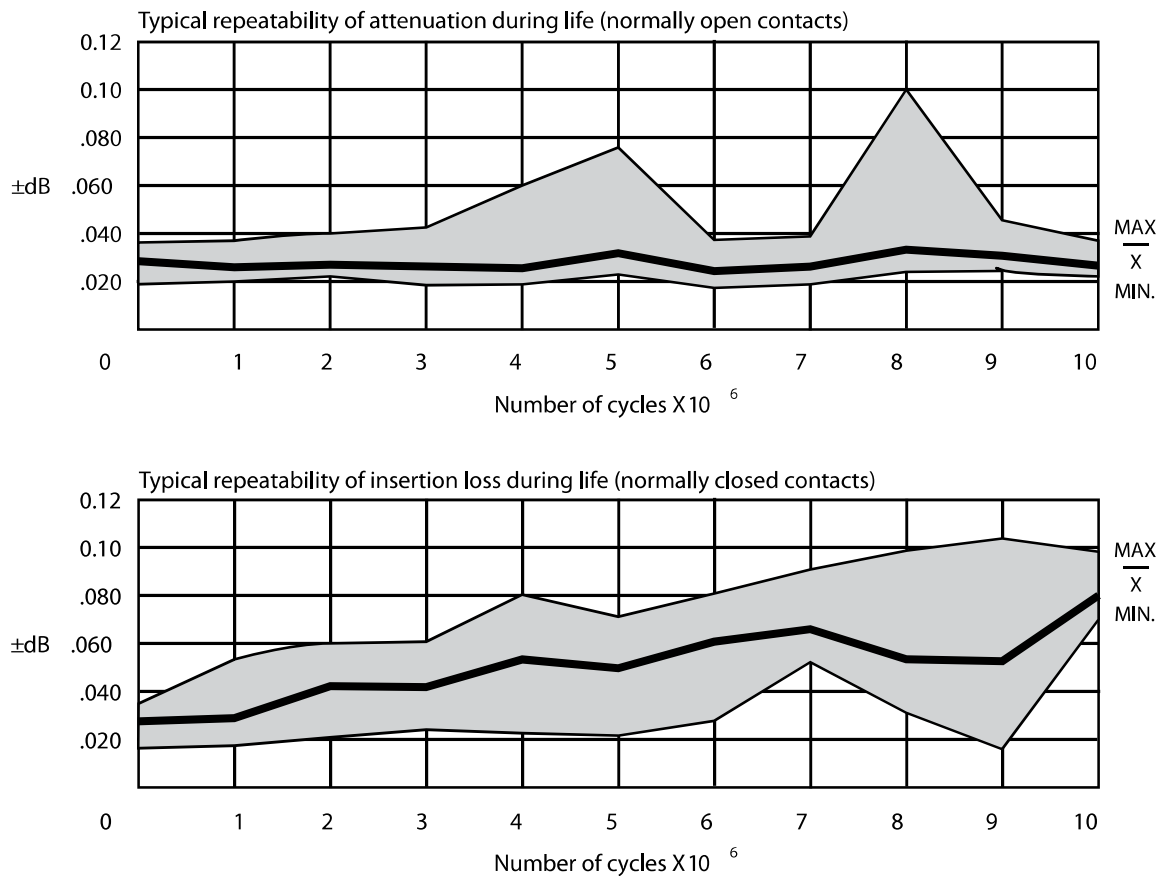

**RF NOTES**

1. One million cycle repeatability data is based upon 396 observations with an average repeatability  $\pm 0.033$  dB and a range of  $\pm 0.093$  dB.
2. Repeatability of attenuation values were obtained from tests conducted in a 20 dB attenuator network with a 0 dBm input signal.
3. Relay operates at frequencies higher than 3 GHz with reduced RF performance characteristics.
4. Curves were developed from tests performed on a 0.031" copper clad, reinforced PTFE circuit board at 20°C (ref). The unused contacts were terminated in 50 ohms; characteristic impedance of measuring equipment is 50 ohms. The relays were mounted flush to the circuit board ground plane without the relay header soldered to the ground plane.

**SERIES GRF300/GRF303**  
**GENERAL ELECTRICAL SPECIFICATIONS (@25°C)**

|                                 |                                                                    |
|---------------------------------|--------------------------------------------------------------------|
| <b>Contact Arrangement</b>      | 2 Form C (DPDT)                                                    |
| <b>Rated Duty</b>               | Continuous                                                         |
| <b>Contact Resistance</b>       | 0.15 $\Omega$ max.                                                 |
| <b>Contact Load Rating</b>      | Resistive: 1Amp/28Vdc<br>Low level: 10 to 50 $\mu$ A @ 10 to 50 mV |
| <b>Contact Life Ratings</b>     | 10,000,000 cycles (typical) at low level                           |
| <b>Coil Operating Power</b>     | GRF300-5: 500 mW @ nominal coil                                    |
|                                 | GRF303-5: 250 mW @ nominal coil                                    |
| <b>Operate Time</b>             | GRF300: 4.0mS max.<br>GRF303: 6.0mS max.                           |
| <b>Release Time</b>             | GRF300: 3.0 mS max.<br>GRF303: 3.0 mS max.                         |
| <b>Intercontact Capacitance</b> | 0.4 pf typical                                                     |
| <b>Insulation Resistance</b>    | 1,000 M $\Omega$ min. between mutually isolated terminals          |
| <b>Dielectric Strength</b>      | 350 Vrms (60 Hz) @ atmospheric pressure                            |


**DETAILED ELECTRICAL SPECIFICATIONS (@25°C)**

| BASE PART NUMBERS (GRF300)                          |        | GRF300-5 | GRF300-12 |
|-----------------------------------------------------|--------|----------|-----------|
| <b>Coil Voltage, Nominal (Vdc)</b>                  |        | 5.0      | 12.0      |
| <b>Coil Resistance (Ohms <math>\pm 20\%</math>)</b> | GRF300 | 50       | 390       |
| <b>Pick-up Voltage (Vdc max.)</b>                   | GRF300 | 3.6      | 9.0       |


| BASE PART NUMBERS (GRF303)                          |        | GRF300-5 | GRF300-12 |
|-----------------------------------------------------|--------|----------|-----------|
| <b>Coil Voltage, Nominal (Vdc)</b>                  |        | 5.0      | 12.0      |
| <b>Coil Resistance (Ohms <math>\pm 20\%</math>)</b> | GRF303 | 100      | 850       |
| <b>Pick-up Voltage (Vdc max.)</b>                   | GRF303 | 3.6      | 9.0       |

# SERIES GRF300 AND GRF303

## TYPICAL SIGNAL INTEGRITY CHARACTERISTICS @ 10 Gbps

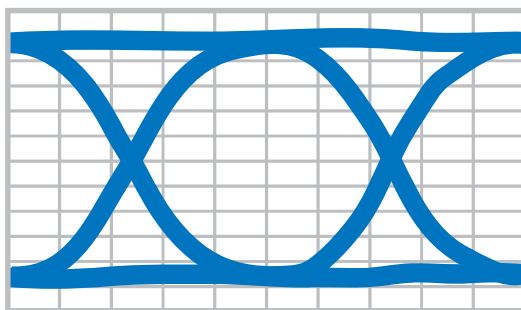

- i.  $R_{tOFF} = 31.1 \text{ pS}$ .
- ii.  $F_{tOFF} = 32 \text{ pS}$ .
- iii.  $V_{OFF} = 511.95 \text{ mVpp}$ .

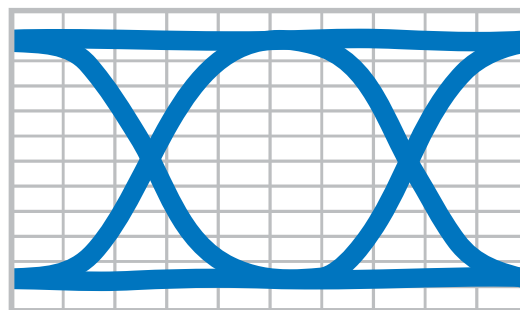

- i.  $R_{tON} = 30.2 \text{ pS}$ .
- ii.  $F_{tON} = 30.7 \text{ pS}$ .
- iii.  $V_{ON} = 512.54 \text{ mV}$ .

### MEASUREMENTS NOTES

Measurements were made using the Agilent AG86100 Digital Communication Analyzer with 12GHz-pattern generator and 10GHz-clock source. The relay was mounted on an evaluation board. Two RF 3-foot long cables were used for measurements.

#### Pattern Generator Settings


- $2^{31}-1$  PRBS signal
- 10Gbps data rate
- Data amplitude of 500mVpp

#### Oscilloscope Settings

- Measurement threshold set to 20%–80%


NRZ Eye/Mask mode measurements: rise time, fall time, eye ramp and bit rate

## GRF303 Insertion Loss

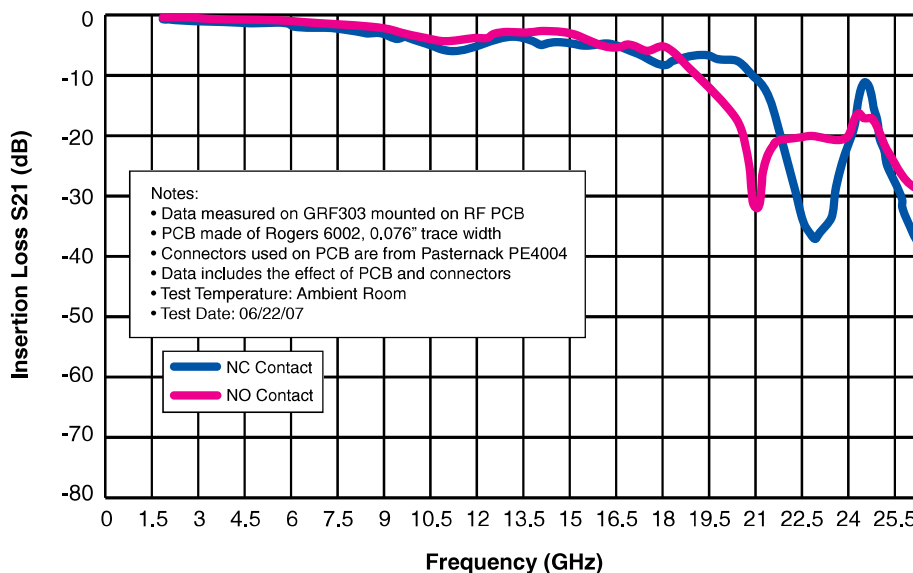


Note: For Insertion Loss measurements in lower bandwidth (<6GHz) see chart on the next page.

## SERIES GRF300/GRF303 OUTLINE DIMENSIONS

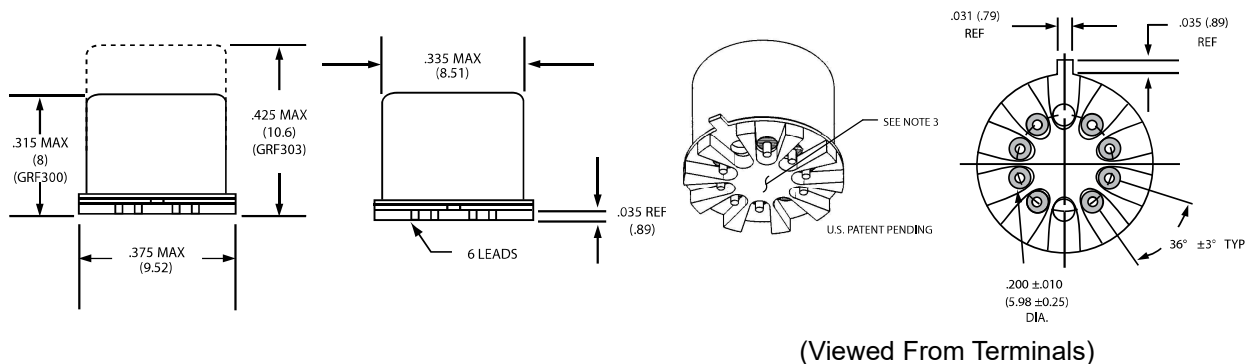

## SCHEMATIC DIAGRAMS




GRF300/GRF303

### NOTES:

1. DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS SHOWN IN [ ].
2. POSITIONS 5 AND 10 ARE FOR UNINSULATED CASE GROUND OPTIONS.
3. NO PROTRUSION BELOW BOTTOM OF HEADER WHEN GROUND PINS ARE INSTALLED
4. TO ORDER THE CASE GROUND OPTION, AFTER THE SERIES DESIGNATOR, ADD "Y" TO THE PART NUMBER FOR POSITION 5 OR "Z" TO THE PART NUMBER FOR POSITION 10.
5. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON DIMENSIONS ARE ± .010 INCH (0.025 MM)

## Teledyne Part Numbering System for GRF300/GRF303 Relays

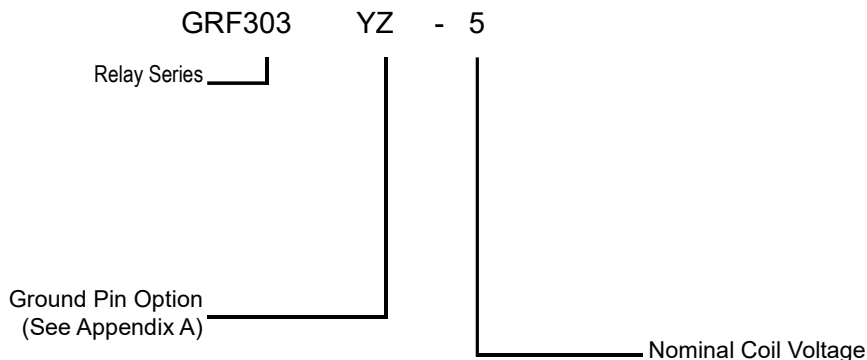


## GENERAL NOTES

- Relays will exhibit no contact chatter in excess of 10 μsec or transfer in excess of 1 μsec.
- For reference only. Coil resistance not directly measureable at relay terminals due to internal series diode.

**SERIES GRF300/GRF303**


**TYPICAL SIGNAL INTEGRITY CHARACTERISTICS @ 10 Gbps**

**Normally Closed (Typ.)**

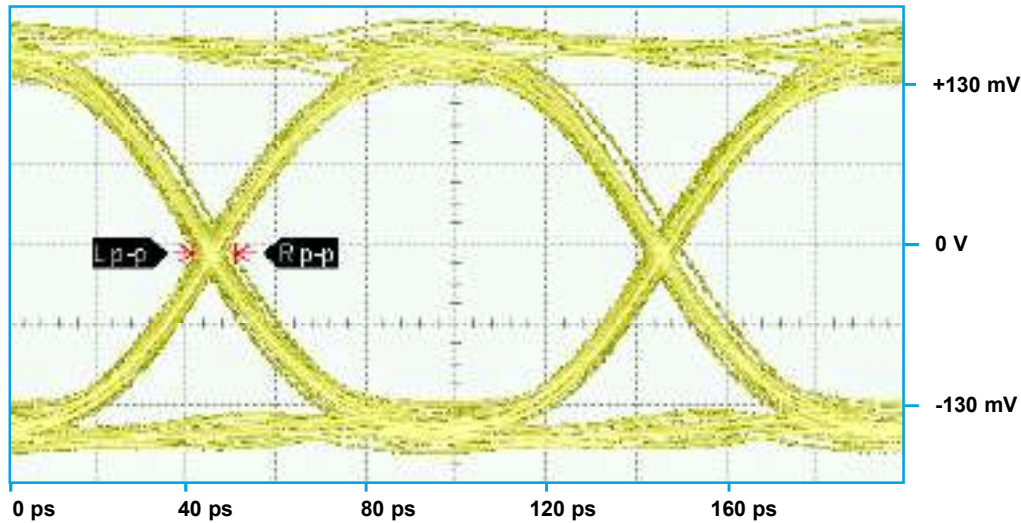

| Bit Rate | Eye Height | Eye Width | Jitter <sub>P-P</sub> |
|----------|------------|-----------|-----------------------|
| 10 Gbps  | 237.6 mV   | 90.08 ps  | 9.33 ps               |

**Normally Open (Typ.)**

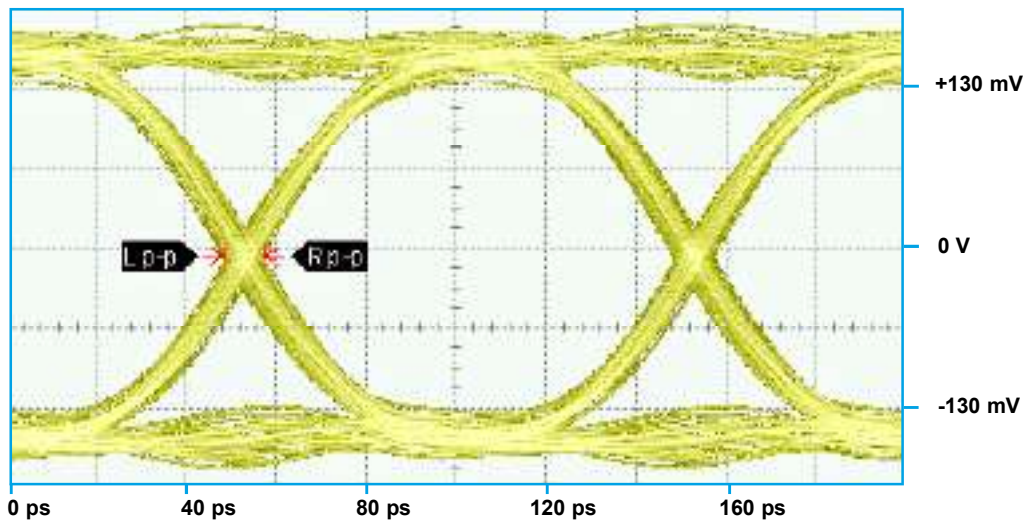


| Bit Rate | Eye Height | Eye Width | Jitter <sub>P-P</sub> |
|----------|------------|-----------|-----------------------|
| 10 Gbps  | 255.2 mV   | 88.93 ps  | 8.89 ps               |

**PATTERN GENERATOR SETTINGS**

- 10 Gbps Random Pulse Pattern Generator
- $2^{31} - 1$  PRBS signal
- PRBS output of 300 mV<sub>P-P</sub> (nominal)
- RF PCB effect (negligible) not removed from measurement
- Data shown is typical of both poles

**SERIES GRF300/GRF303**  
**TYPICAL SIGNAL INTEGRITY CHARACTERISTICS @ 18 Gbps**

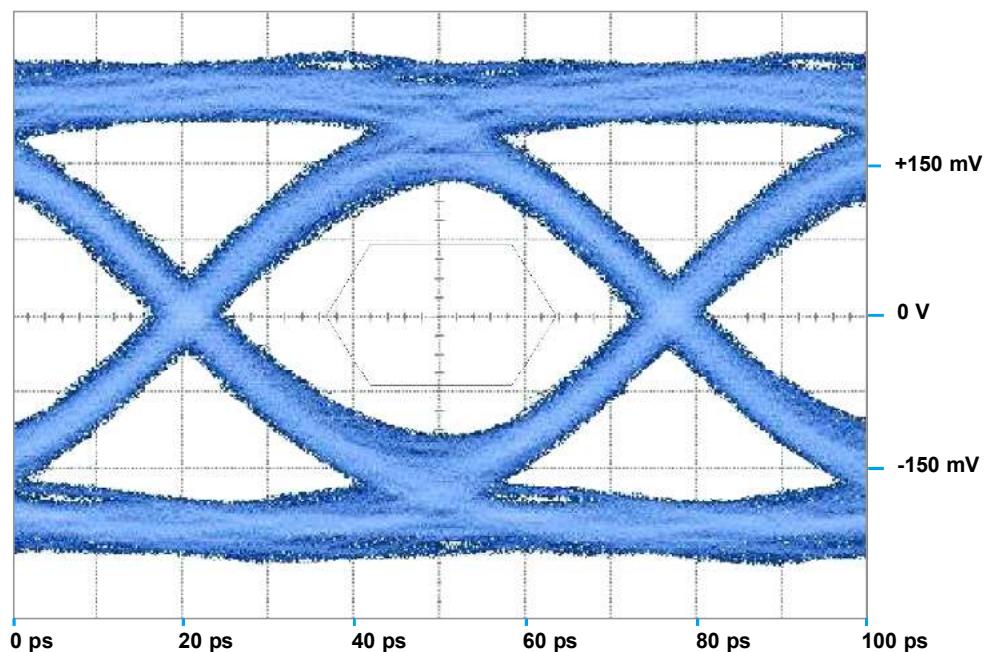

| Bit Rate | Eye Height | Eye Width | Jitter <sub>p,p</sub> |
|----------|------------|-----------|-----------------------|
| 18 Gbps  | 185 mV     | 46.4 ps   | 10.44 ps              |

**PATTERN GENERATOR SETTINGS**

- 18 Gbps Random Pulse Pattern Generator
- $2^{31} - 1$  PRBS signal
- PRBS output of 300 mV<sub>p,p</sub> (nominal)
- RF PCB effect (negligible) not removed from measurement
- Data shown is typical of both poles