


COAXIAL CONNECTOR, MCX, 50 Ohm, Straight bulkhead receptacle, jack (female)

22_MCX-50-0-19/111_N

Properties

- Small size
- Easy to connect and disconnect
- Wide range of board connectors and cable connectors available

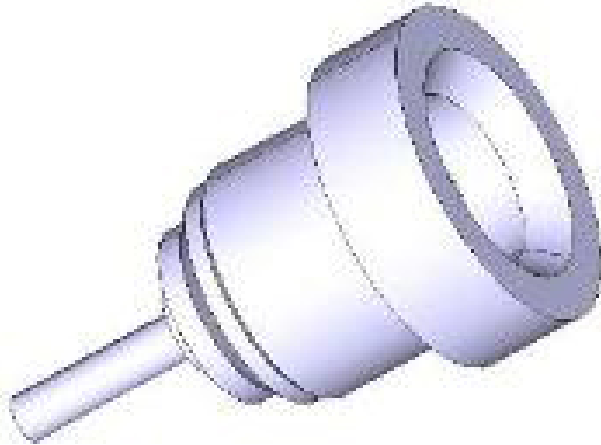

Product configuration

Interface type	Gender	Standard
MCX	jack	IEC 60169-36_CEECC 22220

Interface and material data

Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO Plating
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PFA / PTFE	

Electrical data

Impedance	50 Ω
Interface frequency	6 GHz

Mechanical data

Weight	0.0007 kg
Mating cycles	500
Flange type	round flange / dia. 6.35
Tab style	PIN

Environmental data

Operation temperature	-65 °C ... 165°C
-----------------------	------------------

Ordering Information Table

Item number	Item description	Packaging type
22652984	22_MCX-50-0-19/111_NH	Bulk 100 pcs

COAXIAL CONNECTOR, MCX, 50 Ohm, Straight bulkhead receptacle, jack (female)
22_MCX-50-0-19/111_N

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2806 / Date of publication: 26.11.2023 / uncontrolled copy