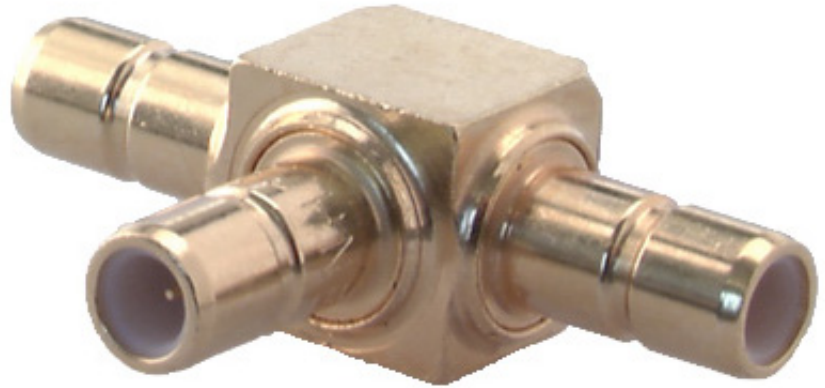


COAXIAL ADAPTER, SMB, 50 Ohm, T-style, 3 jacks (female)

46_SMB-50-0-2/111_N

Properties

- Wide range of different configurations
- Most common interfaces available
- Accurate transitions
- Effective and reliable interconnection solutions
- Appropriate materials

**Product configuration**

Interface type	Gender	Standard
SMB	jack (female)	IEC 60169-10_MIL-STD-348A/311_CECC 22130
SMB	jack (female)	IEC 60169-10_MIL-STD-348A/311_CECC 22130

Interface and material data

SMB		
Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	
SMB		
Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

Electrical data

Impedance	50 Ω
Interface frequency	4 GHz

Mechanical data

Weight	0.0029 kg
Mating cycles	500

COAXIAL ADAPTER, SMB, 50 Ohm, T-style, 3 jacks (female)
46_SMB-50-0-2/111_N

Environmental data	
Operation temperature	-65 °C ... 165 °C

Ordering Information Table		
Item number	Item description	Packaging type
22640228	46_SMB-50-0-2/111_NE	Single

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P1896 / Date of publication: 27.05.2024 / uncontrolled copy