

EMP Protector 3400.31.0001

Description

Quarter-wave stub technology


Benefits

Broad-band design

The protector can also be installed reversely

Multi-band operation

Compliant to IEC 61643-21

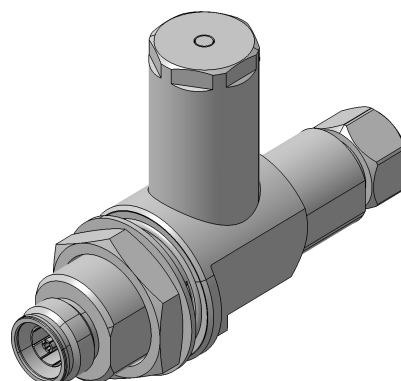

Product Configuration

Main path connectors
Mounting and grounding
Side of bulkhead

Port 1: unprotected, 4.3-10 plug (male) - Port 2: protected, 4.3-10 jack (female)
MH110 (bulkhead mounting), M8 (screw), brk (bracket)
protected side

Technical Data

Electrical Data

Impedance	50 Ω	
Frequency range	690 - 2700 MHz	
Return loss	≥ 24 dB	
Insertion loss	0.1 dB typ.	≤ 0.1 dB
RF CW power	≤ 1500 W	
PIM 3rd order	-160 dBc max.	

Surge current handling capability	100 single / 80 kA multiple kA (test pulse 8/20 μ s)
Residual pulse energy	11 μ J typically (test pulse 4 kV 1.2/50 μ s / 2 kA 8/20 μ s) main path - protected side

Environmental Data

Operating temperature	-40 °C to +85 °C
Waterproof degree	IP67 (according to IEC 60529, data refer to the coupled state)
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Housing	Brass	SUCOPLATE (R) Plating
Port 1 center contact	Brass	Silver Plating
Port 2 center contact	Bronze	Silver Plating

Related Documents

Outline drawing	DOU-00257645
Mounting instruction	DOC-0000176104