

Sencity Special Communication Antenna 852627

Description

2-Port Panel Antenna
Frequency Range 380-500 MHz
Dual Polarization (X-Pol)
Half-power Beam Width 65°
Gain 15 dBi



Product Configuration

Technical Data

Electrical Data

	Band 1	Band 2
Frequency (MHz)	380 - 430	430 - 500
VSWR	1.5	1.5
Impedance (Ohm)	50	50
Gain (dBi)	14.5	15
3dB beamwidth (h) (°)	65	65
3dB beamwidth (v) (°)	18	18
Composite power max (W)	500	500
Ambient temperature (°C)	50	50
Front to back ratio (dB)	25	25
Port Isolation (dB)	30	30

Ports

	Port 1	Port 2
Port name	-45°	+45°
Connector	7/16, jack (female)	7/16, jack (female)
Polarization	-45° slant	+45° slant
DC grounded	Yes	Yes

Connections

	Band 1	Band 2
Port 1	X	X
Port 2	X	X

General Data

IMD level -150 dBc at carrier power 2x 43dBm

Mechanical Data

Dimensions (mm) 2000 x 492 x 190 (Height x Width x Depth)
Weight (kg) 19
Windload frontal: 1100 N at 150 km/h, lateral: 440 N at 150 km/h, Wind speed survival: 200 km/h

Packing size (mm): 2080x523x252

Environmental Data

Environmental conditions outdoor
2011/65/EU (RoHS - including compliant
2015/863 and 2017/2102)

Sencity Special Communication Antenna 852627

WEEE 2012/19/EU
REACH 1907/2006/EC

no special marking needed
compliant

Grounding:

The metal parts of the antenna including the mounting kit and the inner conductors are DC grounded.

Ice protection:

Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.

Material:

Reflector screen: Weather-proof aluminum.

All screws and nuts: Stainless steel.

Material Data

Radome colour	grey
Radome material	Glass Reinforced Plastic (GRP)
Back plate/base plate colour	grey
Back plate/base plate material	Aluminium

Related Products

738546 Clamp 42-115mm

85010002 Clamp 110-220mm

85010003 Clamp 210-380mm


85010009 Downtilt Kit

Order separately. For downtilt mounting use the clamps for an appropriate mast diameter together with the downtilt kit.

Related Documents

Mounting instruction	DOC-0000871234
Security instruction	DOC-0000278984
Outline drawing	DOU-00397603

Additional Information

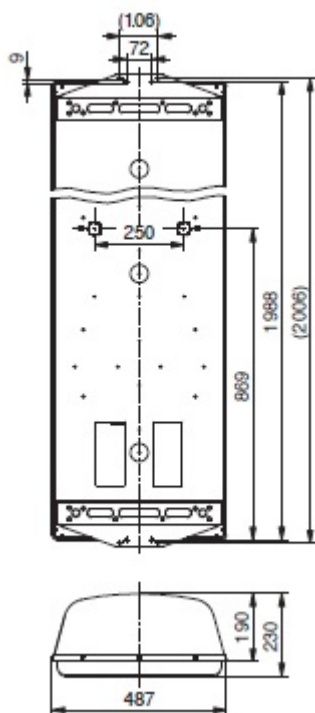

Sencity Special Communication Antenna 852627