

INCH-POUND


MIL-DTL-83517/3A
31 May 2005
SUPERSEDING
MIL-C-83517/3
20 September 1982

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY, STRIP OR MICROSTRIP TRANSMISSION LINE, SERIES SMA (SOCKET CONTACT, FLANGE MOUNTED SLOTTED TAB TERMINAL)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of
this specification sheet and [MIL-C-83517](#).

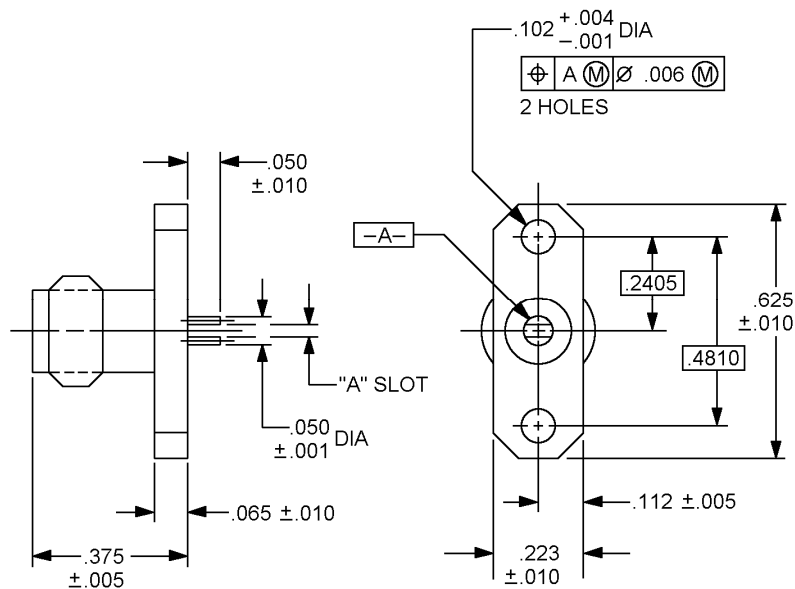

Part or Identifying Number (PIN)	"A" dim.
M83517/3-31001	.012 + .003 - .001
M83517/3-31002	.018 + .003 - .001
M83517/3-31003	.028 + .003 - .001

Inches	mm	Inches	mm
.001	.03	.028	.71
.002	.05	.050	1.27
.003	.08	.065	1.65
.004	.10	.102	2.59
.005	.13	.112	2.84
.006	.15	.223	5.66
.010	.25	.2405	6.109
.012	.30	.375	9.53
.018	.46	.4810	12.217
		.625	15.88

NOTES:


1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All undimensioned pictorial configurations are for reference purposes only.
4. Number two screws are suggested for mounting.

FIGURE 1. Series SMA, socket contact, (2 hole) flange mounted receptacle.

AMSC N/A

FSC 5935

MIL-DTL-83517/3A

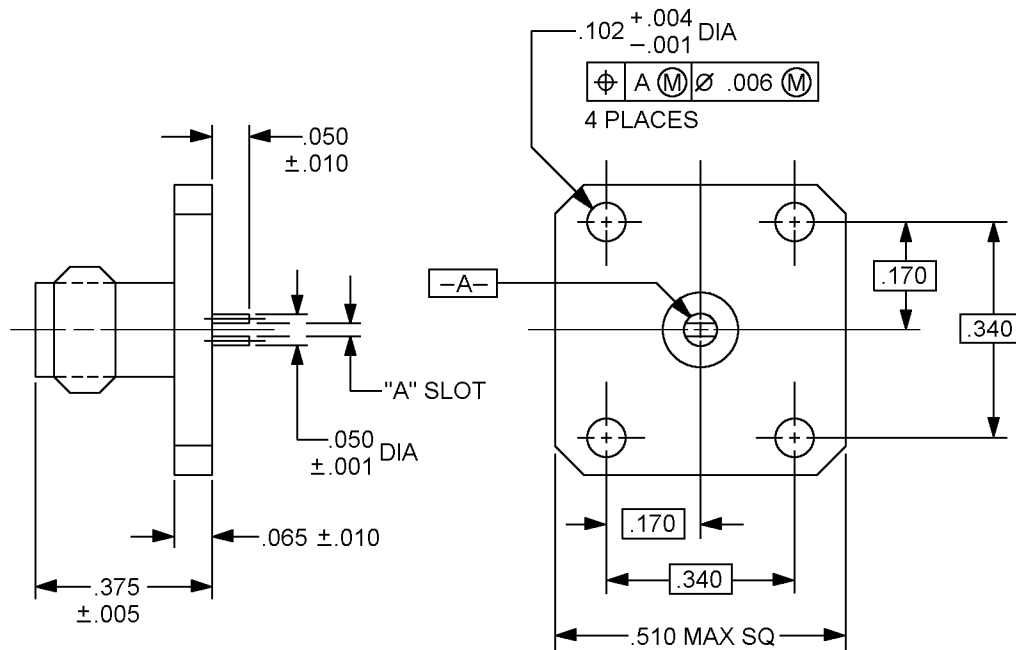

PIN	"A" dim.
M83517/3-31004	.012 + .003 - .001
M83517/3-31005	.018 + .003 - .001
M83517/3-31006	.028 + .003 - .001


Inches	mm	Inches	mm
.001	.03	.028	.71
.003	.08	.050	1.27
.004	.10	.065	1.65
.005	.13	.102	2.59
.006	.15	.170	4.32
.010	.25	.340	8.64
.012	.30	.375	9.53
.018	.46	.510	12.95

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All undimensioned pictorial configurations are for reference purposes only.
4. Number two screws are suggested for mounting.

FIGURE 2. Series SMA, socket contact, (4 hole) flange mounted receptacle.

MIL-DTL-83517/3A

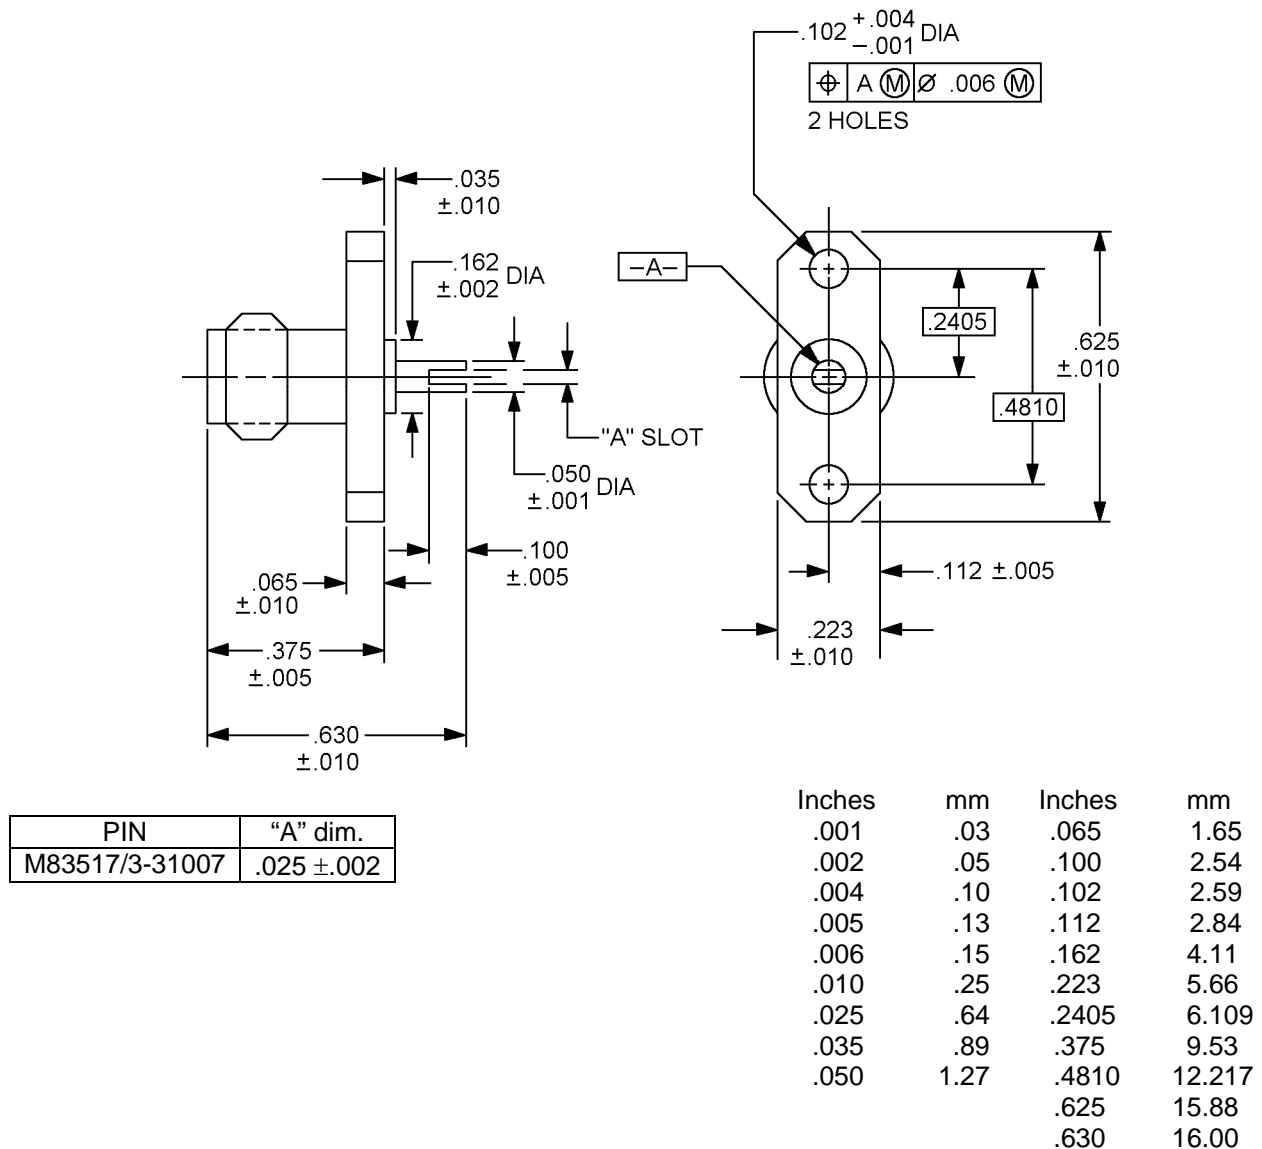

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All undimensioned pictorial configurations are for reference purposes only.
4. Number two screws are suggested for mounting.

FIGURE 3. Series SMA, socket contact, (2 hole) flange mounted receptacle, extended contact.

ENGINEERING PARAMETERS

Nominal impedance: 50 ohms.

Voltage rating: 335 V rms maximum at sea level.
150 V rms maximum at 70,000 feet.

Frequency range: 0 to 18.0 GHz.

Temperature rating: -65°C to 105°C.

REQUIREMENTS

Design and construction: See figures 1 through 3, table I and [MIL-STD-348](#).

Force to engage and disengage:

Torque – 2 inch-pounds maximum.
Longitudinal force – Not applicable.

Coupling proof torque: Not applicable.

Inspection note: For each test of threaded coupling connector where the test is performed on mated pairs, the pairs shall be torqued to 7 to 10 inch-pounds.

Contact gaging: See figure 4.

Contacts with spring members:

Center contact (socket):

Oversize test pin - .0375 +.0001.
Test pin finish – 16 microinches.
Insertion depth - .030/.045.
Number of insertions – 3.


Insertion force test: Steel test pin diameter .0370 + .0001.

Insertion depth - .050/.075.
Test pin finish – 16 microinches.
Insertion force – 3 pounds maximum.

Withdrawal force test: Steel test pin diameter .0355 - .0001.

Insertion depth - .050/.075.
Withdrawal force – 1 ounce minimum.
Test pin finish – 16 microinches.

MIL-DTL-83517/3A

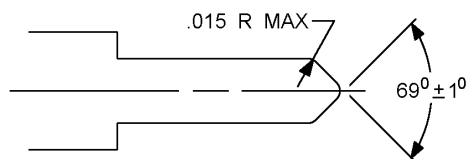

Inches mm
.015 0.38

FIGURE 4. Test pin data.

TABLE I. PIN and characteristics.

PIN M83517/3-	Connector figure no.	Characteristics
31001	1	2 hole flange mount. .012 inch (0.30 mm) wide tab.
31002	1	2 hole flange mount. .018 inch (0.46 mm) wide tab.
31003	1	2 hole flange mount. .028 inch (0.71 mm) wide tab.
31004	2	4 hole flange mount. .012 inch (0.30 mm) wide tab.
31005	2	4 hole flange mount. .018 inch (0.46 mm) wide tab.
31006	2	4 hole flange mount. .028 inch (0.71 mm) wide tab.
31007	3	2 hole flange mount. .025 inch (0.64 mm) wide tab.

Permeability of nonmagnetic materials: Applicable.

Seal:

Hermetic sealed connectors: Not applicable.

Pressurized and weatherproof connectors: Not applicable.

Insulation resistance: 5,000 megohms minimum in accordance with test procedure EIA-364-21.

Center contact retention:

Axial force: 6 pounds minimum.

Torque: 4 inch-ounces minimum.

Dielectric withstanding voltage: In accordance with test procedure EIA-364-20, test condition I.

Test voltage 1,000 V rms.

Corrosion: In accordance with test procedure EIA-364-26, test condition B.

Voltage standing wave ratio (VSWR): 1.35 +.01F (F in GHz), maximum.

Test frequency range: From .5 to 18.0 GHz. (Using a test method approved by the qualifying activity.)

MIL-DTL-83517/3A

RF transmission loss: $.07 \sqrt{F}$ (F in GHz) tested from 2-18 GHz.

RF leakage: Not applicable.

Connector durability:

Interface:

500 cycles minimum at 12 cycles/minute maximum rate.

Connector shall meet contact gaging and force to engage and disengage requirements.

Contact resistance: In milliohms maximum.

	<u>Initial</u>	<u>After environment</u>
Center contact:	3.0	4.0
Outer contact:	2.0	Not applicable

Thermal shock: Applicable, test condition A.

Moisture resistance: [Method 106 of MIL-STD-202](#).

No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

RF high potential withstanding voltage:

At a frequency between 5 to 7.5 MHz.

Leakage current – Not applicable.

RF voltage – 670 V rms.

Coupling mechanism retention force: Not applicable.

PIN: M83517/3-(dash number from table I.)

Group qualification: See table II.

MIL-DTL-83517/3A

TABLE II. Group qualification.

Group	Submission and qualification of any of the following connectors <u>1/2/</u> M83517/3-	Qualifies the following connectors M83517/3-
1	3+001	3+001 3+002 3+003 3+004 3+005 3+006 3+007

1/ Individual connectors other than listed are self qualifying only.

2/ Qualification of connectors, qualifies connectors of the same material only.

+ Denotes finish.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to [MIL-C-83517](#), this document references the following:

[MIL-STD-202](#)

[MIL-STD-348](#)

EIA-364-20

EIA-364-21

EIA-364-26

CONCLUDING MATERIAL

Custodians:

Army – CR

Navy – EC

Air Force – 11

DLA - CC

Preparing activity:

DLA – CC

(Project 5935-4608-003)

Review activities:

Army – AR, AT, CR4, MI

Navy – AS, MC, OS, SH

Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.