

IT3200C

1.0 Specification References

Parameter	Description
a. Rakon part number	514543
b. Description	IT3205CE 20.0026 MHz
c. Document ID	IT3200C - 1001



2.0 Absolute Maximum Rating ¹

Parameter	Min.	Max.	Unit
a. Power supply	-0.6	6	V
b. Storage temperature	-40	85	°C

3.0 Frequency Characteristics

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Nominal frequency		20.0026		MHz	
b. Frequency calibration			±1	ppm	Offset from nominal frequency measured at 25°C ±2°C
c. Reflow shift			±1	ppm	Two consecutive reflows as per attached profile after 2 hours relaxation at 25°C
d. Temperature range	-40		85	°C	The operating temperature range over which the frequency stability is measured
e. Frequency stability over temperature			±0.5	ppm	Referenced to the midpoint between minimum and maximum frequency value over the specified temperature range ²
f. Frequency slope			±0.1	ppm/°C	Minimum of one frequency reading every 2°C, over the operating temperature range ²
g. Static temperature hysteresis			0.6	ppm	Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C
h. Sensitivity to supply voltage variations			±0.1	ppm	Supply voltage varied ±5% at 25°C
i. Sensitivity to load variations			±0.2	ppm	±10% load change at 25°C ³
j. Long term stability			±2	ppm	Frequency drift over 1 year at 25°C

4.0 Power Supply

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Supply voltage (V _{DD})		3.0		V	With a tolerance of ±5%
b. Supply current			1.5	mA	At maximum V _{DD} ³

¹ Operating beyond this limit may result in change or permanent damage to the device.

² Parts should be shielded from drafts causing unexpected thermal gradients. Temperature changes due to ambient air currents on the oscillator can lead to short term frequency drift.

³ Specified for load stated in Oscillator Output section at 25°C.

5.0 Oscillator Output

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Output waveform					DC coupled clipped sine-wave ⁴
b. Output voltage level	0.8			V	At minimum supply voltage ³
c. Output load		10		kΩ/pF	10kΩ // 10pF ±10%

6.0 SSB Phase Noise (20.0026 MHz, at 25°C)

Parameter	Typ.	Max.	Unit.	Test Condition / Description
a. 1Hz offset	-62		dBc/Hz	
b. 10Hz offset	-86		dBc/Hz	
c. 100Hz offset	-112		dBc/Hz	
d. 1kHz offset	-135		dBc/Hz	
e. 10kHz offset	-147		dBc/Hz	
f. 100kHz offset	-149		dBc/Hz	

7.0 Marking

Parameter	Test Condition / Description
a. Type	Engraved
b. Line 1	[R], [XXXX] = the last four characters of the Rakon Part Number
c. Line 2	[o] = Pin 1, [XXX] = Internal code, and [XX] = Date code

8.0 Manufacturing Information

Parameter	Test Condition / Description
a. Washing	Able to withstand aqueous washing process
b. Reflow	Solder reflow processes as per profile attached
c. Packaging description	Tape and reel. Standard packing quantity is 3000 units per reel


9.0 Environmental Specification

Parameter	Test Condition / Description
a. RoHS compliant	Yes
b. Shock	Half sine-wave acceleration of 100g peak amplitude for 6ms duration, 3 cycles each plane
c. Moisture resistance	After 48 hours at 85°C ±2°C, 85% relative humidity non-condensing
d. Thermal shock test	Exposed at -40°C for 30 minutes then to 85°C for 30 minutes constantly for a period of 5 days


⁴ External AC-Coupling capacitor required. 1nF or greater recommended.

10.0 Model Outline: IT3200C


MODEL DRAWING

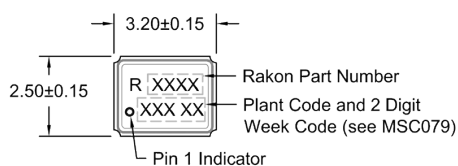

TOP VIEW



FRONT VIEW




BOTTOM VIEW

PIN CONNECTIONS

Pin	IT	IVT
1	GND	VCO
2	NC	NC
3	GND	GND
4	OUTPUT	OUTPUT
5	NC	NC
6	VDD	VDD


RECOMMENDED LAYOUT

- TOP VIEW, 6 PAD

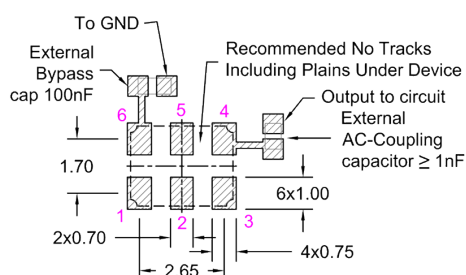

RECOMMENDED LAYOUT

- TOP VIEW, 4 PAD

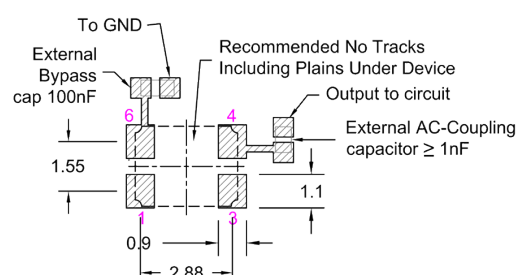

TITLE: I(V)T3200C MODEL

RELATED DRAWINGS:

FILENAME: CAT434

REVISION: G

DATE: 30-Jul-13

SCALE: 5 : 1

Millimetres

TOLERANCES:

XX = ±0.5

X.X = ±0.2

X.XX = ±0.10

X.XXX = ±0.05

X° = ±1.0°


Hole = ±0.10

rakon


© 2013 Rakon Limited

11.0 Test Circuit: IT3200C

IT TEST CIRCUIT:

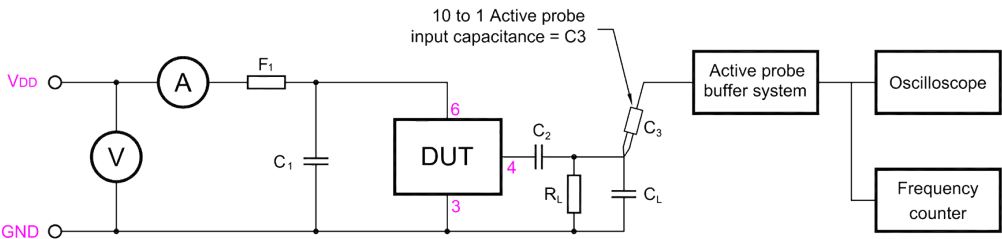

IVT TEST CIRCUIT:

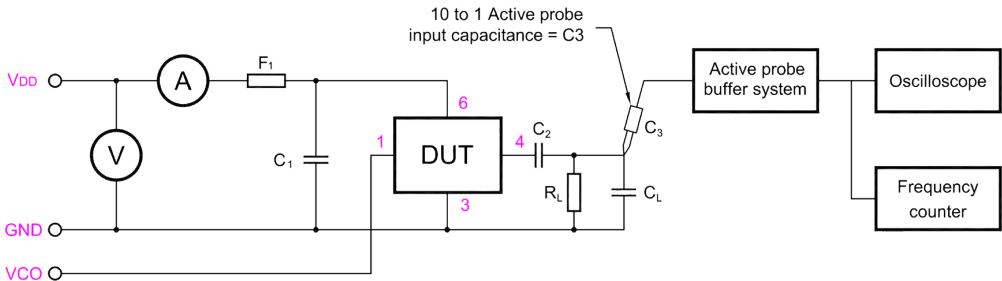

C1: 100nF C2: ≥1nF RL: 10kΩ	CT = CL + C3 (C3 - Oscilloscope probe capacitance) C1 as stated in OSCILLATOR OUTPUT selection F1: A ferrite bead or a resistor between 22Ω ~ 47Ω recommended.
-----------------------------------	--

TITLE: I(V)T3200 SERIES TEST CIRCUIT

RELATED DRAWINGS:

FILENAME: CAT286

REVISION: G

DATE: 29-Jul-13


SCALE: NTS

Millimetres

rakon

© 2013 Rakon Limited

13.0 Reflow: IT3200C

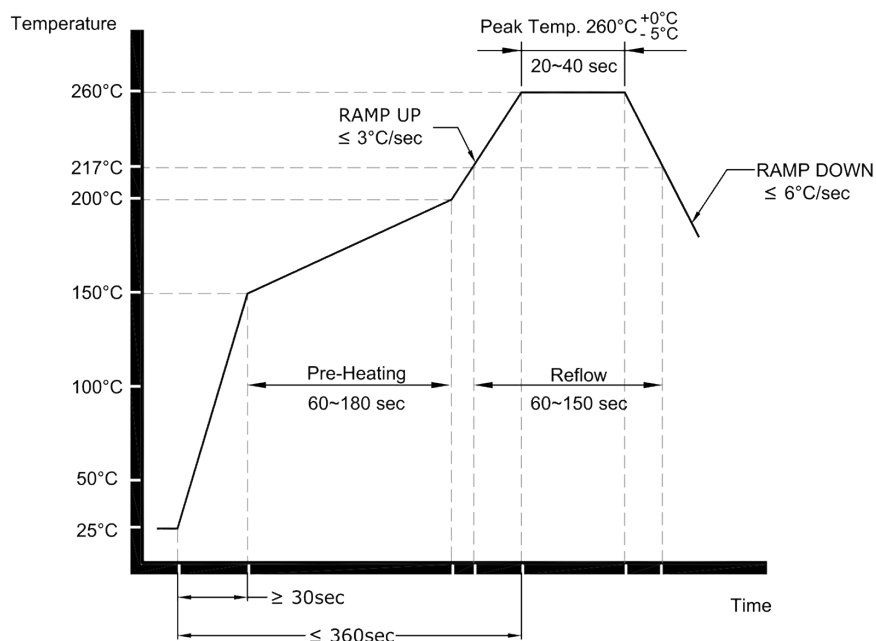

NOTE:

The product has been tested to withstand the Reflow Profile shown. The Reflow Profile used to solder Rakon products is determined by the solder paste Manufacturer's specification. It is recommended that the Reflow Profile used does not exceed the one shown above.

TITLE: Pb-FREE SERIES OSCILLATORS REFLOW

FILENAME: CAT541

RELATED DRAWINGS:

REVISION: B

DATE: 05-Sep-11

SCALE: NTS

Millimetres

rakon

© 2013 Rakon Limited

14.0 Specification History

Version	Notes	Approver	Date
1.0	Specification created	Sowmya Injeti	20 Mar 2015