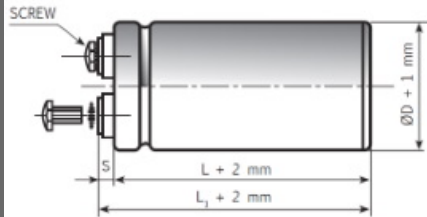

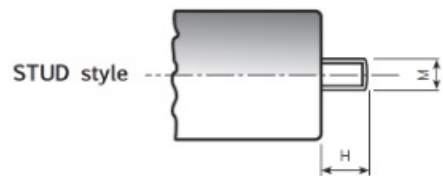



Diagram of dimensions (unit = mm)						76X143 (ØD x L)	
ØD	d	P	M	H	SCREW		
35	11	12.7	M8	12	5MA x 9.5		
51	18.5	22.2	M12	16	5MA x 9.5		
63	18.5	28.6	M12	16	5MA x 9.5		
76	18.5	31.8	M12	16	5MA x 9.5		
	23.2	31.8	M12		6MA x 10		
90	23.2	31.8	M12	16	6MA x 10		
L1	L1 = L + 2.5mm L1 toll. -0+3mm			L1 = L + 4.5 mm L1 toll. -1 + 3 mm			
S	M5 = 5 -0+1mm from top of deck			M6 = 7 -1+1mm from top of deck			
Marking							
Type - Identification Code Lot							
Rated capacitance (µF), Rated voltage (Vdc)							
Negative polarity: gold row							
Product compliant RoHS Directive							

ELECTRICAL PARAMETERS

Nominal Capacitance	4700	µF at 100 Hz
Tolerance Standard	M	= -20% +20% on request Q = -10% +30%
Temperature Range		-40°C to 85°C
Rated Voltage / Surge Voltage	450/495	VDC
Max Tang δ	0.15	at 100 Hz
Typical ESR	32	mΩ at 100 Hz
Typical Impedance Z	30	mΩ at 10 kHz
Maximum Leakage Current	6.00	mA after 5 mins at 20°C
Maximum Ripple Current	15.00	A rms at 85°C
Useful Life	> 12000	hours at 85°C for Vr<=100V and for Vr>=500V
Useful Life	> 15000	hours at 85°C for 100V < Vr < 500V
Reference Standards	CECC 30.300 IEC 384.4 Long Life Grade	

When ambient temperature and ripple frequency are different from 85°C and 100 Hz, ripple current shall be multiplied by the following compensating factor:

FREQUENCY	50 Hz	100 Hz	500 Hz	1000 Hz	> 10 kHz	TEMPERATURE	35°C	45°C	55°C	65°C	75°C	85°C	95°C
FACTOR	0.8	1.0	1.2	1.3	1.5	FACTOR	2.2	2.1	1.8	1.6	1.4	1.0	0.5