






OCTIS RECEPTACLE KIT COMBO POWER/SIGNAL

PAGE 1/4 ISSUE 31-01-19A SERIES OCTIS PART NUMBER OCTI507500

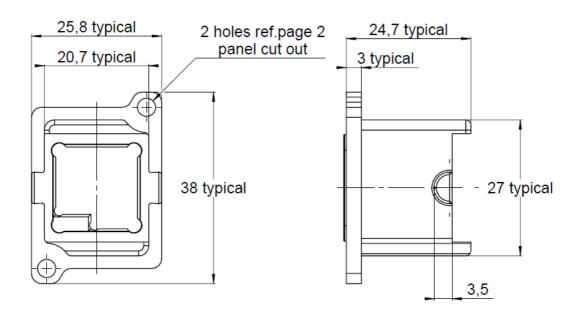

# **Packing configuration**





All dimensions are in mm. Tolerances according ISO 2768 m-H

## **DESCRIPTION**

REP	COMPONENT	MATERIALS	PLATING
1	Screwable Receptacle Body	ALUMINIUM	CHEMICAL PASSIVATION
2	Panel Sealing Gasket	SILICONE	-





OCTIS RECEPTACLE KIT COMBO POWER/SIGNAL


PAGE <b>2/4</b>	ISSUE <b>31-01-19A</b>	SERIES OCTIS	PART NUMBER OCTI507500
-----------------	------------------------	--------------	------------------------

#### **GENERAL CHARACTERISTICS**

Mechanical  Mating endurance (cycles)  Vibration  Weight (g)	IEC 61300-2-2 IEC 61300-2-1	100 - 6,9490
Environmental Protection class Operating temperature (°C) Storage temperature (°C) Salt Mist  RoHS Flammability UVB Resist	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154 cycle 2	IP67 * -40 / +85 -65 / +85 720h *  Compliant V0 1000
Others: Packaging	-	Hot formed Trays in card board box 20 pcs by tray

<sup>\*</sup> When mated with corresponding Radiall OCTIS plug

## PANEL CUT OUT

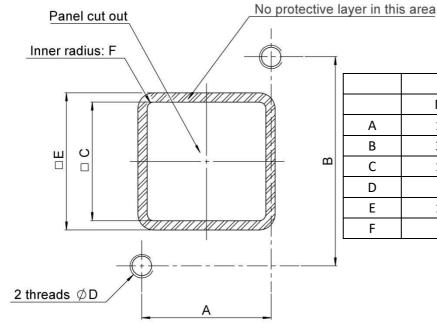

	mm		
	Min.	Max.	
Α	19.7	19.9	
В	31.9	32.1	
С	16.5	16.8	
D	M3	-	
E	19.5	20	
F	-	0.5	




# **Technical Data Sheet**


OCTIS RECEPTACLE KIT COMBO POWER/SIGNAL

PAGE 3/4 ISSUE 31-01-19A SERIES OCTIS PART NUMBER OCTI507500

#### **PACKAGING:**

## Packaging in Hot Formed Tray

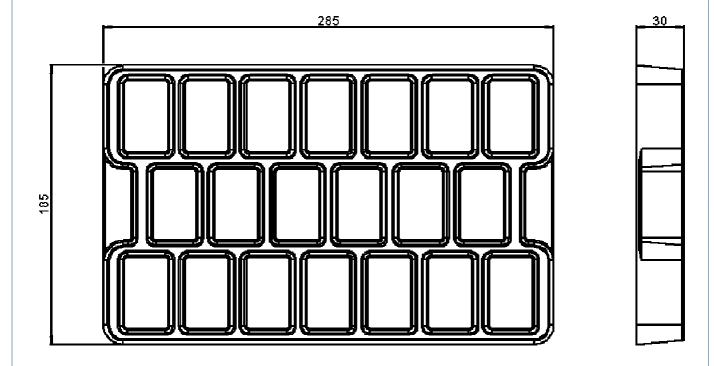

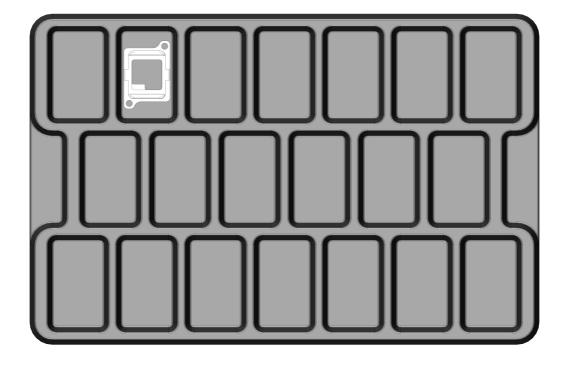





OCTIS RECEPTACLE KIT COMBO POWER/SIGNAL

