
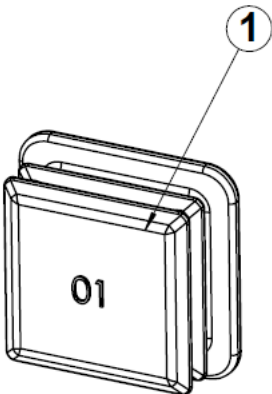

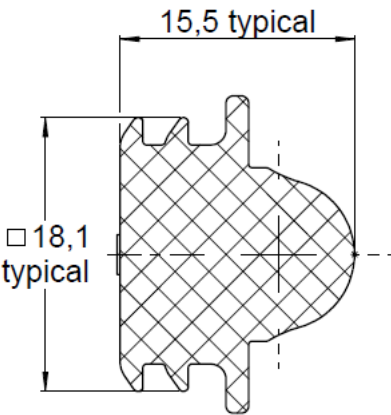


PAGE 1/3	ISSUE 14-02-19A	SERIES OCTIS	PART NUMBER OCTI955500
----------	-----------------	--------------	------------------------

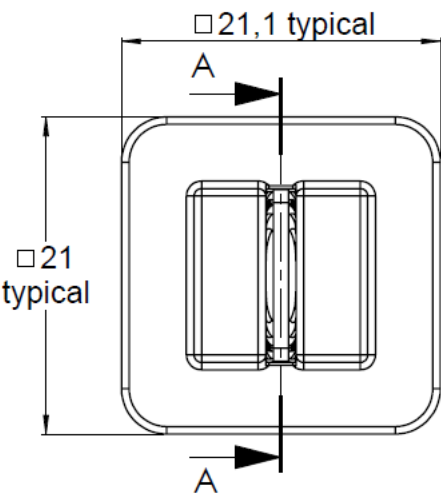

All dimensions are in mm. Tolerances according ISO 2768 m-H

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	DUST CAP	SILICONE	-

PAGE 2/3

ISSUE 14-02-19A

SERIES OCTIS

PART NUMBER OCTI955500


GENERAL CHARACTERISTICS

Mechanical Mating endurance (cycles) Axial Tensile load (N typical) Vibration Weight (g)	IEC 61300-2-2 IEC 61300-2-4 IEC 61300-2-1 -	10 Not Applicable - 2,0500
Environmental Protection class Operating temperature (°C) Storage temperature (°C) Salt Mist RoHS Flammability UVB Resist	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-19 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154	IP64 * -40 / +85 -65 / +85 5 / 95 720h * Compliant V0 Compliant
Others Equipment interface Packaging	- -	For use with standard 26 OR 35 OCTIS panel interface or receptacle** In bulk in plastic bag

* Mated condition

** If the interface is to be die casted into the equipment panel, please contact Radiall for license conditions and interface definition

INSTALLATION (example for "26mm" receptacle)

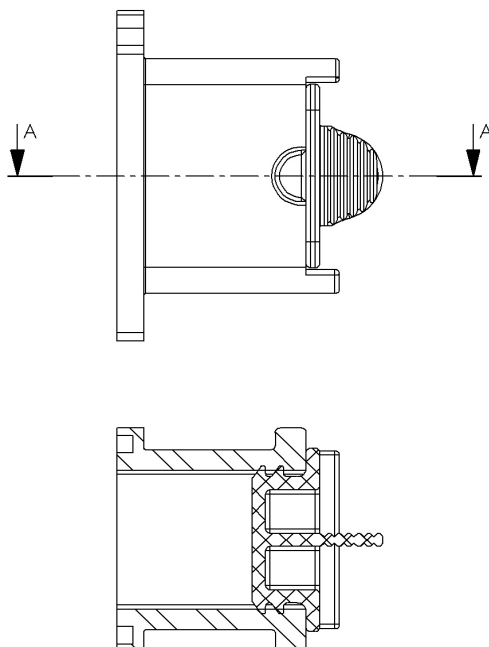

PAGE 3/3

ISSUE 14-02-19A

SERIES OCTIS

PART NUMBER OCTI955500

