




+ CONNECTORS
RF CONNECTORS

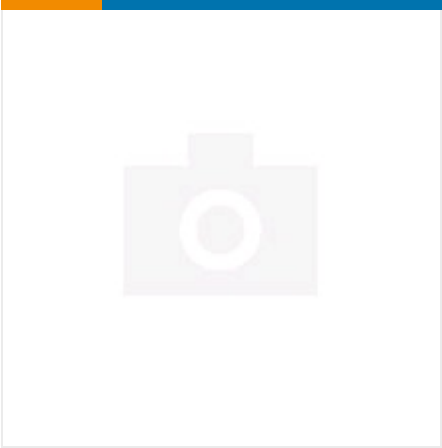

✓ Active

TE CONNECTIVITY (TE)
TNC Str Plg MC 50Ohm Nickel Pltd RG58C/U
[Miniature Coax](#) | [TE-MC](#) , [U](#)

1-1337612-0
TE Internal Number: 1-1337612-0

[EU RoHS Compliant with Exemptions](#)
[EU ELV Compliant with Exemptions](#)

Connector Interface TNC
Connector Style Plug
Mated Outer Diameter (Approximate) 16.256 mm [.64 in]
Impedance (Ω) 50

Cable Type Belden 9907, KX 15, Raychem 5019D3318, Raychem 5021D1331, Raychem 5021D1831, Raychem 5021M1631, Raychem EPD 60470Q, Raychem EPD 64319Q, RG 141A, RG 58C, URM 43, URM 76

 **PRODUCT DRAWING**
[English](#)

DOCUMENTATION

Product Drawings

TNC STRAIGHT PLUG MIL-CLAMP 50 OHM RG58C/U, 141A/U, URM43, 76 & BELDEN 9907, KX15
PDF (TIFF AVAILABLE)
English

FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.
Please Note: Use the Product Drawing for all design activity.

Product Type Features

Connector Interface TNC
Connector Style Plug
Connector & Contact Terminates To Wire & Cable

Electrical Characteristics

Impedance (Ω) 50

Body Features

Cable Connector Orientation Straight
Body Material Brass
Body Plating Material Nickel

Contact Features

Center Contact Plating Material Gold
Center Contact Material Brass

Termination Features

Termination Method to Wire & Cable MIL-Clamp

Dimensions

Mated Outer Diameter (Approximate) 16.256 mm [.64 in]
Flats Dimension 9.5 A/F

Usage Conditions

Cable Type Belden 9907, KX 15, Raychem 5019D3318, Raychem 5021D1331, Raychem 5021D1831, Raychem 5021M1631, Raychem EPD 60470Q, Raychem EPD 64319Q, RG 141A, RG 58C, URM 43, URM 76

Packaging Features

Packaging Method Box
Packaging Quantity 50

Other

Dielectric Material PTFE
Gasket Material White Silicone Rubber
Coupling Nut Material Brass
Grade Professional

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance
PDF

