




+ CONNECTORS
RF CONNECTORS

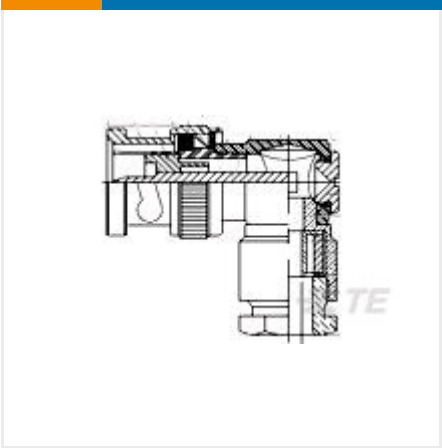

✓ Active

TE CONNECTIVITY (TE)
BNC R/A Plg WL 50Ohm Silver Pltd RG174A/
[Miniature Coax](#) | [PKG](#) , [PRG](#)

1-1478127-0
TE Internal Number: 1-1478127-0

[EU RoHS Compliant with Exemptions](#)
[EU ELV Compliant with Exemptions](#)

Connector Interface BNC

Connector Style Plug

Mated Outer Diameter (Approximate) 14.529 mm [.572 in]

Impedance (Ω) 50

Cable Type KX 22A, KX 3B, Raychem 5026A1318, Raychem 5026A1331, Raychem 5026A1631, Raychem 5026C1309, Raychem 5026D1028, Raychem 5026D1424, RG 174A, RG 188A, RG 316, URM 95

 **PRODUCT DRAWING**
[English](#)

DOCUMENTATION

Product Drawings

BNC ELBOW WEDGE CLAMP PLUG 50 OHM RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A

PDF (TIFF AVAILABLE)

English

FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Connector Interface BNC
Connector Style Plug
Sealable No
Connector & Contact Terminates To Wire & Cable

Configuration Features
Number of Positions 1

Electrical Characteristics
Impedance (Ω) 50

Body Features
Cable Connector Orientation Right Angle
Body Material Brass
Body Plating Material Silver
Body Insulation With

Contact Features
Center Contact Plating Material Silver
Center Contact Material Brass

Termination Features
Termination Method to Wire & Cable Wedge-Lock

Dimensions
Mated Outer Diameter (Approximate) 14.529 mm [.572 in]

Usage Conditions
Cable Type KX 22A, KX 3B, Raychem 5026A1318, Raychem 5026A1331, Raychem 5026A1631, Raychem 5026C1309, Raychem 5026D1028, Raychem 5026D1424, RG 174A, RG 188A, RG 316, URM 95

Operation/Application
Operating Frequency (GHz) 4

Packaging Features
Packaging Method Box
Packaging Quantity 50

Other
Dielectric Material PTFE
Gasket Material Silicone Rubber
Coupling Nut Material Brass
Grade Professional

Statement of Compliance

Statement of Compliance

PDF
