




+ CONNECTORS
RF CONNECTORS

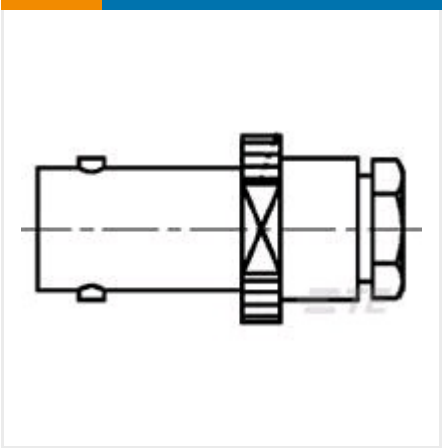

✓ Active

TE CONNECTIVITY (TE)
BNC Str Jk PS 75Ohm Silver Pltd RG59B/U,
Miniature Coax | STA , U

1-1478411-0
TE Internal Number: 1-1478411-0

EU RoHS Compliant with Exemptions
EU ELV Compliant with Exemptions

Connector Interface BNC

Connector Style Jack

Mated Outer Diameter (Approximate) 14.529 mm [.572 in]

Impedance (Ω) 75

Cable Type PSF 1/3M, Raychem 9524A1311, Raychem 9524A1811, RG 140, RG 210, RG 59B, RG 62A, URM 90

DOCUMENTATION

Product Drawings

BNC STRAIGHT JACK SOLDER (PS) 59U 75 Ohm

TIF
English

Instruction Sheets

Instruction Sheet (non U.S.)

GREENPAR RF CONNECTOR CABLE ASSEMBLY INSTRUCTION SHEET

PDF
English

GREENPAR RF CONNECTOR CABLE ASSEMBLY INSTRUCTION SHEET

TIF
English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features

- Connector Interface** BNC
- Connector Style** Jack
- Sealable** No
- Connector & Contact Terminates To** Wire & Cable

Configuration Features

- Number of Positions** 1

Electrical Characteristics

- Impedance (Ω)** 75

Body Features

- Cable Connector Orientation** Straight
- Body Material** Brass
- Body Plating Material** Silver

Contact Features

- Center Contact Plating Material** Silver
- Center Contact Material** Brass

Termination Features

- Termination Method to Wire & Cable** Solder/Clamp

Dimensions

- Mated Outer Diameter (Approximate)** 14.529 mm [.572 in]

Usage Conditions

- Cable Type** PSF 1/3M, Raychem 9524A1311, Raychem 9524A1811, RG 140, RG 210, RG 59B, RG 62A, URM 90

Operation/Application

- Operating Frequency (GHz)** 2

Packaging Features

- Packaging Method** Box
- Packaging Quantity** 50

Other

- Dielectric Material** PTFE
- Gasket Material** Silicone Rubber
- Grade** Professional



Statement of Compliance

Statement of Compliance

PDF
