



Have a Question?  
Chat with a Product  
Information Specialist



My Cart |



My Part Lists |



Sign In/Register



English (

Change)

What can we help you find?



Products

Industries

Resources

About TE

My Account

Innovation

Support Center


Home > Products > RF & Coax > Product Feature Selector > Product Details

## 1057154-1 Product Details

Share

Print

Email

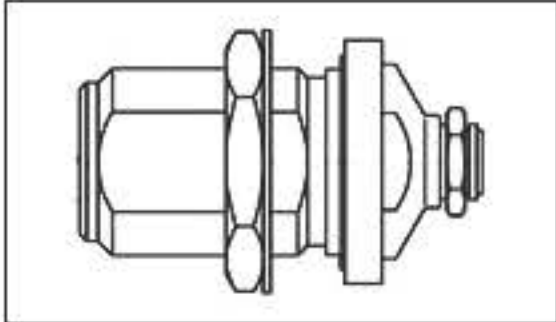

1057154-1

TE Internal Number: 1057154-1

Active

### N Series RF Connectors



Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Connector - RF
- Jack
- Coaxial Cable Termination Type = Solder
- Applies To Cable
- Coaxial Cable Type (RG/U or Mfg.) = 402 Semi-Rigid/3.58 [.141]

View all Features

#### Quick Links

- Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product



Add to My Part List



Request Sample



Find Similar Products



Buy Product

#### Documentation & Additional Information

##### Product Drawings:

- Title not available for initial StarTEC data load (PDF, English)

##### Catalog Pages/Data Sheets:

- None Available

##### Product Specifications:

- None Available

##### Application Specifications:

- None Available

##### Instruction Sheets:

- OSN Bulkhead Feedthrough Cable Jack Solder Clamp Att... (PDF, English)

##### CAD Files:

- None Available

##### Related Products:

- Tooling

List all Documents

#### Product Features (Please use the Product Drawing for all design activity)

##### Product Type Features:

- Product Type = Connector - RF
- Gender = Jack
- Wire/Cable Type = Coaxial Cable
- Grade = Commercial
- Lightning/EMP Protection = None
- Dielectric Material = PTFE Fluorocarbon
- Weatherproof = No

##### Mechanical Attachment:

- Panel Mount Retention = With
- Panel Mount Retention Type = Bulkhead
- Panel Attachment Style = Rear Mount

##### Electrical Characteristics:

- Frequency = DC - 11 GHz
- Connector Impedance ( $\Omega$ ) = 50
- Insulation Resistance (M $\Omega$ ) = 10,000

##### Termination Features:

- Coaxial Cable Termination Type = Solder

##### Dimensions:

- Panel Thickness (mm [in]) = 6.35 [0.250]

##### Body Features:

- Body Style = Straight
- Body Plating = Passivated
- Body Material = Stainless Steel
- Gasket Material = Silicone Rubber
- Retaining Ring Material = Beryllium Copper

##### Contact Features:

- Captured Center Contact = Without
- Center Contact Plating = Gold

##### Configuration Features:

- Coaxial Cable Type (RG/U or Mfg.) = 402 Semi-Rigid/3.58 [.141]

##### Industry Standards:

- Government/Industry Qualification = No
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

##### Conditions for Usage:

- Applies To = Cable

##### Other:

- Brand = AMP

#### Corporate Information

About TE

Investors

News Room

Supplier Portal

Careers

Terms & Conditions

Privacy Policy

#### Quick Links

Distributor Inventory

Product Cross Reference

Documents & Drawings

Product Compliance Support Center

Site Map

#### Customer Support

Email or Chat With Us

Find a Phone Number

Knowledge Base

Manage Your Account

#### Keep Me Informed

