

MHT1803A: 1.8-50 MHz, 300 W CW, 50 V RF LDMOS Transistor for Consumer and Commercial Cooking

[FOLLOW](#)[OVERVIEW](#)[DOCUMENTATION](#)[BUY/PARAMETRICS](#)[PACKAGE/QUALITY](#)

Jump To

[Overview & Features](#)[Key Parametrics](#)[RF Performance Tables](#)

Overview

The MHT1803A 300 W CW high efficiency RF power transistor is designed for consumer and commercial cooking applications operating from 1.8 to 50 MHz.

Features


- Characterized from 30 to 50 V
- Integrated ESD protection with greater negative gate-source voltage range for improved Class C operation
- 150°C case operating temperature
- 175°C die temperature capability
- RoHS compliant

Target Applications

- Consumer cooking
- Commercial cooking

[DATA SHEETS](#)[APPLICATION NOTES](#)[BUY](#)

TO-247-3 Package Image

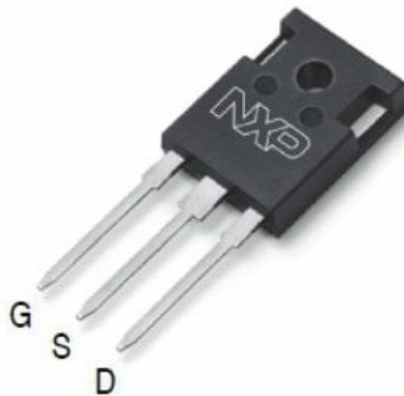

Key Parametrics

Frequency (Min) (MHz)

1.8

Frequency (Max) (MHz)

50

Supply Voltage (Typ) (V)

50

Output Power (Typ) (W) @ Intermodulation Level at Test Signal

CW @ 300

Power Gain (Typ) (dB) @ f (MHz)

41 @ 28.2

Efficiency (Typ) (%)

79

Thermal Resistance (Spec) (°C/W)

0.55

Class

AB

Die Technology

LDMOS

RF Performance Tables

Typical Performance

$V_{DD} = 50 \text{ Vdc}$, $I_{DQ} = 50 \text{ mA}$

Frequency (MHz)	Signal Type	P _{out} (W)	G _{ps} (dB)	η _D (%)
40.68	CW	330	28.2	79.0

Load Mismatch/Ruggedness

Frequency (MHz)	Signal Type	VSWR	P _{in} (W)	Test Voltage	Result
40.68	Pulse (100 μsec, 20% Duty Cycle)	> 65:1 at all Phase Angles	2 Peak (3 dB Overdrive)	50	No Device Degradat

News 1 Jul 2020 | NXP Semiconductors Announces Conference Call to Review Second Quarter 2020 Financial Results [Read More](#)



[ABOUT NXP](#) [CAREERS](#) [INVESTORS](#) [MEDIA](#) [CONTACT](#) [SUBSCRIBE](#)



[Privacy](#) | [Terms of Use](#) | [Terms of Sale](#) | [Slavery and Human Trafficking Statement](#) | [Accessibility](#)

©2006-2020 NXP Semiconductors. All rights reserved.