


SMA Connectors

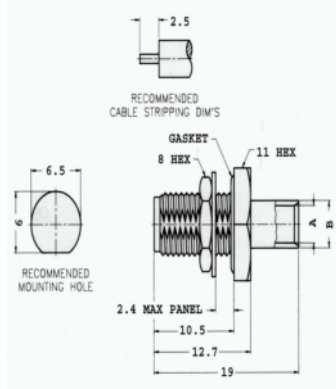

Direct Solder For Semi-Rigid Cable


Bulkhead Feed-through Cable Jack

Cable "A": .085 (A1=2.2 Min. B1=3.0 Min.

Cable "B": .141 A2=3.6 Min. B2=4.6 Min.

P/N: 921A704A (.085)

P/N: 921A704B (.141)

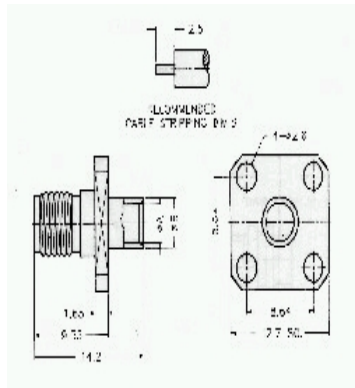

Direct Solder For Semi-Rigid Cable


Bulkhead Feedthrough Cable Jack

Cable "A": .085 A1=2.2 Min. B1=3.0 Min.

Cable "B": .141 A2=3.6 Min. B2=4.6 Min.

P/N: 917A704A (.085)

P/N: 917A704B (.141)

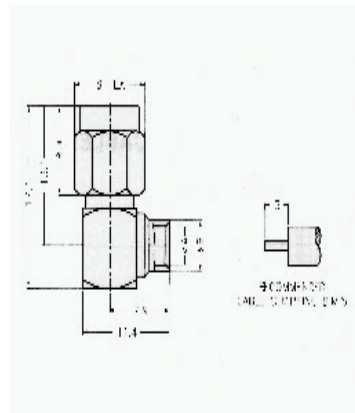

Direct Solder For Semi-Rigid Cable



Panel Mount 2 Hole Flange Cable Jack

Cable "A": .085" A1=2.2 Min. B1=3.0 Min.

Cable "B": .141" A2=3.6 Min. B2=4.6 Min

P/N: 917B704A (.085)

P/N: 917B704B (.141)

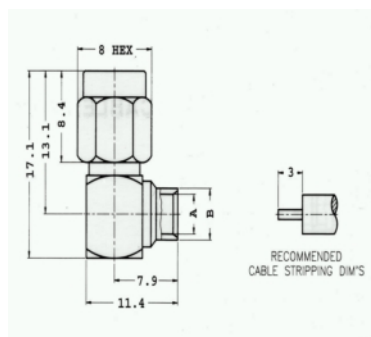

Direct Solder For Semi-Rigid Cable

Right Angle Cable Plug

Cable "A":.085" A1=2.2 Min,B1=3.0 Min.

Cable "B": .141" B2=3.6 Min. B2=4.6 Min

P/N: 913A704A (.085)

P/N: 913A704B (.141)