



STRAIGHT PLUG CRIMP TYPE**R139.084.000****CABLE 6/75**

Series : DT-F

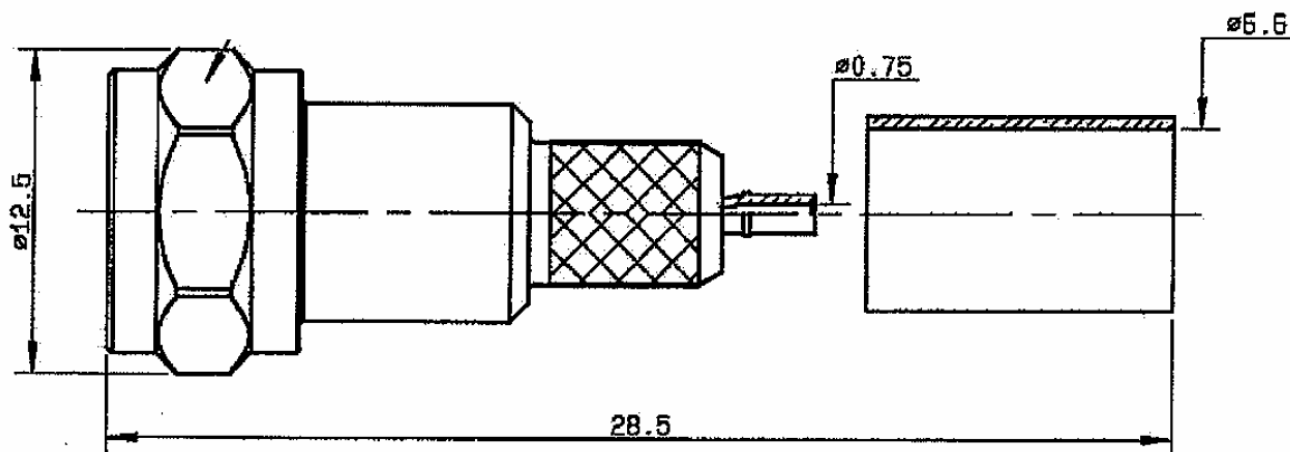

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	NICKEL
CENTER CONTACT	BRASS	GOLD OVER NICKEL
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	-	-
OTHERS PARTS	BRASS	NICKEL
-	-	-
-	-	-

Issue : 1129 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

STRAIGHT PLUG CRIMP TYPE**CABLE 6/75****R139.084.000**Series : **DT-F****PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	75	Ω
Frequency	0-2	GHz
VSWR	TBD + 0,0000	x F(GHz) Maxi
Insertion loss	TBD	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (TBD	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini

Recommended torque	
Mating	TBD N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0,0000 mm

Mating life	0 Cycles mini
Weight	3,8900 g

ENVIRONMENTAL

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	4,00	8,00	14,0	0,00	10,0	0,00

Assembly instruction : **Crimp 02**

Recommended cable(s)

KX 6A

RG 59

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	340 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.223.000	CRIMPING TOOL	
R282.235.011	CRIMPING DIES M22520/5-11	
R282.293.000	CRIMPING TOOL M22520/5-01	

OTHER CHARACTERISTICS

-

Issue : 1129 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 