

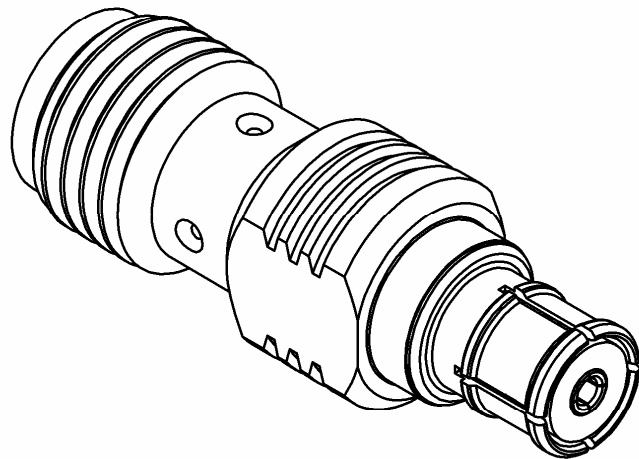



SMA FEMALE - SMP-MAX FEMALE
STRAIGHT ADAPTER
R191.553.010

Série : ADAPTER

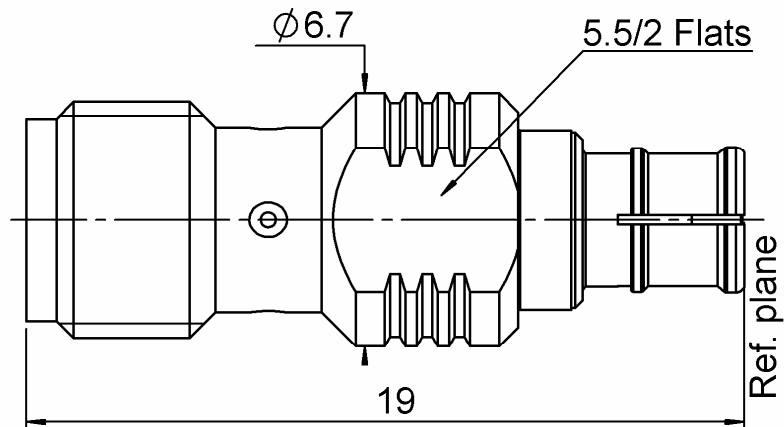

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	NPGR
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT	BERYLLIUM COPPER	NPGR
INSULATOR	PTFE	
GASKET		
OTHERS PARTS		
-	-	-
-	-	-

Issue : 1206 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 

SMA FEMALE - SMP-MAX FEMALE**R191.553.010****STRAIGHT ADAPTER**Série : **ADAPTER****PACKAGING**

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.03 + 0,0300	x F(GHz) Maxi
Insertion loss	0.05	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating	-55/+125	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	18 N mini
Axial force – Opposite end	18 N mini
Torque	NA N.cm mini

Recommended torque

Mating	SMA-COM	0 N.cm
	SMP-MAX	0 N.cm
		0 N.cm
Panel nut	NA	N.cm

Mating life	100 Cycles mini
Weight	2,1650 g

OTHER CHARACTERISTICSIssue : **1206** **A**

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 