


UNIVERSAL 2 HOLES FLANGE JACK RECEPTACLE FOR AXIS 0.3 MM

R327.465.000

Series : 2.4MM

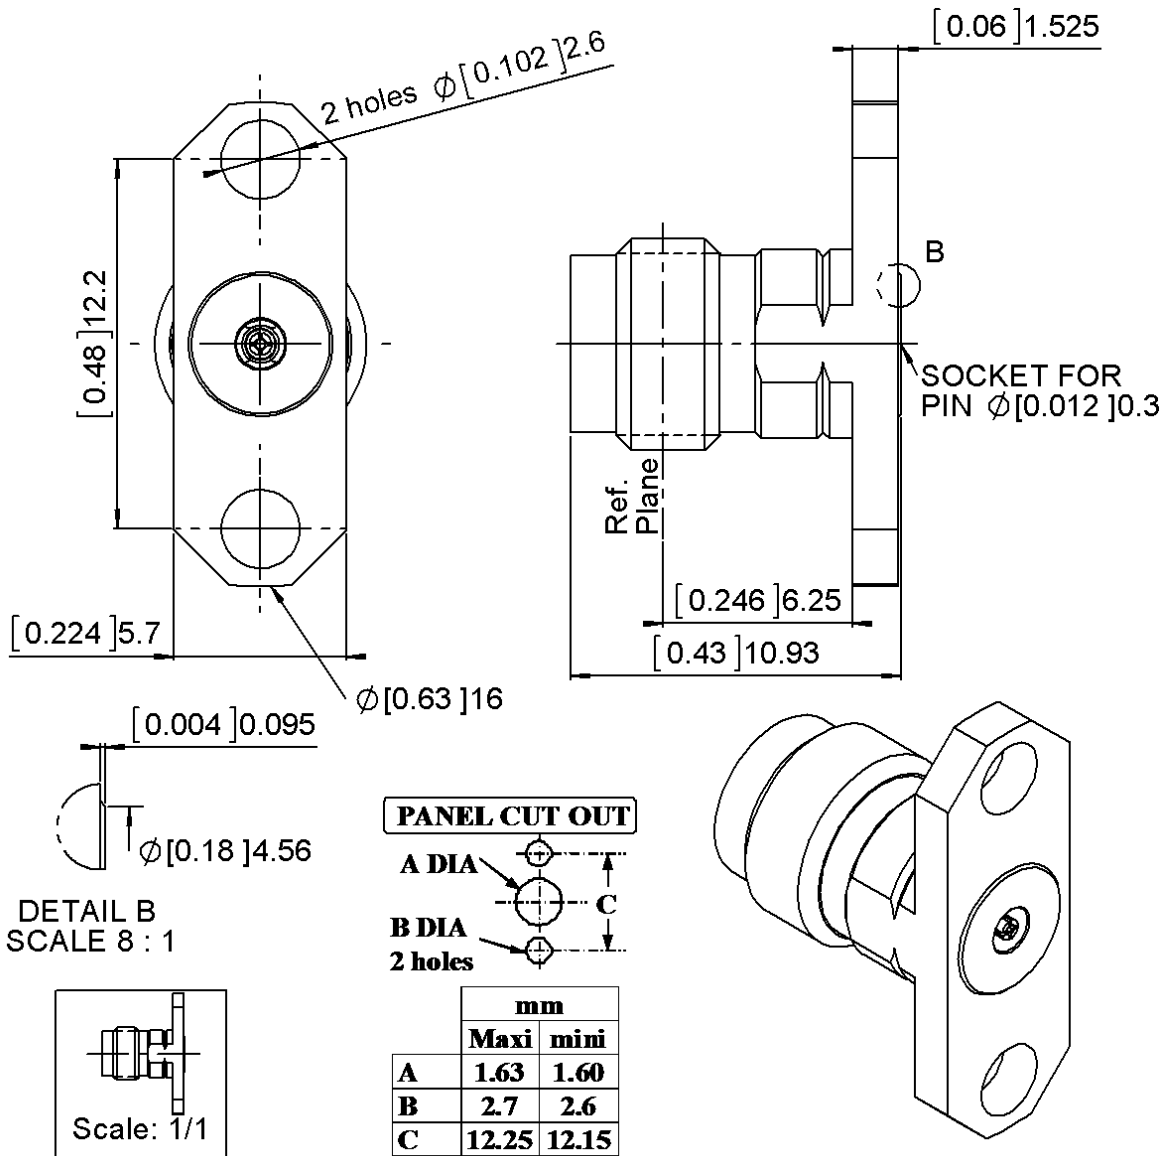

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (μ m)
BODY	BERYLLIUM COPPER	GOLD 0.8 OVER COPPER 2.5
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	BRASS.	GOLD 0.8 OVER COPPER 2.5
INSULATOR	PEEK	
GASKET		
OTHERS PARTS		
-	-	-
-	-	-

Issue : 1351 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

UNIVERSAL 2 HOLES FLANGE JACK RECEPTACLE**FOR AXIS 0.3 MM****R327.465.000**

Series : 2.4MM

PACKAGING

Standard	Unit	Other
1	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-50	GHz
VSWR	1.05 + 0,0040	x F(GHz) Maxi
Insertion loss	0.04	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (100*	- F(GHz)) dB Maxi
Voltage rating	250	Veff Maxi
Dielectric withstanding voltage	500	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating temperature	-65/+165	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHER CHARACTERISTICS

Assembly instruction

Others :

*RF leakage at 1 GHz

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	0,5600 g

Issue : 1351 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


RADIALL