


CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220 FULL LOAD, +25°C													
		-55°C TO +85°C		-55°C TO +125°C			DC	AC		14	30	50	75	100	150	300	500	1	10	100	1	10	
		AC	DC	AC	DC					KHz	KHz	KHz	KHz	KHz	KHz	KHz	KHz	MHz	MHz	MHz	GHz	GHz	
SOLDER	15	125	200	125	150	0.005	--	--	0.50	--	--	14	--	19	23	28	--	39	50	--	70	--	

PART MARKING:
SCI
54-370-006
DATE CODE

PACKAGE MARKING:

STANDARD

MARKING NOTES:
N/A

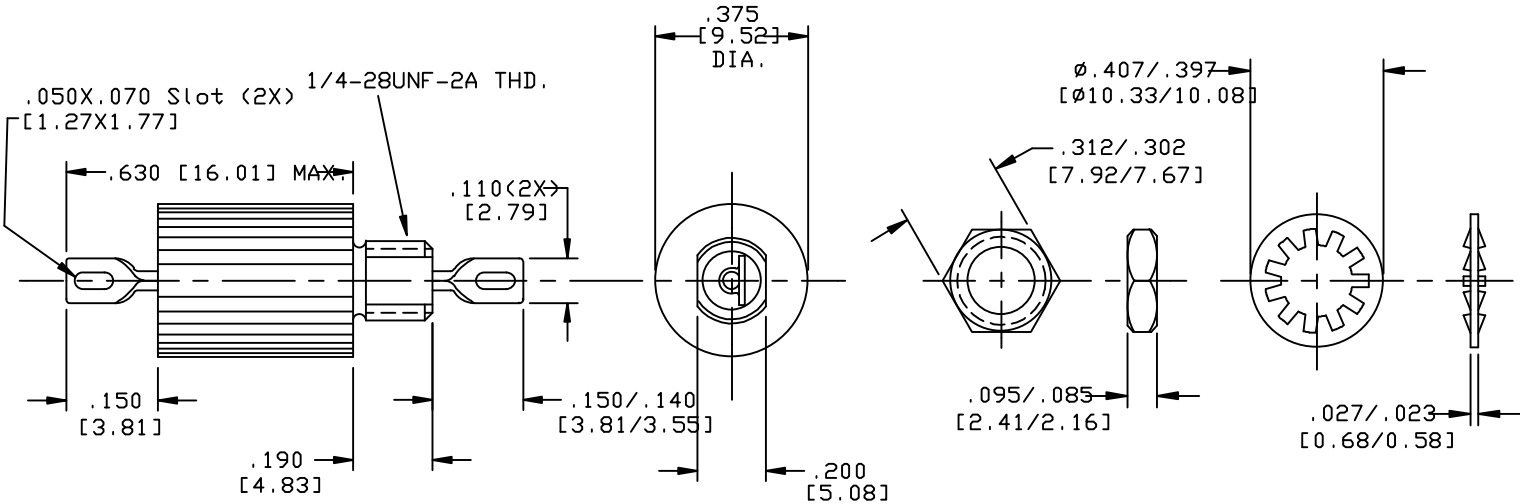

NOTES:
1) MOUNTING TORQUE NOT TO EXCEED 7in-lbs.

																				46	5	3
																				CN 185822	CN 183722	CN 178908
																				CHANGE NOTICE		
																				REV. NO.		
																				UNLESS OTHERWISE SPECIFIED		
																				TOLERANCES UNLESS OTHERWISE SPECIFIED		
																				Fractions		
																				Dec. .xx±		
																				Dec. .xxx±010		
																				Angles ±0° 30'		
																				CODE IDENT. NO.		
																				DLSP2		
																				Sheet 1 of 1		
																				ERIE, FAIRVIEW PENNSYLVANIA		
																				Description		
																				EMI Filter		
																				54-370-006		

Quality Products From The Specialists In Electro-Magnetic Compatibility