



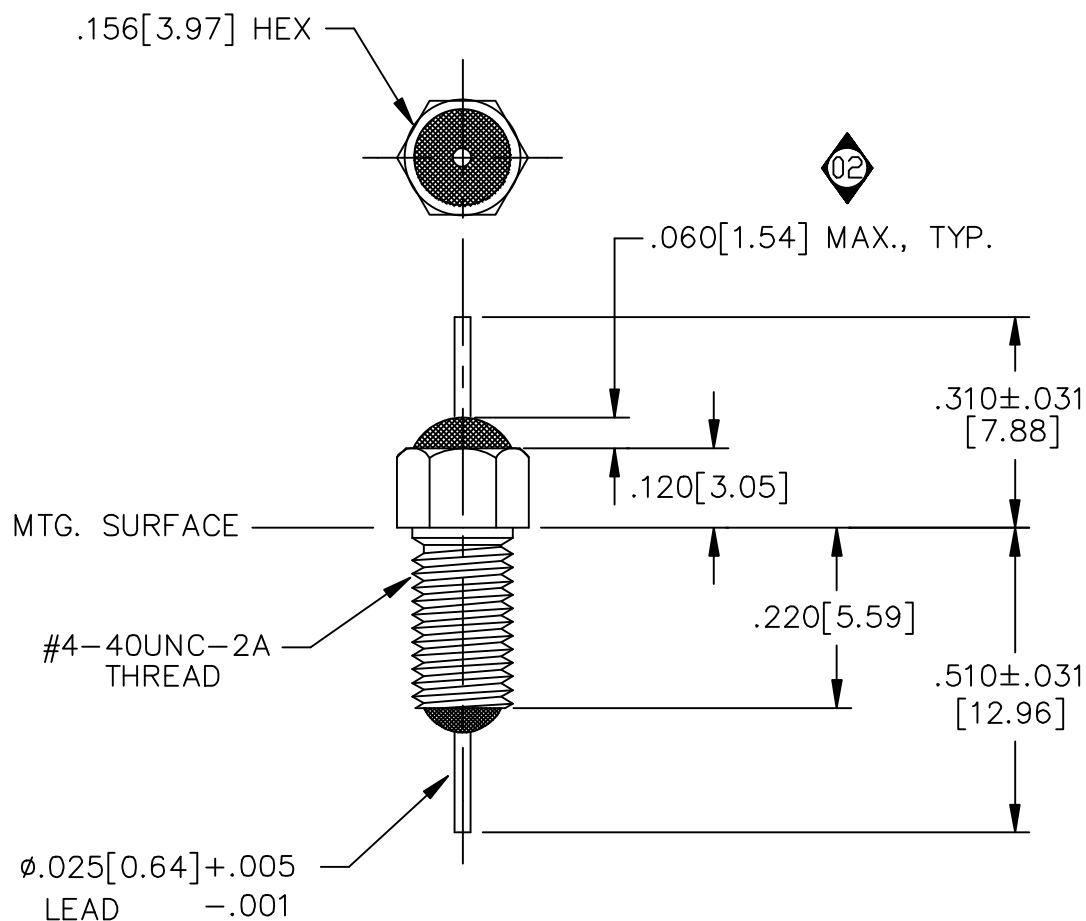

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	100 ±20%
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	-55°C TO 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	--
100	--
1 GHz	--



MARKING:

PART: S101M
 BAG: SCI 54-790-001-X5F101M
 DATE CODE
 LOT#
 QTY/BAG (200 MAX.)

NOTES:

1. MAXIMUM MOUNTING TORQUE = 1.5lb-in.
2. HARDWARE IS INCLUDED.

	02	01	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 FAIRVIEW PENNSYLVANIA SPECTRUM CONTROL INC.
	CN 18055-CPD	C.N. 211231	C.N. 185031	CHANGE NOTICE	Fractions ± 1/64	
					Dec. .xx±	Dwn. M WOJTECKI
					Dec. .xxx±.010	Date 3-18-05
					Angles ±0° 30'	Engr. T. TAYLOR
					CODE IDENT. NO. DLSP2	Scale NONE
						Description FEED THRU RESIN SEAL FILTER
						54790001X5F101M