

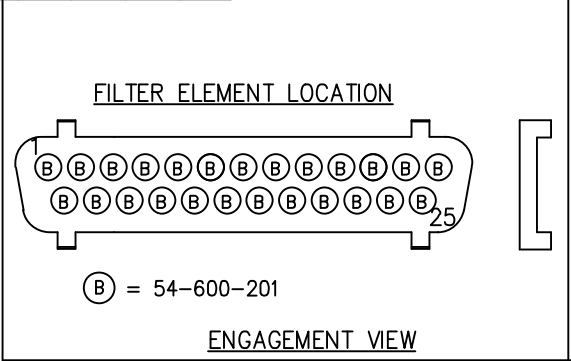
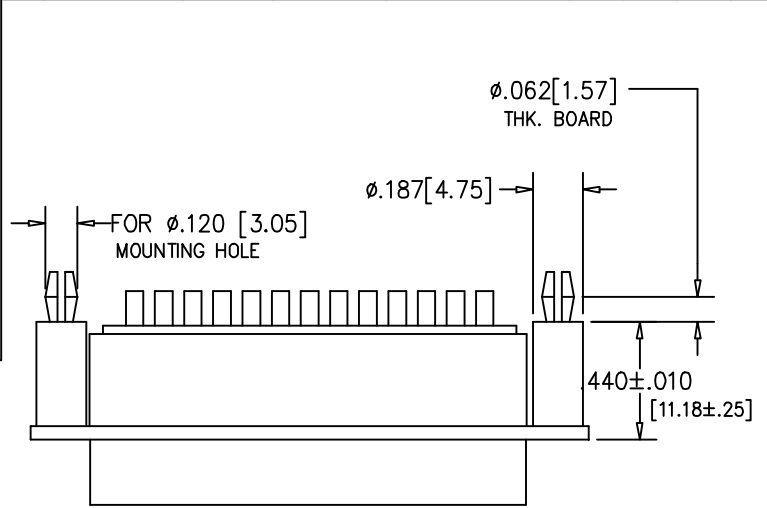
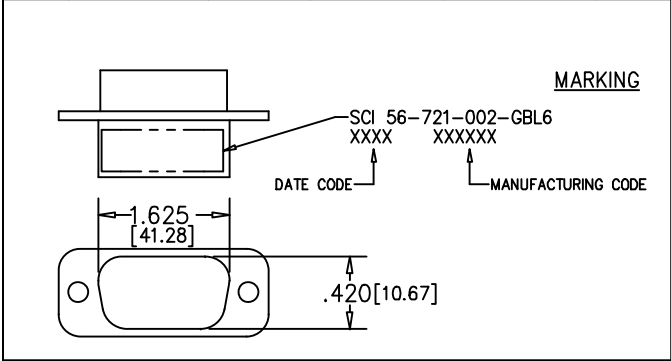


CONN SIZE	FILTER DESIGNATION	FILTER CIRCUITS	CAPACITANCE		3 dB MAX CUTOFF FREQ (MHz)	DIELECTRIC WITHSTANDING VOLTAGE	CONTACT RATING	CONTACT RESIST	WORKING VOLTAGE DC -55°C TO +125°C	MINIMUM INSERTION LOSS-DECIBELS (dB)							
			VALUE	TOLERANCE						5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
25	B	FT	1000pF	+100% -0%	3.2	600V	5A	010 OHM MAX	200V	-	5	10	17	23	30	37	43

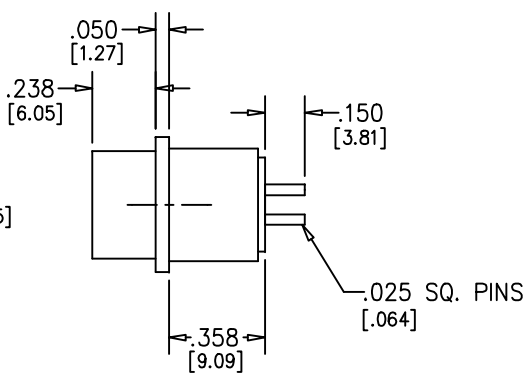

- NOTES:
1. SHELL: NICKEL PLATED ZINC
 2. INSULATORS: UL94V-0
 3. CONTACTS: COPPER ALLOY: .000015 GOLD IN PIN CONTACT MATING AREAS
 4. RADIO FREQUENCY GROUND CONTACT FROM THE CONNECTOR SHELL TO THE MATING CONNECTOR IS ASSURED BY A COAXIAL SPRING CLIP

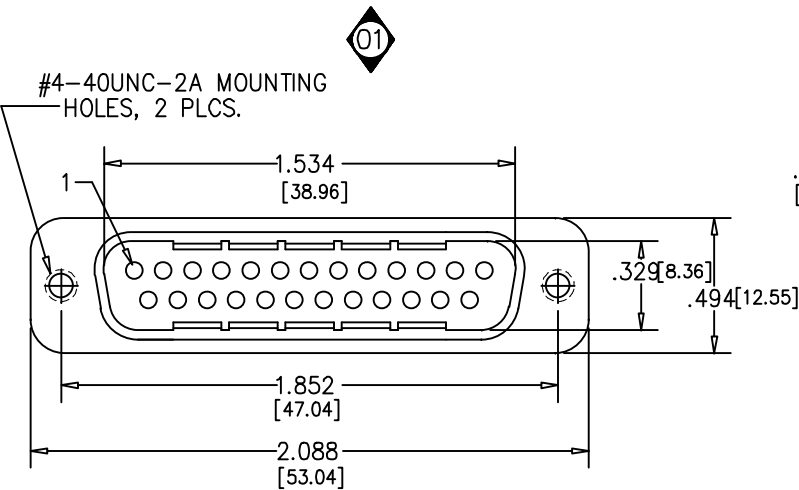

THIS DRAWING CONTAIN PROPRIETARY INFORMATION. SPECTRUM CONTROL RESERVES ALL RIGHTS. THIS DOCUMENT SHALL NOT BE REPRODUCED IN WHOLE OR IN PART FOR ANY PURPOSE.

			1	0	REV. NO.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. CADD SCALE: N/A PLOT SCALE: N/A	TOLERANCES UNLESS OTHERWISE SPECIFIED Fractions $\pm 1/64$ Dec. .xx $\pm$.010 Dec. .xxx $\pm$.015 Angles $\pm 0^{\circ} 30'$ CODE IDENT. NO. 33095	 CONNECTOR PRODUCTS DIVISION ERIE, PENNSYLVANIA			
			CN 183270	CN 6004	CHANGE NOTICE			SPECTRUM CONTROL INC.		Description PIN — PCB 25L FILTERED CONNECTOR	
								Dwn. SLAGLE			
								Date 6-24-97			
								Apvd. *		A	
						Sheet 1 of 1		56-721-002-GBL6			