

VI TELEFILTER**Filter specification****TFS 140AF****1/5****Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance:		
Input:	50	Ω
Output:	50	Ω

Characteristics**Remark:**

The reference level for the relative attenuation a_{rel} of the TFS 140AF is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 6 dB filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency TC_f is valid for both the reference frequency f_c and the frequency response of the filter in the operating temperature range.

D a t a		typ. value		tolerance / limit		
Insertion loss (reference level)	a_e	28,5	dB	max.	30	dB
Centre frequency at operating temperature	f_c	-			140 ± 0,25	MHz
Passband $f_c \pm f_y * (1-a)$	PB				27,2	MHz
Pass band tilt within PB		0,004	dB/MHz	max.	0,012	dB/MHz
Relative attenuation	a_{rel}					
20 MHz ... 119 MHz		52	dB	min.	40	dB
161 MHz ... 280 MHz		47	dB	min.	40	dB
Reflected attenuation compared to main signal		66	dB	min.	50	dB
Crosstalk attenuation compared to main signal		55	dB	min.	50	dB
Deviation from theoretical phase response	$\Delta\varphi$	1,1	deg	max.	4,0	deg
Deviation from theoretical frequency response	$\Delta\alpha$					
f_c ... $f_c \pm f_y * (1-a)$		± 0,1	dB	max.	± 0,2	dB
$f_c \pm f_y * (1-a)$... $f_c \pm f_y * (1+a)$		± 0,25	dB	max.	± 0,5	dB
Nyquist frequency	f_y	-			17	MHz
Roll-off factor	a	-			0,2	
Partitioning factor	p	-			1,0	
Group delay	at f_c	1,1	µs			
Group delay ripple within PB		10	ns	max.	25	ns
Input power level		-		max.	15	dBm
Operating temperature range	OTR	-			+ 45 °C	
Operable temperature range		-			- 45 °C ... + 85°C	
Storage temperature range		-			- 45 °C ... + 85°C	
Temperature coefficient of frequency	TC_f **	-72	ppm/K			

**) $\Delta f_c(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_o) \times f_{CAT}(\text{MHz})$.

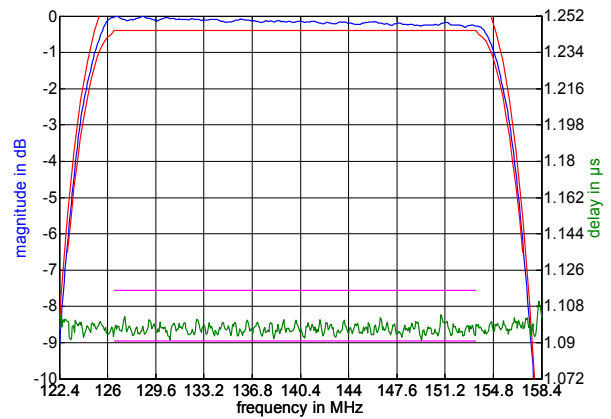
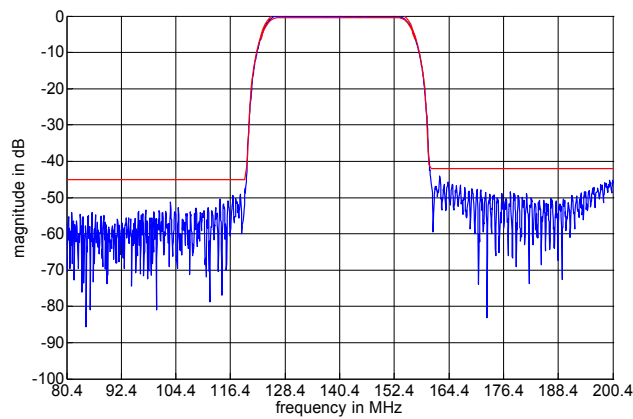
Theoretical frequency response :

$$\begin{cases}
 H(x) = (S(x))^p; & \text{where } x = \frac{f - f_c}{f_y} \\
 S(x) = \begin{cases} 1 & \text{for } |x| \leq (1-a) \\ \frac{1}{2} \cdot \left(1 + \cos \left(\frac{\pi (|x| - 1 + a)}{2a} \right) \right) & \text{for } (1-a) \leq |x| \leq (1+a), \\ 0 & \text{for } (1+a) \leq |x| \end{cases}
 \end{cases}$$

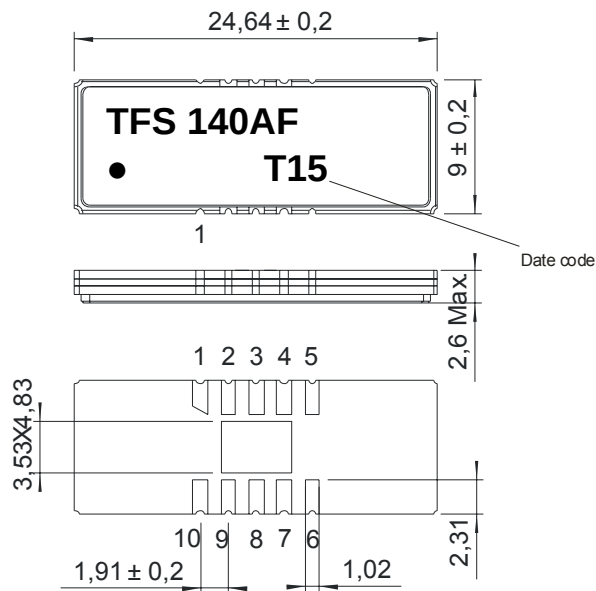
Generated:**Checked / Approved:**

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

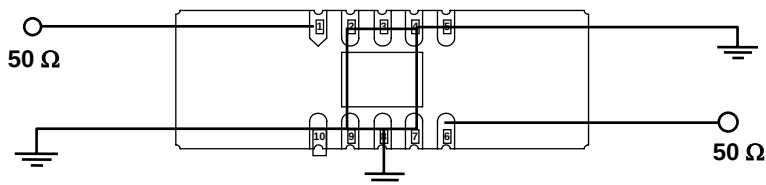
VI TELEFILTER**Filter specification****TFS 140AF****2/5****Filter characteristic****Construction and pin connection**

(All dimensions in mm)



- | | |
|----|------------------|
| 1 | Input |
| 2 | Ground |
| 3 | Ground |
| 4 | Ground |
| 5 | Output RF Return |
| 6 | Output |
| 7 | Ground |
| 8 | Ground |
| 9 | Ground |
| 10 | Input RF Return |

Date code: Year + week
 T 2005
 U 2006
 V 2007
 ...

Test circuit

Tele Filter GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 140AF****3/5****Stability characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

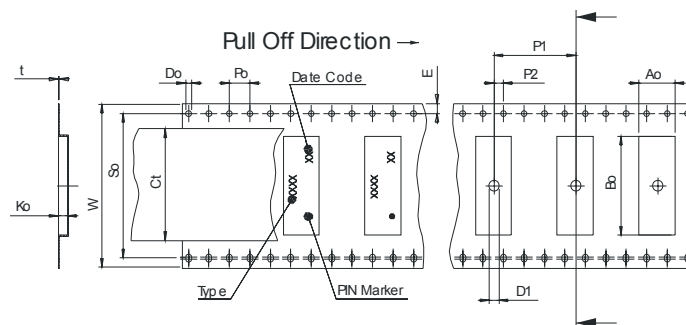
Packing

Tape & Reel: IEC 286 – 3, with exeption of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

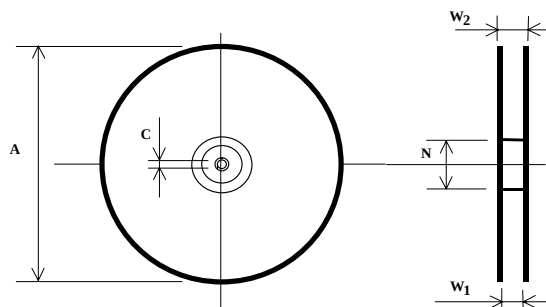
max. pieces of filters peer reel: 1000
reel of empty components at start: min. 300 mm
reel of empty components at start including leader: min. 500 mm
trailer: min. 300 mm

Tape (all dimensions in mm)

W	: 44,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 20,20 ± 0,15
P2	: 2,00 ± 0,15
P1	: 16,00 ± 0,1
D1(min)	: 2,00
Ao	: 9,30 ± 0,1
Bo	: 24,90 ± 0,1
So	: 40,40 ± 0,1
Ct	: 38,0 ± 0,1

**Reel (all dimensions in mm)**

A	: 330
W1	: 44,4 +2/-0
W2(max)	: 50,4
N(min)	: 100
C	: 13,0 +0,5/-0,2



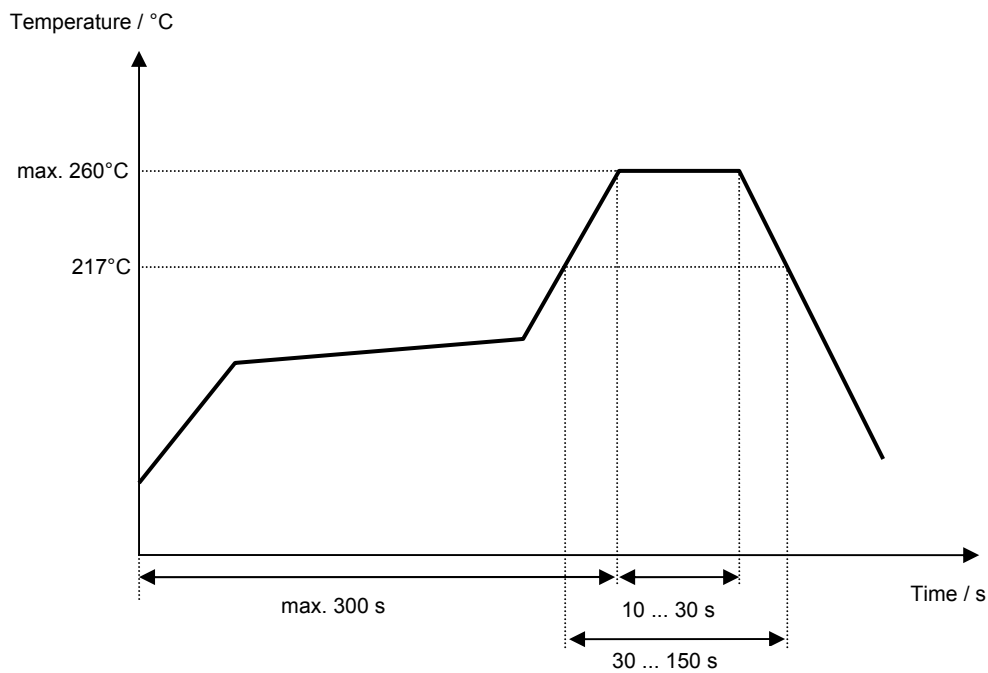
The minimum bending radius is 45 mm.

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

Chip-mount air reflow profile

VI TELEFILTER**Filter specification****TFS 140AF****5/5****History :**

Version	Reason of Changes	Name	Date
1.0	Generate development specification	Noack	27.05.2004
1.1	typical values and filter characteristic added frequency range of passband-stopband transition modified	Pfeiffer	05.10.2004
1.2	- air reflow temperature profile modified - set limits of centre frequency at operating temperature	Pfeiffer	08.04.2005