Product Details for 2 - 331351 - 4

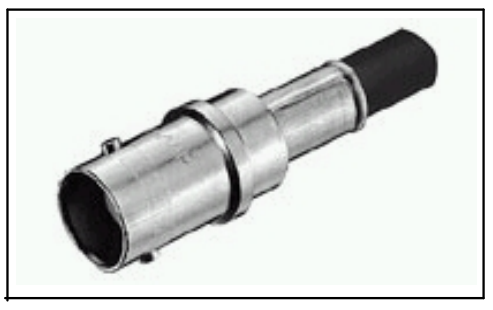

2 - 331351 - 4

Active

BNC RF Connectors

ELV Compliant (Find RoHS Compliant Alternates/Compliance Statement)

Product Highlights:

- Connector
- Connector Type = BNC
- Jack
- Terminate To Coaxial Cable
- Not Stacked

View all Features

Quick Links

Check Pricing & Availability
Search for Tooling
Product Feature Selector
Contact Us About This Product

Documentation & Additional Information

Product Drawings:

- JACK,DUAL CRIMP, SERIES BNC (PDF, English)

Catalog Pages/Data Sheets:

- INTERCONNECTS FOR NETWORKING (PDF, English)
- RF COAX PRODUCTS (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- 50-Ohm RF Series BNC Jack Connectors (Standard Dual ... (PDF, English)

CAD Files:

- None Available

List all Documents

Additional Information:

- Product Line Information

Related Products:

- Tooling

Product Features

(Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Connector
- Connector Type = BNC
- Gender = Jack
- Stacked = No
- Number of Ports = 1
- Crimp Type = Dual
- Body Style = Straight
- Grade = Military
- Body Insulation = Without
- Sealed = No
- Isolated = No
- Dielectric Material = TEFLON
- Coupling Nut Material = Brass
- Solder Terminal = Without

Mechanical Attachment:

- Surface Mountable = No
- Panel Attachment = Without

Electrical Characteristics:

- Connector Impedance (?) = 50

Termination Related Features:

- Coaxial Cable Termination Type = Crimp

Body Related Features:

- Hardware Included = No
- Body Plating = Silver
- Polarized = No

Contact Related Features:

- Center Contact Material = Beryllium Copper
- Center Contact Plating = Gold

Configuration Related Features:

- Coaxial Cable Type (RG/U or Mfg.) = 174, 188

Industry Standards:

- Government/Industry Qualification = No
- RoHS/ELV Compliance = ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was ELV compliant

Conditions for Usage:

- Terminate To = Coaxial Cable

Other:

- Brand = AMP

© 2006 Tyco Electronics Corporation All Rights Reserved