
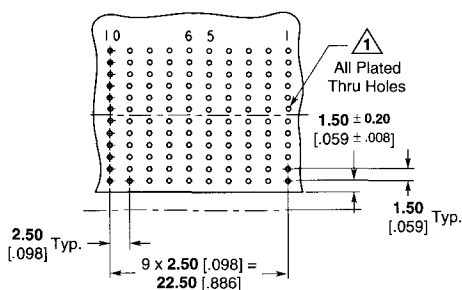


Z-PACK HM-Zd Connector

**4 Pair Right Angle
Receptacle Assemblies**

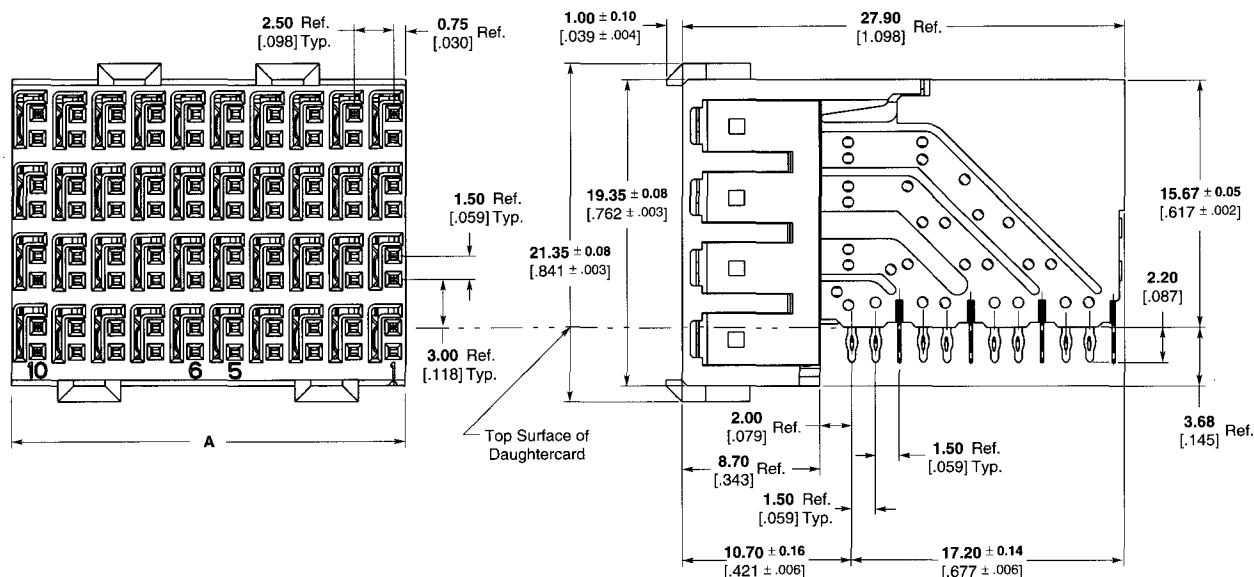

**Recommended PC Board Layout
Daughter Board, Component Side Shown**

- 1 PCB Hole Dim.
 Drilled Hole = **0.7000 ± 0.025** [.02756 ± .0010]
 Finished Hole = **0.60 ± 0.05** [.024 ± .002]
 Cu Thickness = **0.375 ± 0.0125** [.0148 ± .00049]
 SnPb Thickness = **0.007 ± 0.003** [.0003 ± .0001]

Note: For finishes other than tin-lead, reference Application Specification 114-13059.

Part Number	Column Count	Module Length (Dim. A)	Signals	Grounds	Application Tooling ²		
					Insertion Receptacle	Repair Housing Removal	Repair Chiclet Removal
1469001-1 ¹	10	25.00 .984	80	40	91347-1	1583224-1	1583248-1
1469286-1	12	30.00 1.181	96	48	91347-3	1583224-2	1583248-1
1469294-1	15	37.50 1.476	120	60	91347-2	1583224-3	1583248-1
1469061-1	20	50.00 1.969	160	80	91347-4	1583224-4	1583248-1

¹ AdvancedTCA Zone 2 Daughtercard Connector.

² See page 43 for Instruction Sheet Number.